





ALL DIMENSIONS METRIC

A 3	FIRST ANGLE	LENGTH / DIAMETER	0.5-6 >6-30 >30-120 >120-400 >400-1000 >1000-2000 >2000-4000	RADIUS / DIAMETER	0.5-3 >3-6 >6	ANGLE (shorter side length)	0-10 >10-50 >50-120 >120-400 >400
		TOLERANCE	±0.1 ±0.2 ±0.3	±0.5	±0.8	±2	±1

Z = LEG LENGTH	OTHER SIDE ARROW SIDE
ANSWER IN MM, NOT IN INCHES	ANSWER IN MM, NOT IN INCHES
WEAVING ON THIS DRAWING.	WEAVING ON THIS DRAWING.
DO NOT DRAW SYMBOLS	DO NOT DRAW SYMBOLS
TO ISO SYMBOLS	TO ISO SYMBOLS

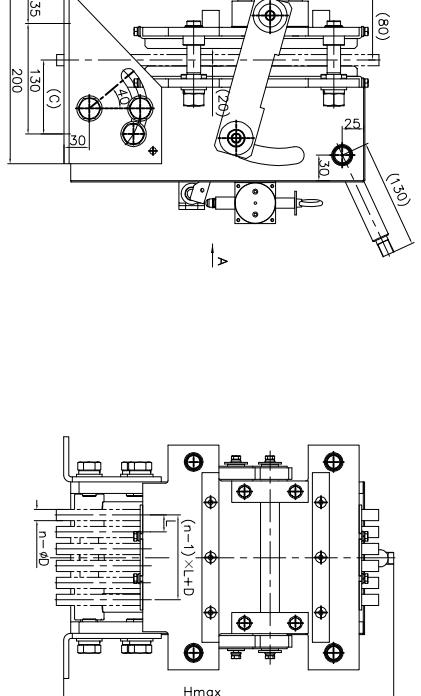

视图 A

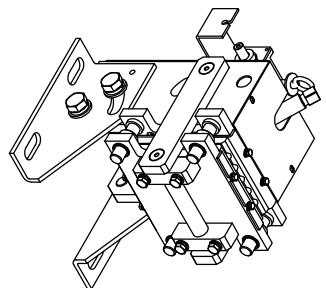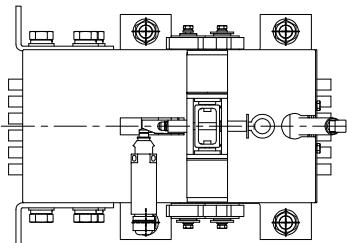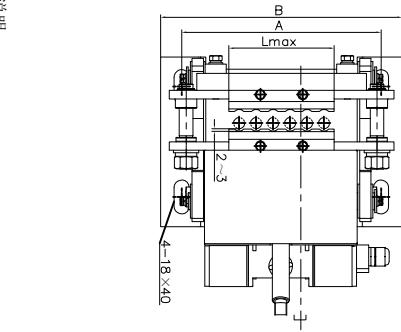

技术说明
1.本件根据实际使用情况不同，部分尺寸参数也将不同，具体选用按表；
2.安装使用时要求带夹板距钢丝绳间距为2~3mm，动板距离可通过增减垫片来调整；
3.本件实际的系统质量按型式试验报告，可使用与多种曳引方式，但其对应的参数将发生变化；
4.安装好后需将主体与安装架采用销轴固定；
5.本图所示OX-250机械式夹绳器（制停子系统）与OX-240BL限速器（检测子系统）组合后成为OX-250U（断意外移动）保护装置的重要组成部分。

视图 A

件号	载重kg 速m/min 材料牌号/mm 喷码	几何尺寸及公差		安装方法及基准A 参考B 参考C	WELDS
		Z	Lmax		
VKS6Z030001					
VKS6Z030002					
VKS6Z030003					
VKS6Z030004					
VKS6Z030005					
VKS6Z030006					
VKS6Z030007					
VKS6Z030008					
VKS6Z030009					
VKS6Z030010					
VKS6Z030011					
VKS6Z030012					
VKS6Z030013					
P0K5Z030014/VBK1508	3000 0.5 2.1	Φ16	5 25	喷码 270 315 81.5 450 180	
VKS6Z030015					2000-6500
VKS6Z030016					
VKS6Z030017					
VKS6Z030018					
VKS6Z030019					
VKS6Z030020					
VKS6Z030021					
VKS6Z030022					
VKS6Z030023					
VKS6Z030024					
VKS6Z030025					
VKS6Z030026					

标记 MARK	更改原因及说明 CHANGE REASONS AND INSTRUCTIONS		
	更改日期 CHANGE DATE	更改 CHANGE	审查 CHECK 版本 VERSION
(1) 增加件号,共12处(一般通用件需另算);	2017.07.26	王勇新	徐勇 7701 批准 APPRO 曹阳 MATERIAL: VKS6Z030001 SHEET 1 1 SHEET
变更原因及说明 CHANGE REASONS AND INSTRUCTIONS	更改日期 CHANGE DATE	更改 CHANGE	审查 CHECK 版本 VERSION