
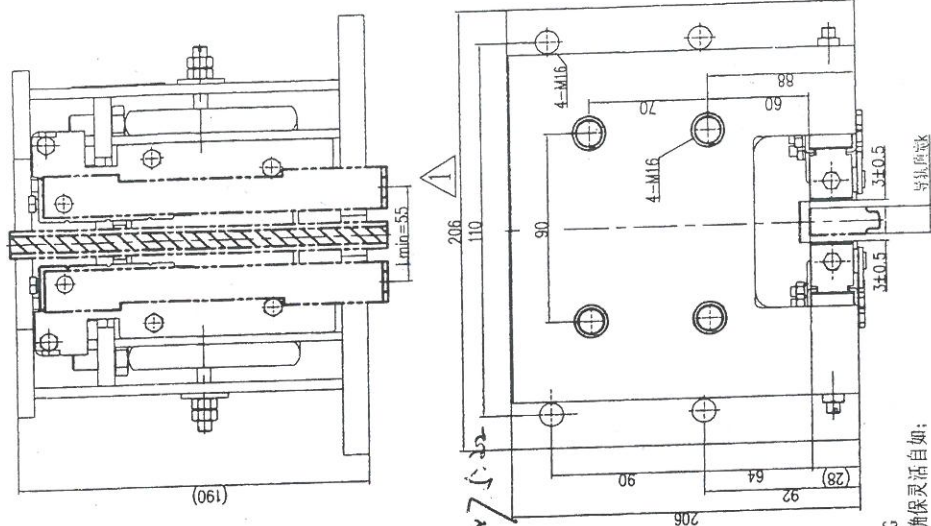


件号	额定速度 (m/s)	适用 (P+Q) 范围 (kg)	导轨宽度 (mm)
TTA3H012001		810 ≤ P+Q ≤ 870	
TTA3H012002		871 ≤ P+Q ≤ 1000	
TTA3H012003		1001 ≤ P+Q ≤ 1140	
TTA3H012004		1141 ≤ P+Q ≤ 1290	
TTA3H012005		1291 ≤ P+Q ≤ 1450	
TTA3H012006		1451 ≤ P+Q ≤ 1620	
TTA3H012007		1621 ≤ P+Q ≤ 1800	10
TTA3H012008		1801 ≤ P+Q ≤ 2000	
TTA3H012009		2001 ≤ P+Q ≤ 2200	
TTA3H012010		2201 ≤ P+Q ≤ 2400	
TTA3H012011		2401 ≤ P+Q ≤ 2650	
TTA3H012012		2651 ≤ P+Q ≤ 2900	
TTA3H012013	0.25 ≤ V ≤ 2.5	2901 ≤ P+Q ≤ 3200	
TTA3H012014	0.25 ≤ V ≤ 2.5	3201 ≤ P+Q ≤ 3500	12
TTA3H012015		3501 ≤ P+Q ≤ 4000	
TTA3H012016		4001 ≤ P+Q ≤ 4500	
TTA3H012017		4501 ≤ P+Q ≤ 5000	
TTA3H012018		5001 ≤ P+Q ≤ 5500	
TTA3H012019		5501 ≤ P+Q ≤ 6000	
TTA3H012020		6001 ≤ P+Q ≤ 6500	
TTA3H012021		6501 ≤ P+Q ≤ 7000	
TTA3H012022		7001 ≤ P+Q ≤ 7500	
TTA3H012023		7501 ≤ P+Q ≤ 8000	
TTA3H012024		8001 ≤ P+Q ≤ 8500	
TTA3H012025		8501 ≤ P+Q ≤ 9000	
TTA3H012026		9001 ≤ P+Q ≤ 9500	

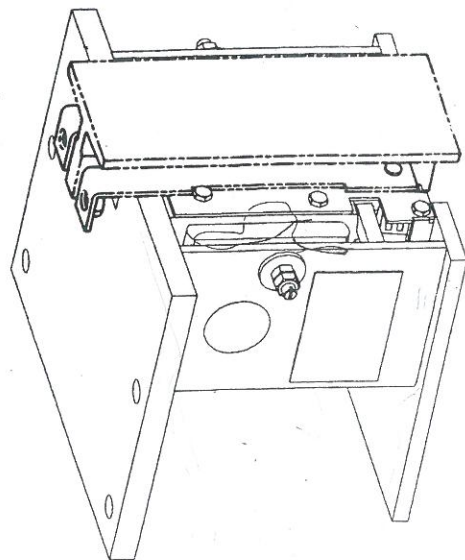

1. 本件适用额定速度: $< 2.5 \text{ m/s}$, 允许系统质量 $(P+0) = 809.5125 \text{ KG}$
2. 装配时活动模块与钥匙滑动块涂上润滑油; 装配后各活动部位确保灵活自如;
3. 件7为左右对称各一件, 生产时螺栓按生产指令要求标记按图10;
4. 装配调整后在调整部位点上红漆且按要求装钉铭牌及合格证;
5. 根据 GB7588-2003 或顾客其它需求, 对安全链进行调试, 附《OX188调试参数》;
6. 适用于双束拉结构;

[illegible]

东南出版

材料：組裝件

安全钳

TTA3H01Z

共 1 张 第 1 张