


$A \curvearrowright 180^\circ$

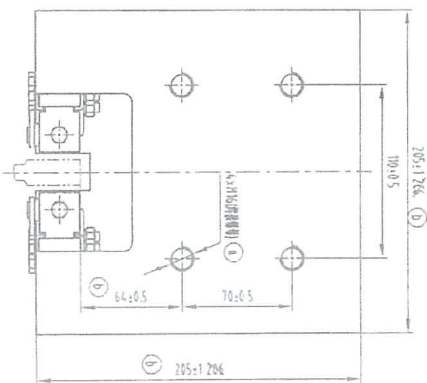

測試材料	測試結果	測試ID (ID)	V	k
X1 A2B6AAAX01	4400P-P-04A200	4400P-P-04A200		
X1 A2B6AAAX02	4200P-P-04A400	4200P-P-04A400		
X1 A2B6AAAX03	4400P-P-04A400	4400P-P-04A400		
X1 A2B6AAAX04	4600P-P-04A400	4600P-P-04A400		
X1 A2B6AAAX05	4800P-P-04A500	4800P-P-04A500		
X1 A2B6AAAX06	AX3000A270P	5500P-P-04A500	0.25VAC75	lb
X1 A2B6AAAX07		5200P-P-04A500	5100	
X1 A2B6AAAX08		5600P-P-04A500		
X1 A2B6AAAX09		5400P-P-04A500		
X1 A2B6AAAX10		5800P-P-04A500		
		6650		

519 ~ 530 ~

参数名	中文描述
h (mm)	导流罩前而宽度
V (m/s)	射流速度

二、協和

Q 姓名 张空白无 Logo, C 证标

5 制定信息保留、英文标注

[illegible]

(c)	3	210x1.25 标准型 121x1.20 带绳头绳夹	绳头	25.8.2	 宁波奥德普电梯部件有限公司 NINGBO AODEPU ELEVATOR COMPONENTS CO., LTD.	
(d)	6	600x1250x50 125x125x50 75x50 50x50x50, 44	半生	24.10.15		
(e)	7	绳头绳夹, 绳头绳夹绳夹	绳头绳夹	22.7.18		
备注 处数		更改内容		签名	日期	安全钳

[illegible]