
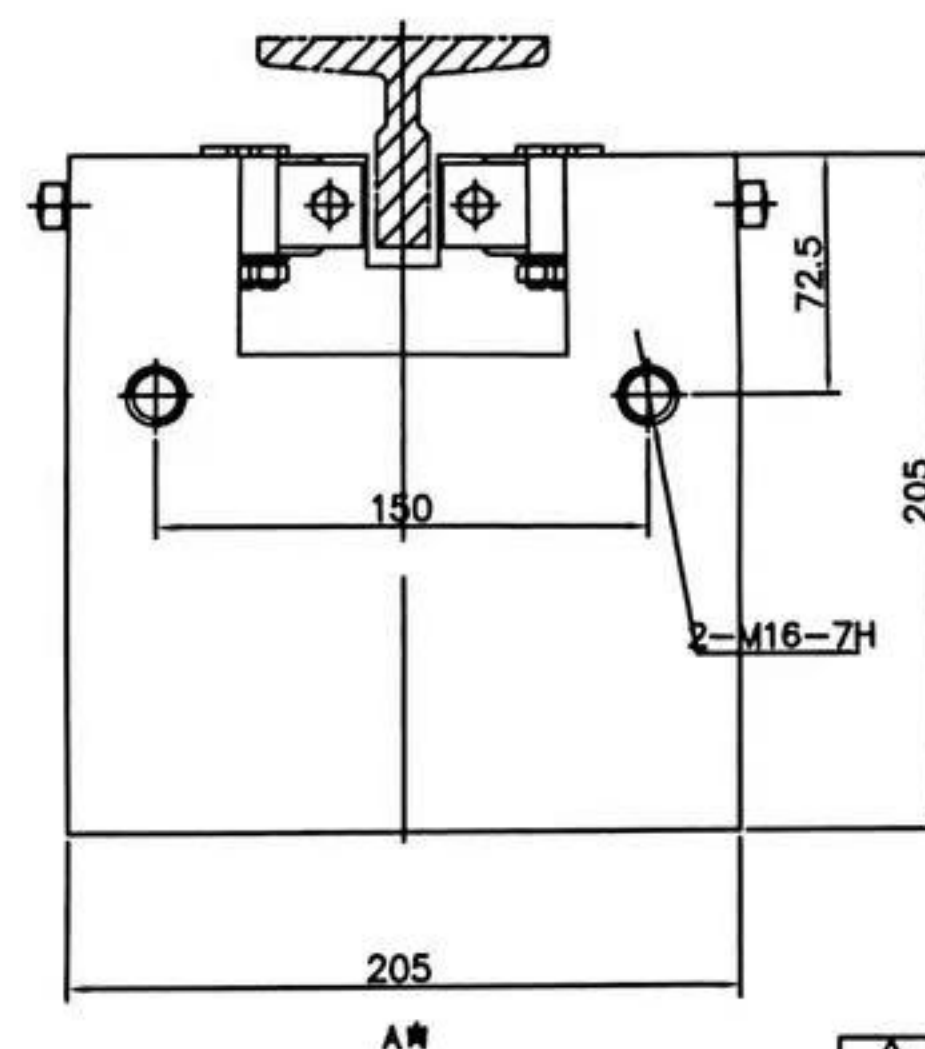
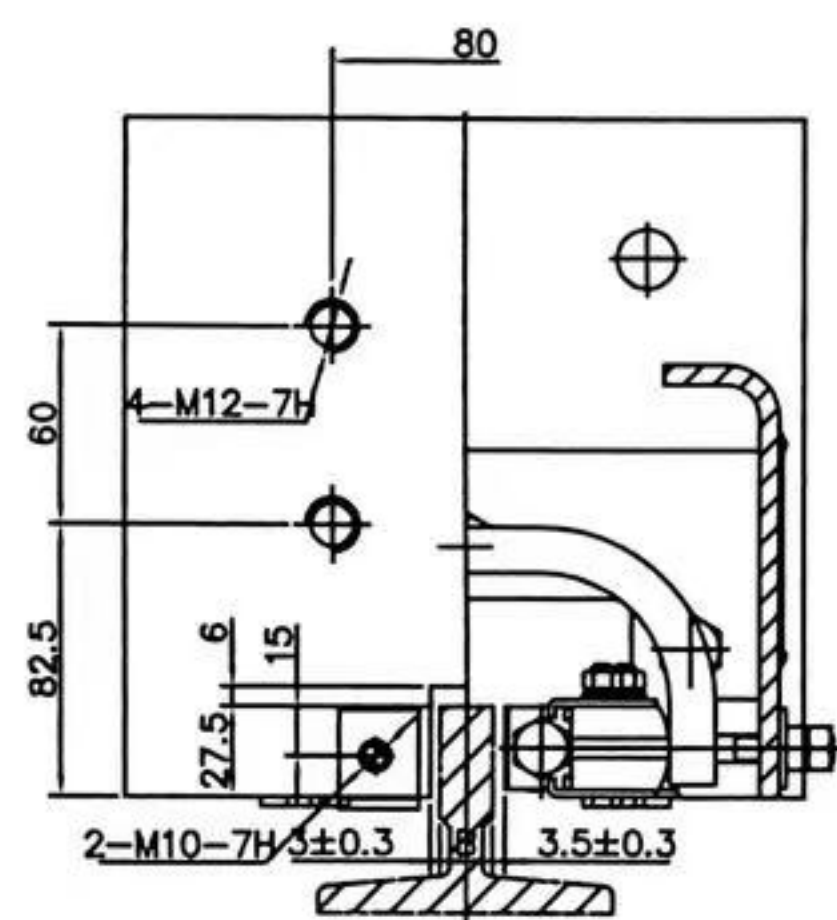


A3	比例	公称尺寸						公差	角度 (度)			公差					焊接	
		0.5-6	6-30	30-120	120-400	400-1000	1000-2000		0.5-3	3-6	6	0-10	10-50	50-120	120-400	400		
		±0.1	±0.2	±0.3	±0.5	±0.8	±1.2		±0.2	±0.5	±1	±1'	±0.5'	±0.3'	±0.15'	±0.1'		

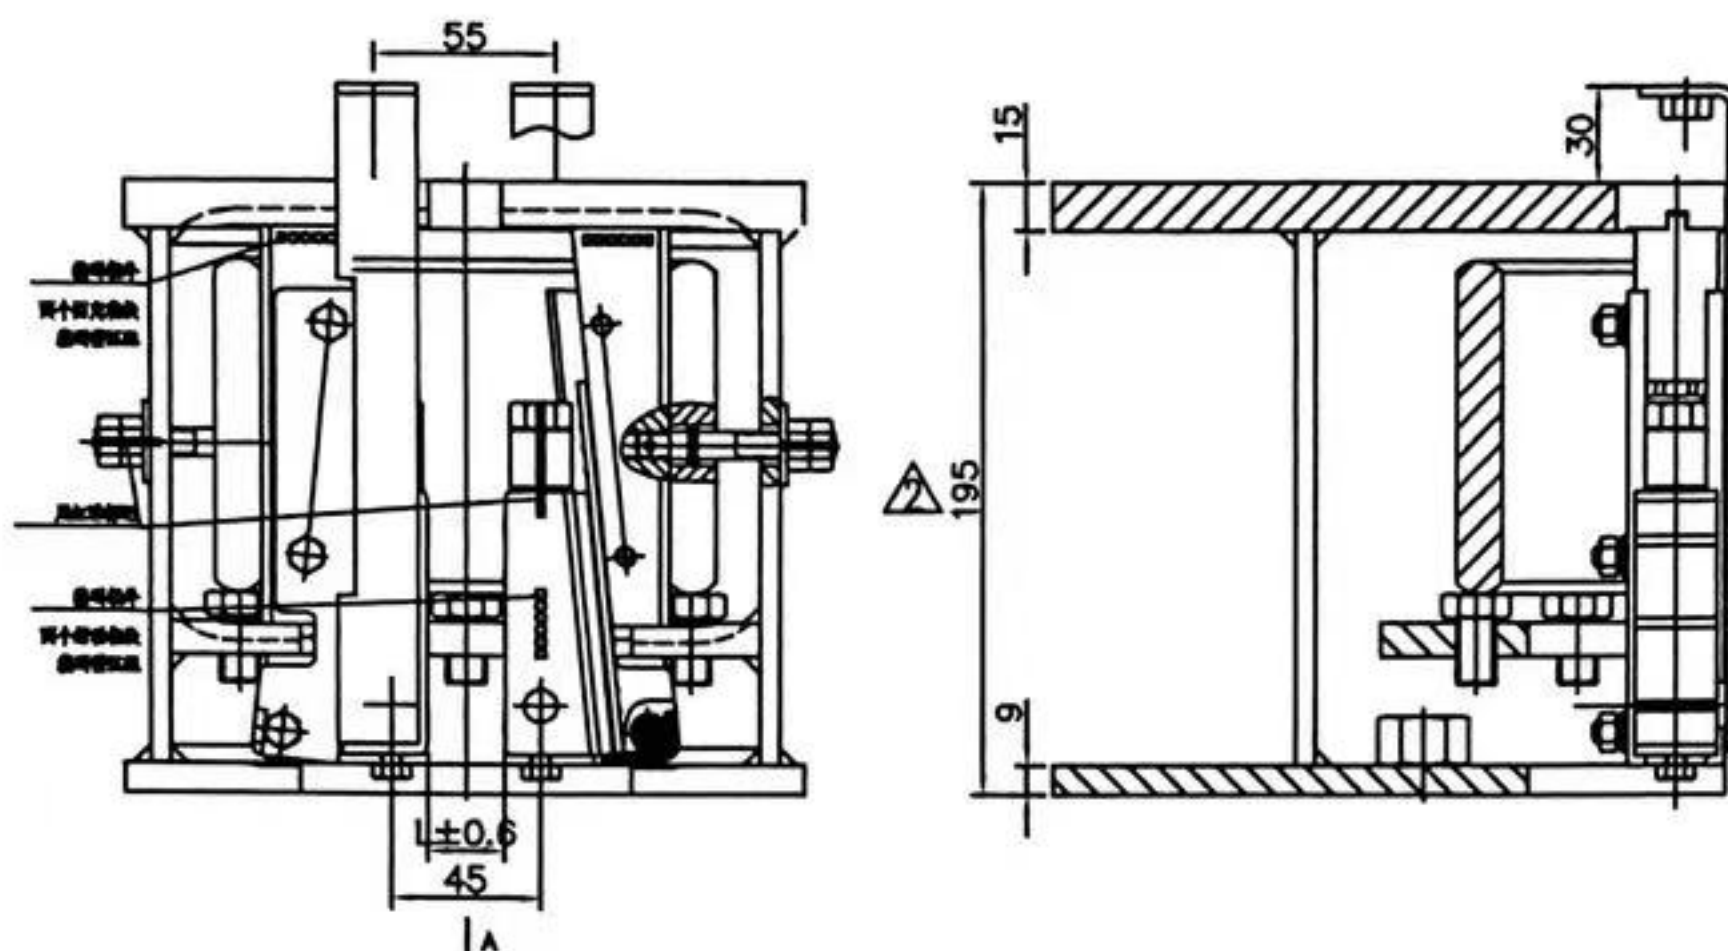

技术要求

1. 本安全钳适用于电梯额定速度 $V=0.25-2.5\text{m/s}$,轿厢自重与额定总载荷 $(P+Q)$ 为 $1000-4000\text{kg}$,实际应用总质量范围不应超过允许质量 $\pm 7.5\%$;
2. 本安全钳适用导轨硬度 $\leq \text{HB143}$,导轨工作面宽度 $B=10-15.88-16\text{mm}$,且导轨表面的防锈油务必用合适的清洗剂加以清除干净;
3. 固定模块与轿体之间的运动面涂HM46抗磨液压油;
4. 装配时两滑动模块摩擦面间距的中心面与轿体凹槽的中心面偏差 <0.2 ;
5. 两滑动模块最大行程 69mm 。

件号	额定速度	总容许质量 $(P+Q)$	导轨状况	导轨面工作宽度	型号
P/N	m/s	Kg		B(mm)	
MSA3H506-001	$0.25 < V \leq 2.5$	$1200 < P+Q \leq 3000$	润滑	15.88	
99, PMSA3H506-001/非标准	$0.25 < V \leq 2.5$	$1200 < P+Q \leq 3000$	润滑	10	
MSA3H506-003	$0.25 < V \leq 2.5$	$3600 < P+Q \leq 4000$	润滑	15.88	
MSA3H506-004	$0.25 < V \leq 2.5$	$4200 < P+Q \leq 4400$	润滑	15.88	
MSA3H506-005	$0.25 < V \leq 2.5$	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-006	$0.25 < V \leq 2.5$	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-007	$0.25 < V \leq 2.5$	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-008	$0.25 < V \leq 2.5$	$4200 < P+Q \leq 4400$	润滑	16	
MSA3H506-009	2	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-010	2	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-011	2	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-012	2	$4200 < P+Q \leq 4400$	润滑	16	
MSA3H506-013	2.5	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-014	2.5	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-015	2.5	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-016	2.5	$4200 < P+Q \leq 4400$	润滑	16	
MSA3H506-017	1	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-018	1	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-019	1	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-020	1	$4200 < P+Q \leq 4400$	润滑	16	
MSA3H506-021	1.5	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-022	1.5	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-023	1.5	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-024	1.5	$4200 < P+Q \leq 4400$	润滑	16	
MSA3H506-025	1.75	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-026	1.75	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-027	1.75	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-028	1.75	$4200 < P+Q \leq 4400$	润滑	16	

导轨面宽10mm, 导轨安装孔距非标

用于设备号: 26MLSC51587-51588

标记	数量	分区	更改文件号	签名	年月日
设计	特伟良	20170810	标准		
校对	特伟良	20170810			
审核					
工艺					

宁波奥德普



安全钳

MSA3H506

阶段标记

重量

比例

- - - -

kg

1:3

共 1 页 第 1 页