


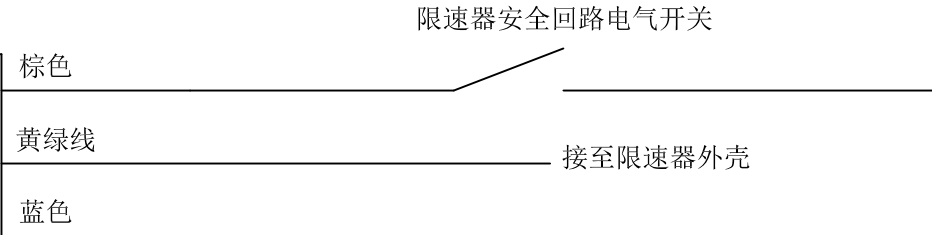


																					焊接																				
A3		基础尺寸	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000	辐射切割	>0.5-3	>3-6	>6	角度(短边)		0-10	>10-50	>50-120	>120-400	>400																					
		公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	公差	±0.2	±0.5	±1	公差		±1°	±0.5°	±0.3°	±0.15°	±0.1°																					
件号：GEL8B064001按此接线																																									
AMP 3P母插件，型号：AMP-480701 插件打标“3M” AMP母插针，型号：350536													1	棕色																											
													2	黄绿线	接至限速器外壳																										
													3	蓝色																											
件号：GEL8B064002按此接线																																									
电磁铁电压AC220V时：													1	棕色	动作电磁铁																										
													2	蓝色																											
													3	棕色	释放电磁铁																										
													4																												
电磁铁电压DC24V时：													1	24V+	动作电磁铁																										
													2	24V-																											
													3	24V+	释放电磁铁																										
													4																												
△																																									
旧底图总号																																									
底图总号																																									
描 图				△														GLARIE		首次发布版本		图号		GEL8B064																	
				△																191101		名称		限速器接线																	
签 字		日 期		△														绘 图		周 雨						20191114		比例		1:1											
				△		1		增加DC24V电磁铁正负极描述		191226		周 雨		顾正龙		191220		校 对		李 勇		20191114		共 1 页		材料															
				记号		处数		更 改 原 因 及 说 明		更改日期		更改者		审查者		变更版本		审 核		顾正龙		20191114		第 1 页																	