

匹配安全钳：OX-188、OX-188A等

提拉形式：下置双提拉

技术条件：导轨顶面距离DBG≥850mm (可配UKS开关用户自理)

预紧提拉力建议值150N~200N(具体根据实际需要)




Mating safety gear: OX-188、OX-188A

Pulling form: underlying double pulling




Technical condition: rail guide top distance DBG≥850mm
(UKS switch applicable)

Advised pretension pulling force 150N~200N(depending on the actual needs)

80000414 法斯特 P1-1
DBG=900 本色RAL6005 中英文

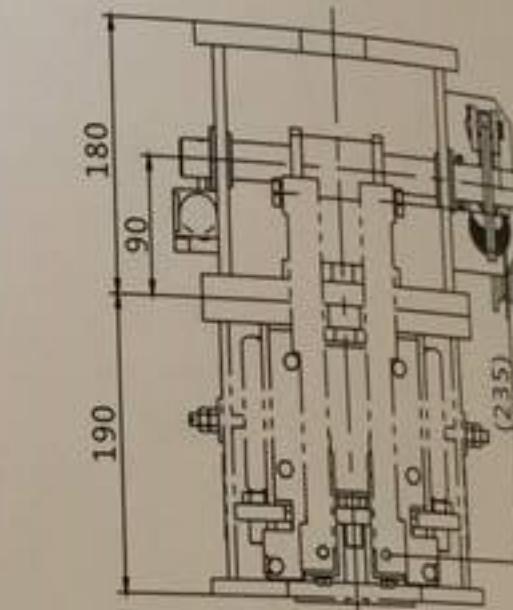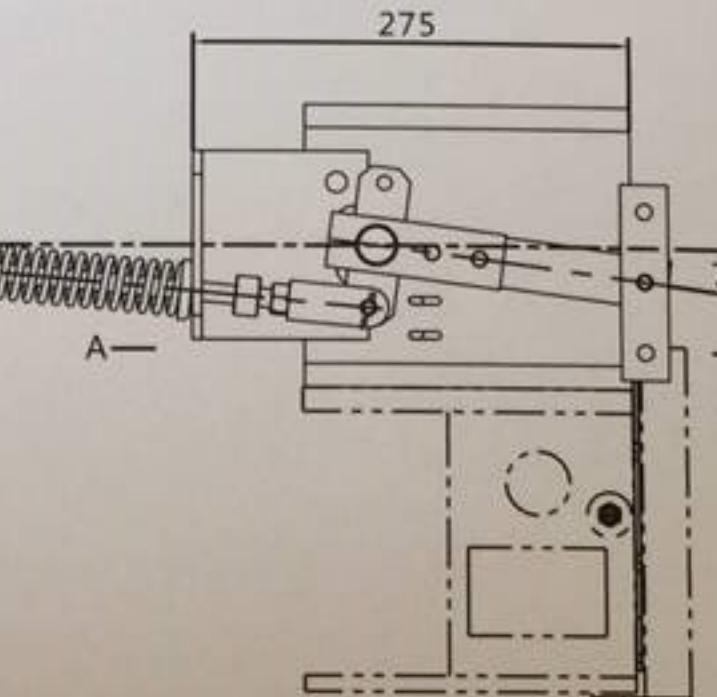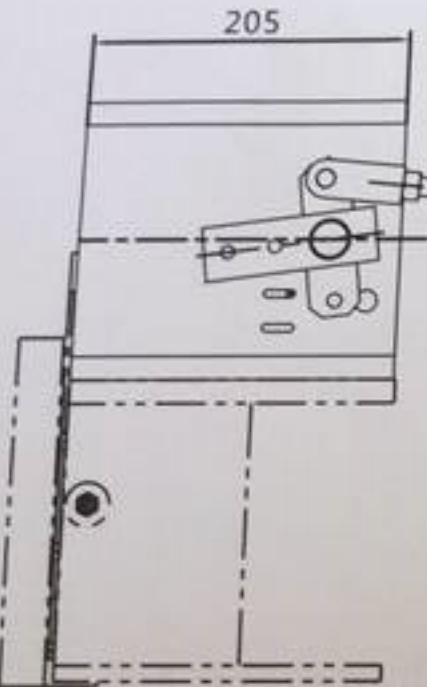

导轨面距DBG(建议参数DBG > 850)

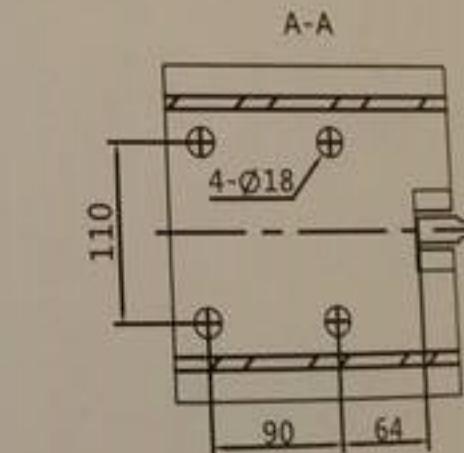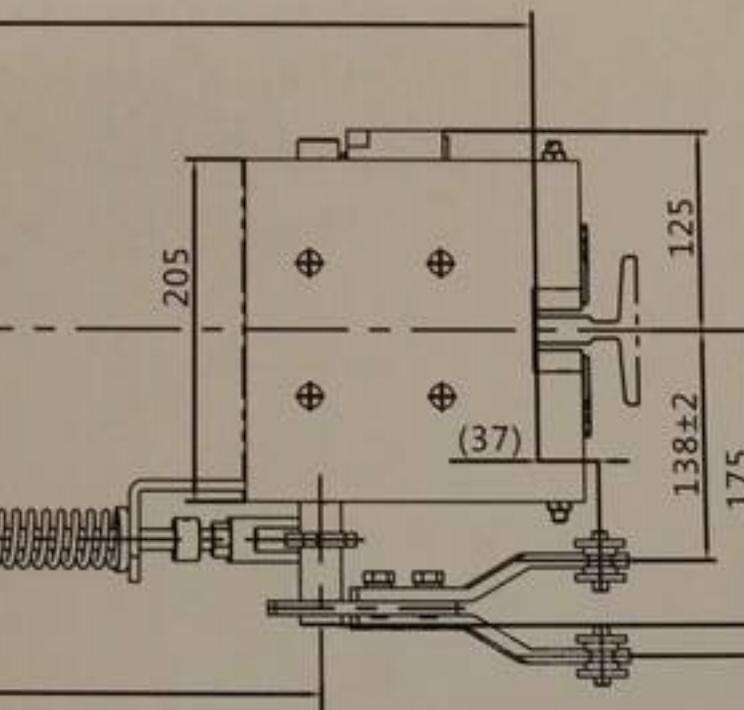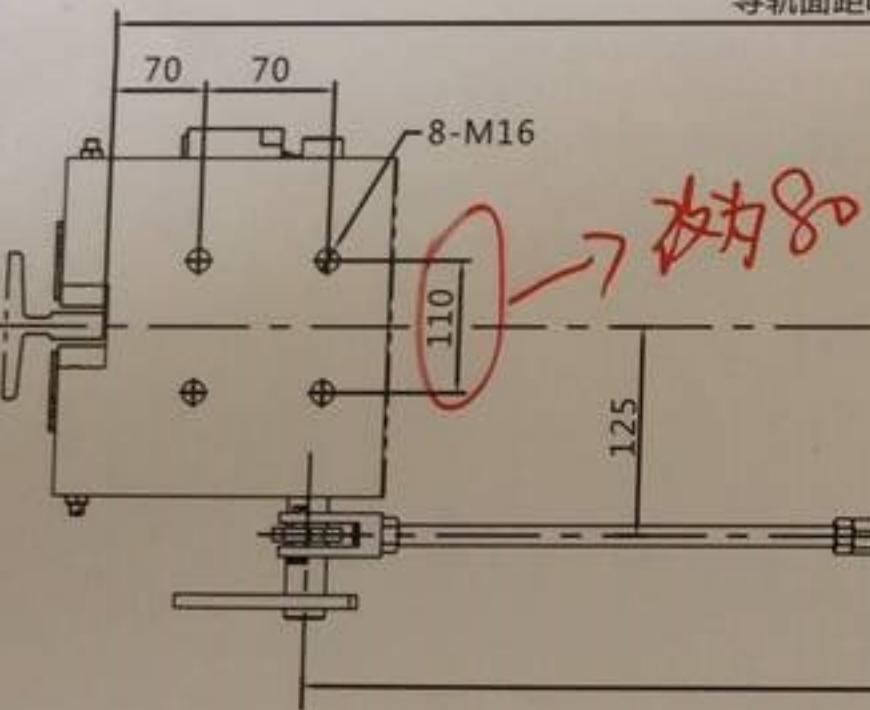

L1=DBG-270