
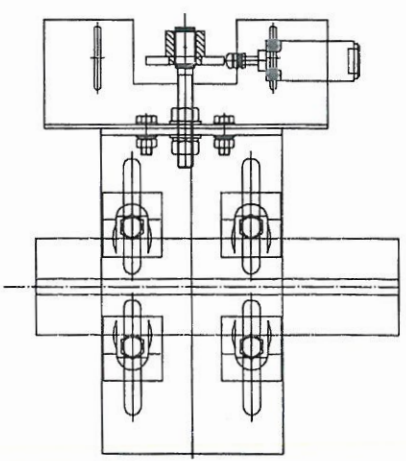


80000599 巨立电梯 P1-3 PV16529A02/A04
240-8 重晶石30kg 灰色RAL7037 全英文

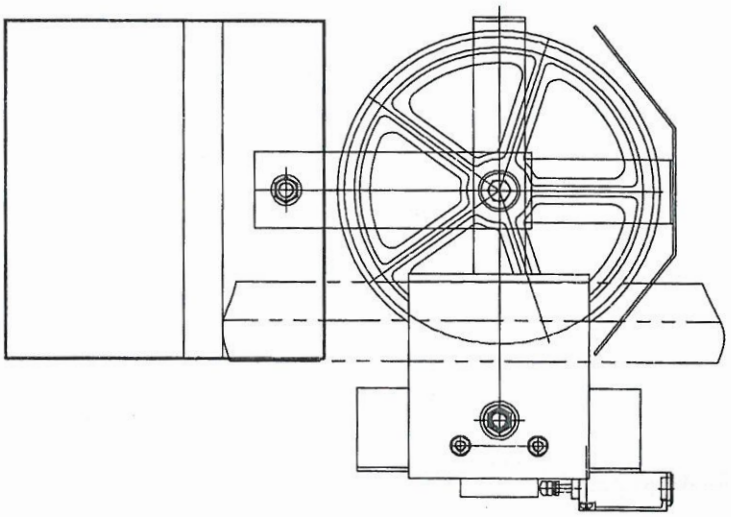


清石前次门数

2016.3.25 技术要求 (A02/A04)

张紧轮和缓冲组件转动平顺、灵活、无卡滞现象
运行电梯额定速度 $\leq 2.5\text{m/s}$

巨立电梯

一次性用图

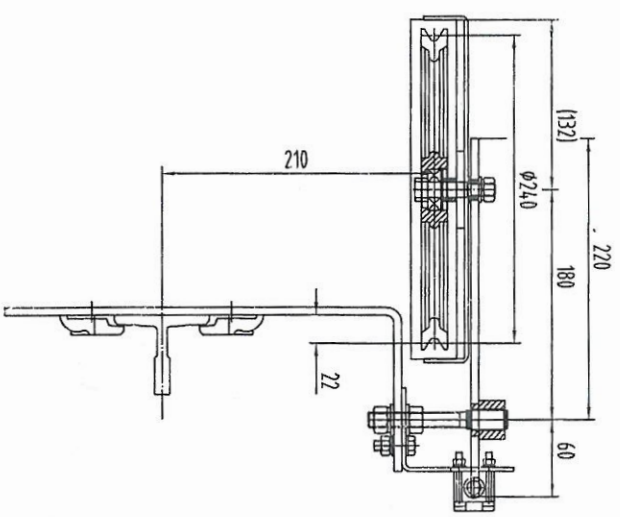

设计		人数	更改文件号	签名	日期	质量	9		限定器或安全装置 (对重制)	
校对				标准化			检验标记		OX-200 (XA)	
审核							A3		PV16529A02/A04	
工艺				批准			共 张 第 张		PV16529A02/A04	

Technical drawing of a rectangular plate with four elongated oval holes. The plate has overall dimensions of 140 (width) by 315 (height). The holes are arranged in a 2x2 grid. The distance between the centerlines of the holes is 110 (horizontal) and 92 (vertical). The distance from the top edge to the centerline of the top row of holes is 185. The distance from the left edge to the centerline of the left column of holes is 75. Each hole is labeled "4-13X90".




深喜

OX2001-1
FV6529/802/800

Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: 280
- Overall height: 60
- Distance from the left edge to the center of the large hole: 180
- Distance from the top edge to the center of the large hole: 60
- Large hole diameter: $\phi 23$
- Small hole diameter: $\phi 16.2$
- The small hole is located on the right edge, centered vertically.

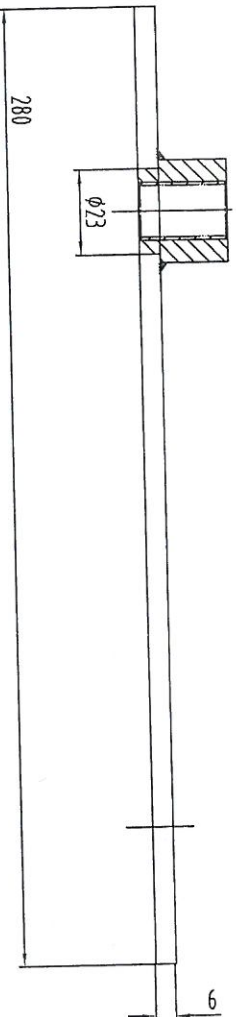

—φ18配管長さ151826

3	1525	直板	1	数量	573-4163011	FAX 573-4162830
2	0X002-12	板	1			
1	0X002-11	板	1	0.235/6*60型		
序号	图号	名称	数量	材料	备注	

[illegible]

108/25/159A