
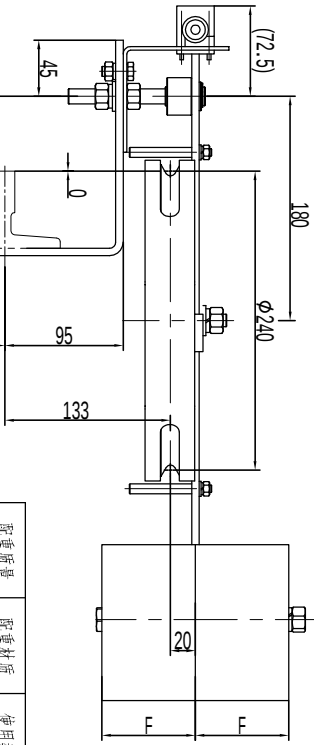
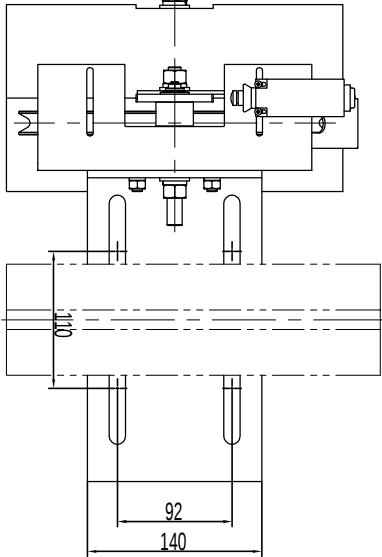




002X0

80000943 OX-200 涨紧装置 克莱斯电梯 P1-2
(240-90-133-0) 240-8 重晶石16KG 本色RAL6005 中英文

基本尺寸	0-6	6-30	30-120	120-400	400-1000	1000-2000	2000-4000
公差	0.1	0.2	0.3	0.5	0.8	1.2	2.0

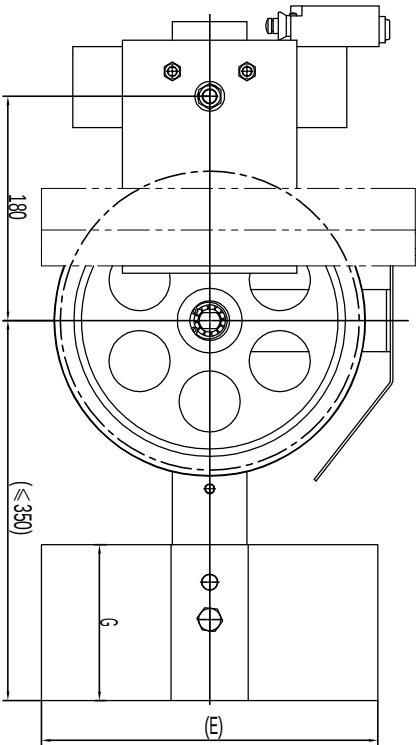

配重质量	配重材质	使用数量	E	F	G
12KG	铸铁	2	210	45	85
16KG		2	280	50	85
16KG	重晶石	2	265	70	130
24KG		2	285	85	165

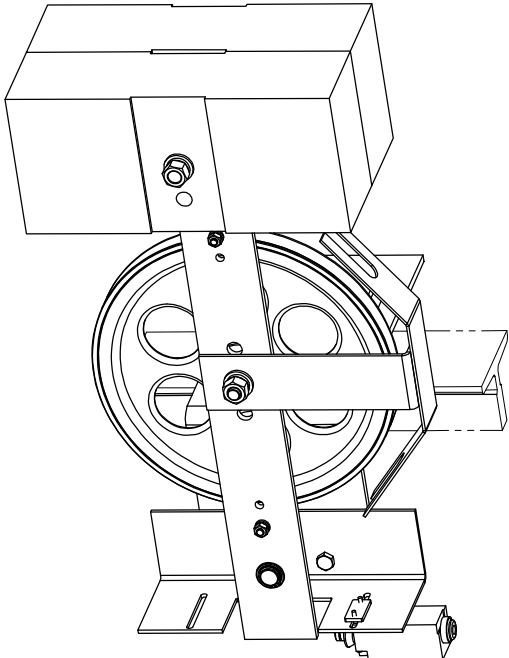

- 技术说明
1. 本图按图例绘制，具体使用时根据指令配表(注意绳槽节径、绳槽规格等)；
 2. 配重A值根据指令要求，本图按图例240kg铸铁配重绘制；
 3. 配重A值根据指令要求，本图按图例240kg重晶石配重绘制；
 4. 参数G与导轨位置及其绳槽情况对应，使用时需特别注意。

总装图										宁波奥德普电铸零件有限公司									
涨紧装置																			
设计				标准		文件更改号		签名		年、月、日									
校对																			
审核																			
工艺				批准															

