

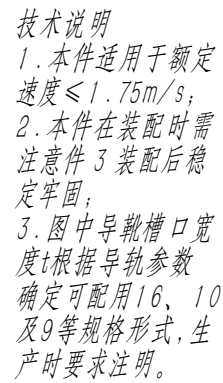
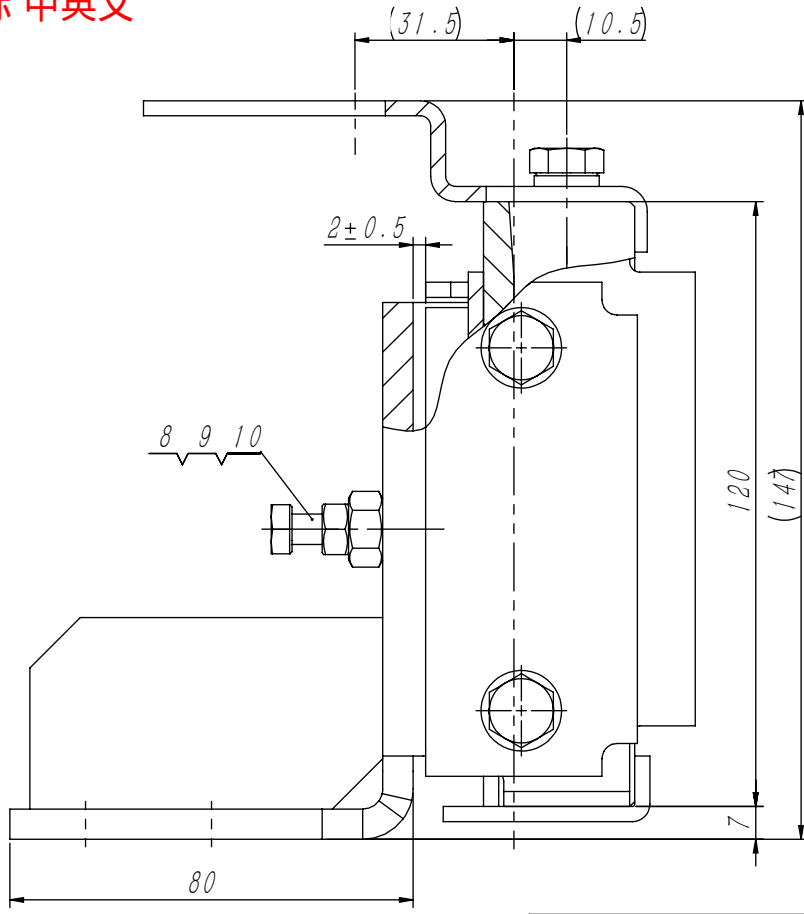
620X0

80001014 OX-029导靴(A01) 立达博士 P1-2

This exploded view diagram illustrates the assembly of a mechanical component. The parts are labeled as follows:

- 1**: A base plate with a central circular hole and a larger, horizontally-oriented oval slot.
- 2**: A vertical support plate with a central circular hole, a top flange, and a bottom flange.
- 3**: A horizontal plate with a central circular hole and a top flange.
- 4**: A vertical plate with a central circular hole and a top flange.

The diagram shows the relative positions and alignment of these parts, with dashed lines indicating the assembly path and the final assembled state. The parts are shown in a perspective view, with the base plate (1) at the bottom, the vertical support plate (2) in the center, and the horizontal plate (3) and vertical plate (4) positioned above it.



12	GB/T 6170-2000	六角螺母M8	2		0.01	0.02	
11	OX029-2	油壶安装架	1	钢板Q235A/3.0	0.19	0.19	
10	GB/T 5783	螺栓M6×35	1		10.34	10.34	标准件
9	GB/T 6170-2000	六角螺母M6	1		0.00	0	
8	OX029.2.1-3	调节螺母	1	Q235A	0.01	0.01	
7	GB/T 5783	螺栓M8×16	6		12.11	72.66	标准件
6	GB/T 93	弹性垫圈8	6		1.12	6.72	标准件
5	GB/T 97.1	平垫圈8	4		1.82	7.28	标准件
4	OX029-1	盖板	2	钢板Q235A/3.0	0.14	0.28	
3	OX450T	靴衬	1	高分子量聚乙烯	0.06	0.06	
2	OX029.2	靴衬支架	1		0.52	0.52	
1	OX029.1	导靴座	1		1.01	1.01	

宁波奥德普电梯部件有限公司

滑动导靴

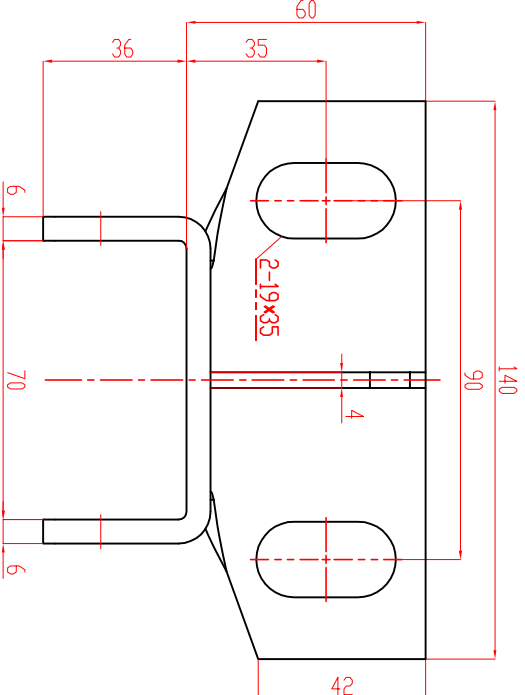
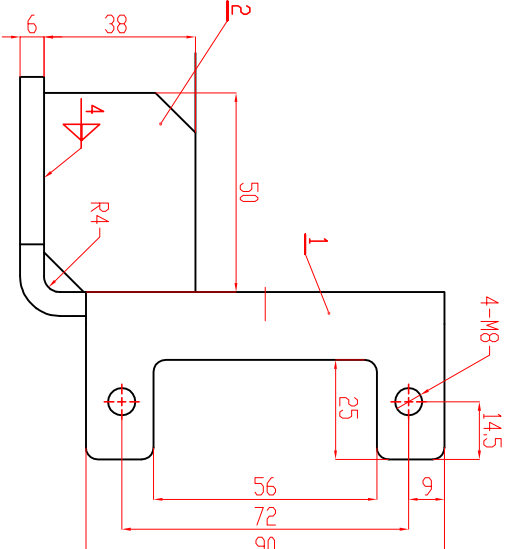
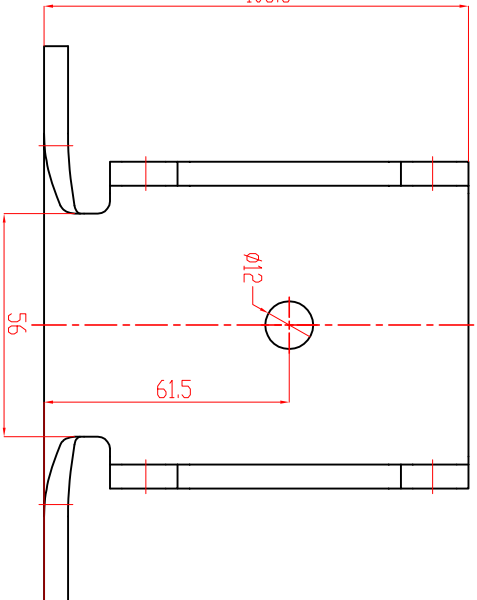
0X029

借(通)用件登记
旧底图总号
底图总号
签 字
日 期

□X029,1

女衣座非物 中夾义

基本尺寸	0~6	6~30	30~120	120~400	400~1000	1000~2000	2000~4000
公差	0.1	0.2	0.3	0.5	0.8	1.2	2.0

[illegible]