



A3		基準尺寸		基準尺寸		基準尺寸		基準尺寸		基準尺寸		基準尺寸		基準尺寸	
基準尺寸		0.5-6		>5-30		>30-120		>120-400		>400-1000		>1000-2000		>2000-4000	
公 差		±0.1		±1.2		±0.2		±0.3		±0.5		±0.8		±1.2	
基準尺寸		±0.2		±0.5		±1.0		±1.2		±1.5		±2.0		±2.5	
基準尺寸		±0.5		±1.0		±1.5		±2.0		±2.5		±3.0		±3.5	
基準尺寸		±1.0		±2.0		±3.0		±4.0		±5.0		±6.0		±7.0	
基準尺寸		±1.5		±3.0		±5.0		±7.0		±10.0		±15.0		±20.0	
基準尺寸		±2.0		±4.0		±6.0		±8.0		±12.0		±18.0		±25.0	
基準尺寸		±2.5		±5.0		±7.0		±10.0		±15.0		±20.0		±30.0	
基準尺寸		±3.0		±6.0		±9.0		±12.0		±18.0		±25.0		±35.0	
基準尺寸		±3.5		±7.0		±10.0		±15.0		±22.0		±30.0		±45.0	
基準尺寸		±4.0		±8.0		±12.0		±18.0		±25.0		±35.0		±50.0	
基準尺寸		±4.5		±9.0		±13.0		±20.0		±28.0		±40.0		±60.0	
基準尺寸		±5.0		±10.0		±15.0		±22.0		±30.0		±45.0		±65.0	
基準尺寸		±5.5		±11.0		±17.0		±24.0		±32.0		±48.0		±70.0	
基準尺寸		±6.0		±12.0		±18.0		±25.0		±33.0		±50.0		±75.0	
基準尺寸		±6.5		±13.0		±19.0		±26.0		±34.0		±52.0		±78.0	
基準尺寸		±7.0		±14.0		±20.0		±27.0		±35.0		±54.0		±80.0	
基準尺寸		±7.5		±15.0		±21.0		±28.0		±36.0		±56.0		±85.0	
基準尺寸		±8.0		±16.0		±22.0		±29.0		±37.0		±58.0		±88.0	
基準尺寸		±8.5		±17.0		±23.0		±30.0		±38.0		±60.0		±90.0	
基準尺寸		±9.0		±18.0		±24.0		±31.0		±39.0		±62.0		±92.0	
基準尺寸		±9.5		±19.0		±25.0		±32.0		±40.0		±64.0		±94.0	
基準尺寸		±10.0		±20.0		±26.0		±33.0		±41.0		±66.0		±96.0	
基準尺寸		±10.5		±21.0		±27.0		±34.0		±42.0		±68.0		±98.0	
基準尺寸		±11.0		±22.0		±28.0		±35.0		±43.0		±69.0		±99.0	
基準尺寸		±11.5		±23.0		±29.0		±36.0		±44.0		±70.0		±100.0	
基準尺寸		±12.0		±24.0		±30.0		±37.0		±45.0		±71.0		±101.0	
基準尺寸		±12.5		±25.0		±31.0		±38.0		±46.0		±72.0		±102.0	
基準尺寸		±13.0		±26.0		±32.0		±39.0		±47.0		±73.0		±103.0	
基準尺寸		±13.5		±27.0		±33.0		±40.0		±48.0		±74.0		±104.0	
基準尺寸		±14.0		±28.0		±34.0		±41.0		±49.0		±75.0		±105.0	
基準尺寸		±14.5		±29.0		±35.0		±42.0		±50.0		±76.0		±106.0	
基準尺寸		±15.0		±30.0		±36.0		±43.0		±51.0		±77.0		±107.0	
基準尺寸		±15.5		±31.0		±37.0		±44.0		±52.0		±78.0		±108.0	
基準尺寸		±16.0		±32.0		±38.0		±45.0		±53.0		±79.0		±109.0	
基準尺寸		±16.5		±33.0		±39.0		±46.0		±54.0		±80.0		±110.0	
基準尺寸		±17.0		±34.0		±40.0		±47.0		±55.0		±81.0		±111.0	
基準尺寸		±17.5		±35.0		±41.0		±48.0		±56.0		±82.0		±112.0	
基準尺寸		±18.0		±36.0		±42.0		±49.0		±57.0		±83.0		±113.0	
基準尺寸		±18.5		±37.0		±43.0		±50.0		±58.0		±84.0		±114.0	
基準尺寸		±19.0		±38.0		±44.0		±51.0		±59.0		±85.0		±115.0	
基準尺寸		±19.5		±39.0		±45.0		±52.0		±60.0		±86.0		±116.0	
基準尺寸		±20.0		±40.0		±46.0		±53.0		±61.0		±87.0		±117.0	
基準尺寸		±20.5		±41.0		±47.0		±54.0		±62.0		±88.0		±118.0	
基準尺寸		±21.0		±42.0		±48.0		±55.0		±63.0		±89.0		±119.0	
基準尺寸		±21.5		±43.0		±49.0		±56.0		±64.0		±90.0		±120.0	
基準尺寸		±22.0		±44.0		±50.0		±57.0		±65.0		±91.0		±121.0	
基準尺寸		±22.5		±45.0		±51.0		±58.0		±66.0		±92.0		±122.0	
基準尺寸		±23.0		±46.0		±52.0		±59.0		±67.0		±93.0		±123.0	
基準尺寸		±23.5		±47.0		±53.0		±60.0		±68.0		±94.0		±124.0	
基準尺寸		±24.0		±48.0		±54.0		±61.0		±69.0		±95.0		±125.0	
基準尺寸		±24.5		±49.0		±55.0		±62.0		±70.0		±96.0		±126.0	
基準尺寸		±25.0		±50.0		±56.0									



80001505 OX-188BT安全钳联动机构 (C=192 L3=200) DBG=1680(附图) 中英文 伊萨电梯

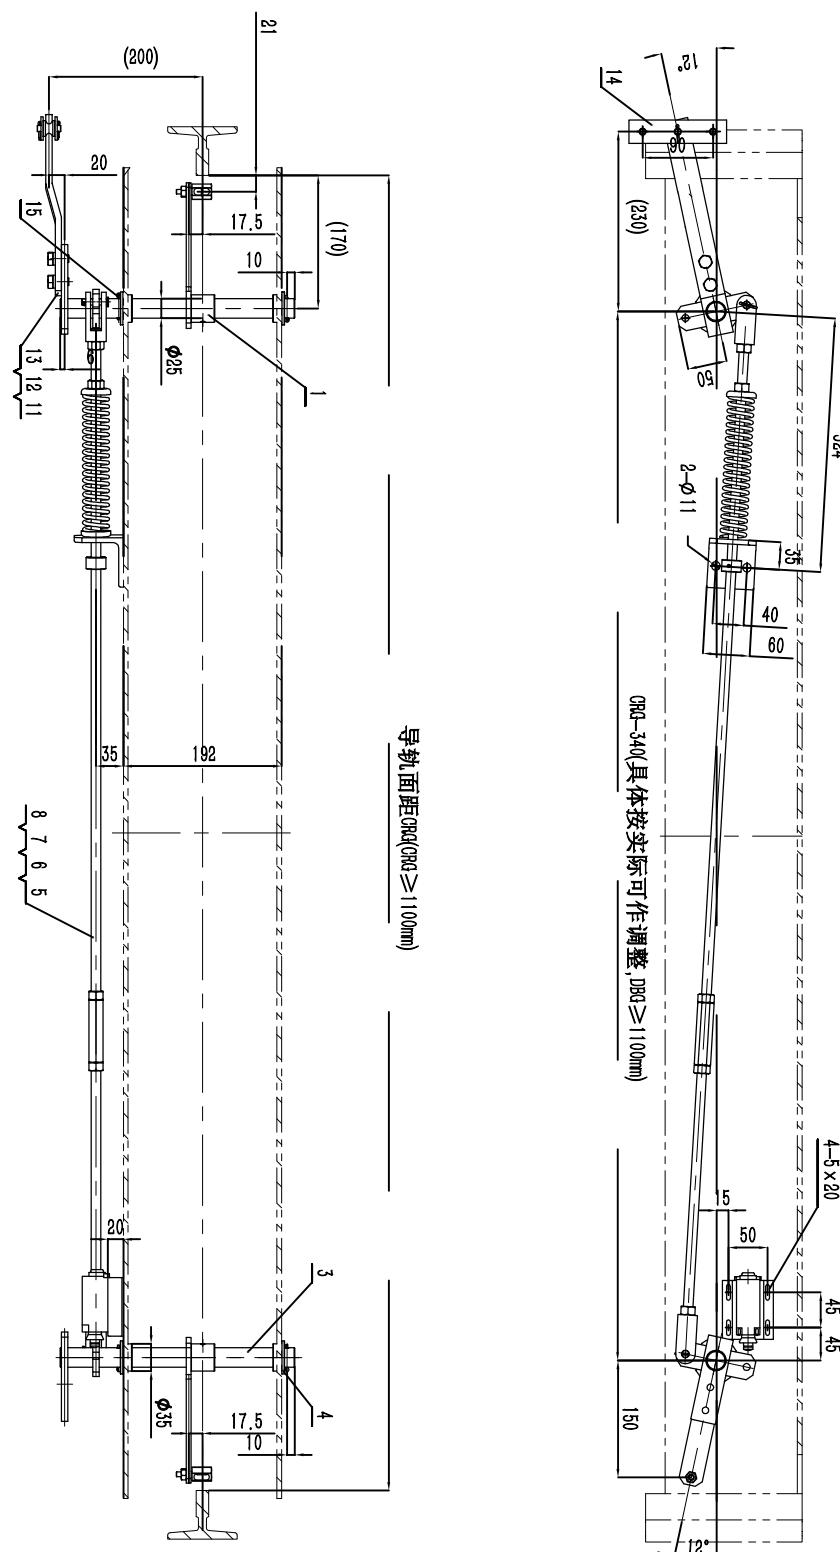

技术要求：

1. CRG为轿厢导轨距；
2. 提拉机构中含UKS开关及紧固件