


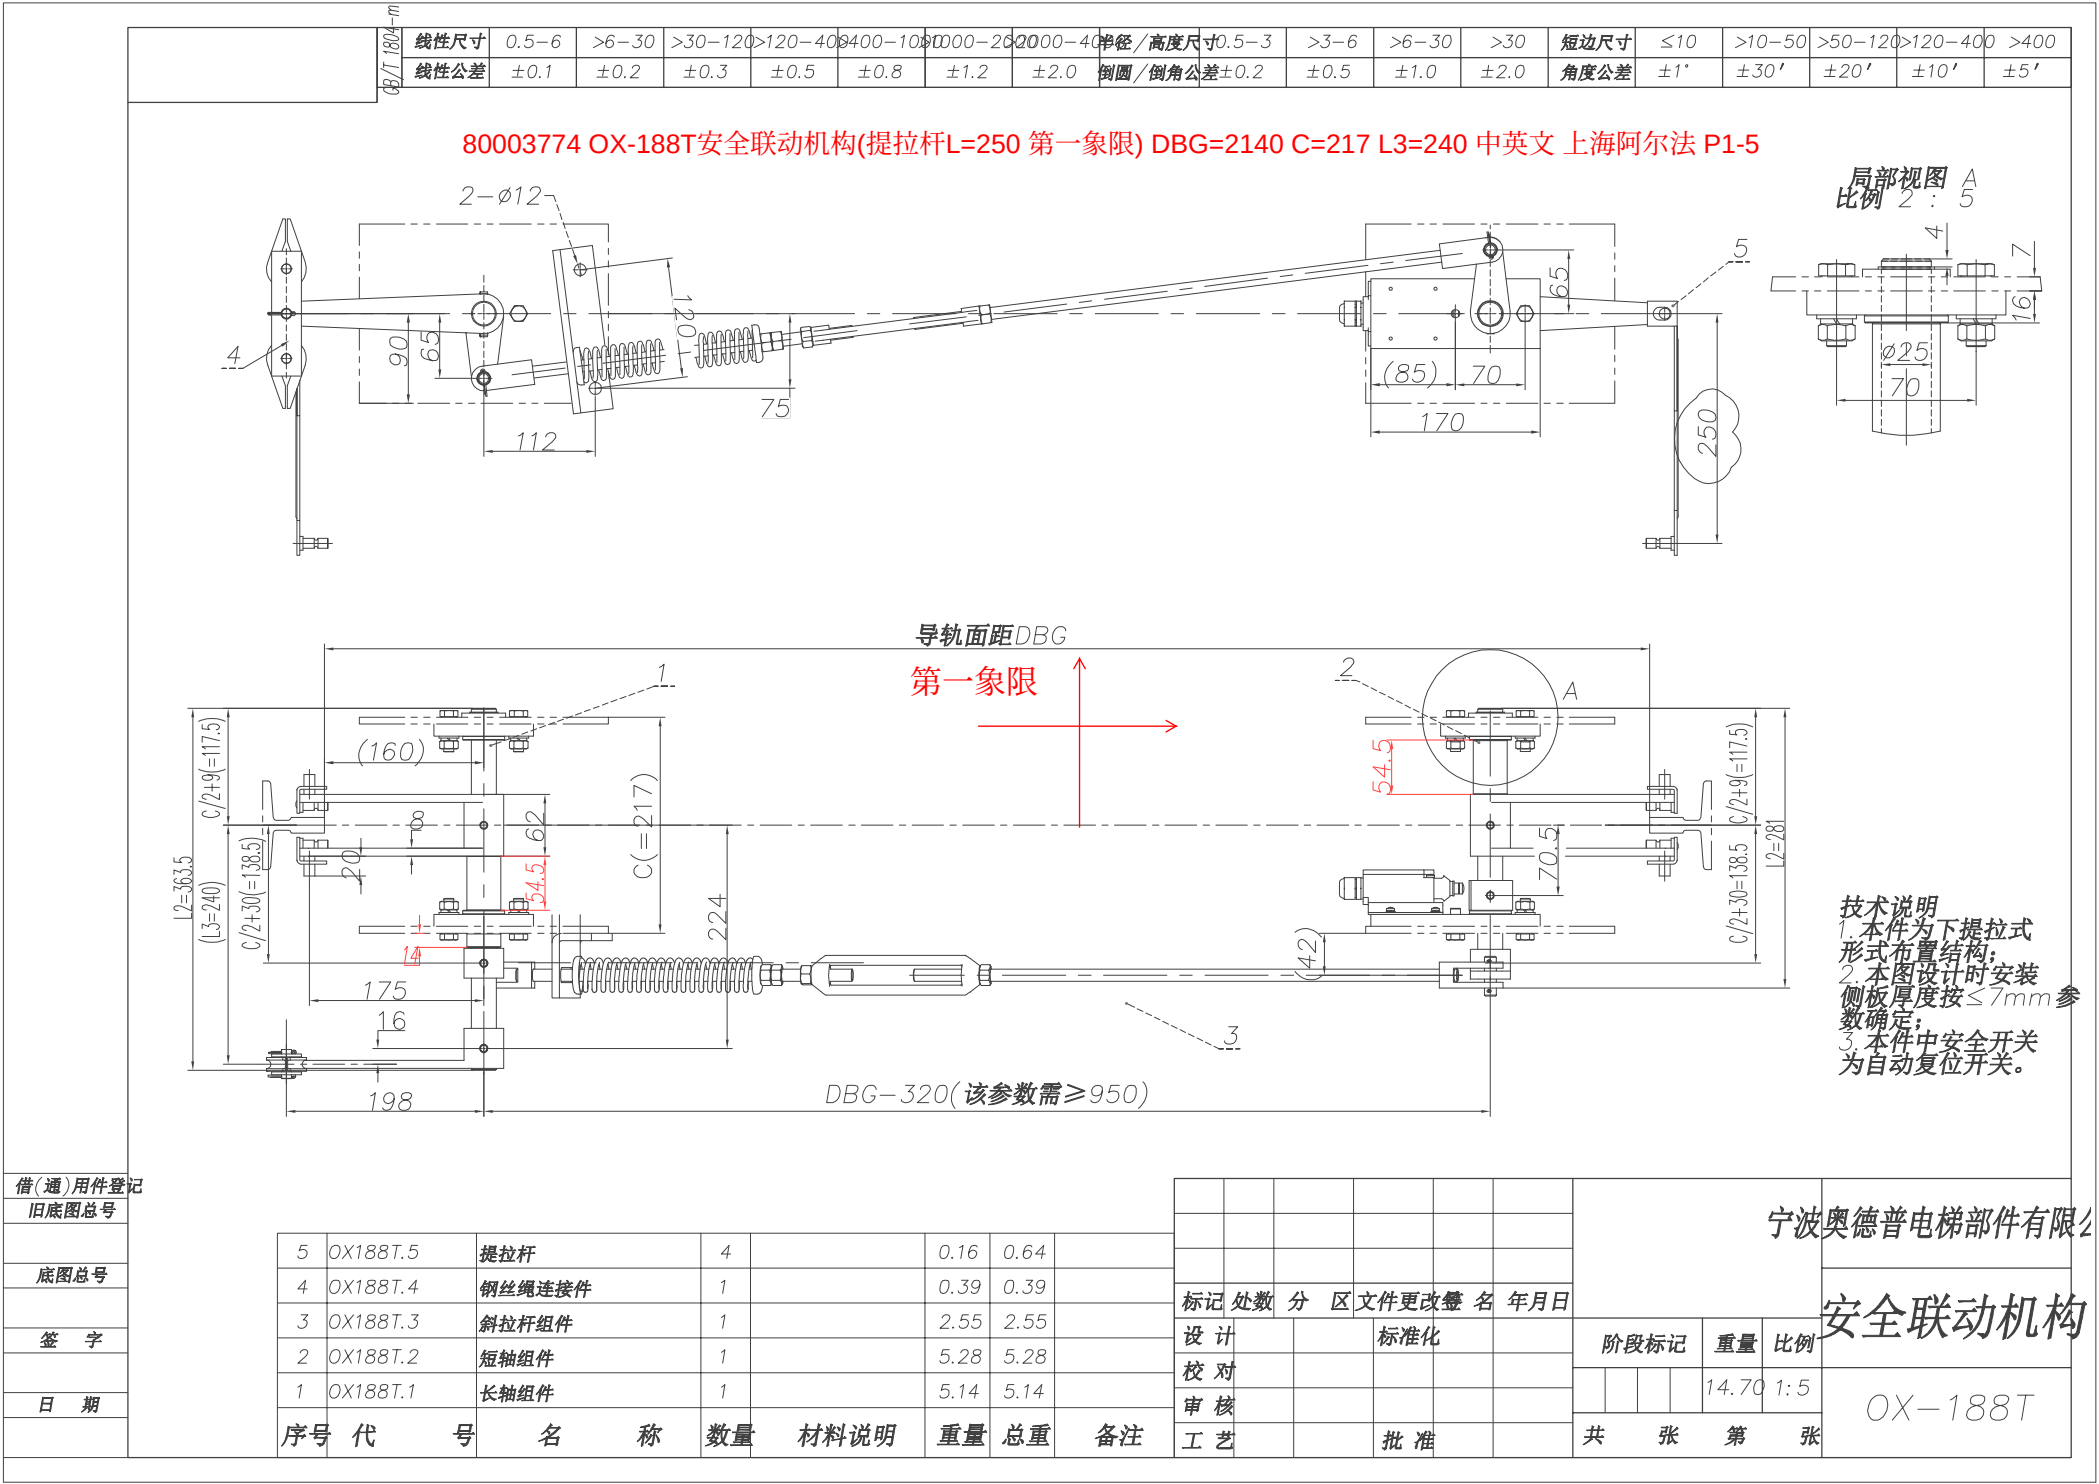

借(通)用件登记										宁波奥德普电梯部件有限公司				
旧底图总号										安全联动机构				
底图总号		5	OX188T.5	提拉杆	4		0.16	0.64						
		4	OX188T.4	钢丝绳连接件	1		0.39	0.39						
签 字		3	OX188T.3	斜拉杆组件	1		2.55	2.55						
		2	OX188T.2	短轴组件	1		5.28	5.28						
日 期		1	OX188T.1	长轴组件	1		5.14	5.14						
		序号 代 号		名 称		数量	材料说明		重量	总重	备注	OX-188T		

线性尺寸	0~6	6~30	30~120	120~400	400~1000	1000~2000	2000~4000	半径/高度尺寸	<3	>3~6	>6~30	>30	短边尺寸	≤10	>10~50	>50~120	>120~400	>400
线性公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	倒圆/倒角公差	±0.2	±0.5	±1.0	±2.0	角度公差	±1°	±30′	±20′	±10′	±5′

80003774 OX-188T安全联动机构(提拉杆L=250 第一象限) DBG=2140 C=217 L3=240 中英文 上海阿尔法 P2

技术说明


1. 边角去毛刺, 未注明倒角为 $0.5 \sim 1 \times 45^\circ$;
2. 表面镀锌处理;
3. 完成后摆放注意弯曲变形及表面挤压不平等缺陷;
4. 图中各参数根据指令确定, 注轴杆上的销孔根据指令确定。

GB/T 1804-

80003774 OX-188T安全联动机构(提拉杆L=250 第一象限) DBG=2140 C=217 L3=240 中英文 上海阿尔法 P3

Technical drawing of a mechanical part, likely a shaft or tube, showing dimensions and features. The drawing includes a central horizontal axis with three circular features (holes or mounting points) spaced along it. Key dimensions and features are labeled:

- Overall Length:** 281
- Distance from Left End to First Hole:** 117.5
- Distance Between First and Second Hole:** 70.5
- Distance Between Second and Third Hole:** 138.5
- Left End Features:** A vertical dimension of 4 is shown on the left. A small vertical feature on the far left has a width of 1.1.
- Right End Feature:** A circular feature on the right end has a diameter of $\varnothing 25$.
- Surface Finish:** A surface finish symbol (a triangle with a checkmark) is located above the second hole, with a value of 6.3.
- Other Labels:** The text "3-08" is written near the first hole, and "6.3" is written near the surface finish symbol.

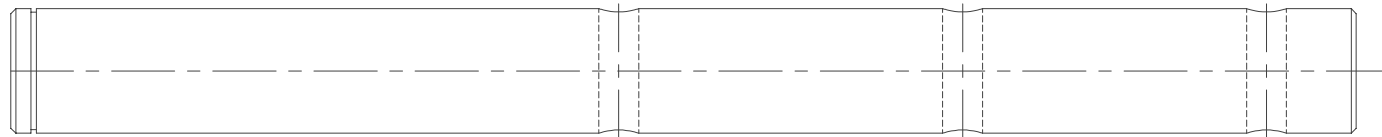

1. 边角去毛刺, 未注明倒角为 $0.5 \sim 1 \times 45^\circ$;
2. 表面镀锌处理;
3. 完成后摆放注意弯曲变形及表面挤压不平等缺陷;
4. 图中各参数根据指令确定, 注轴杆上的销孔根据指令确定。

						Q235A	宁波奥德普电梯部件有限公司		
标记 处数 分 区 文件更改 签 名 年月日									短轴杆
设 计				标 准 化		阶段标记	重 量	比 例	
校 对									0X188T.2-1
审 核							1.25	1:1	
工 艺				批 准		版本:			

