


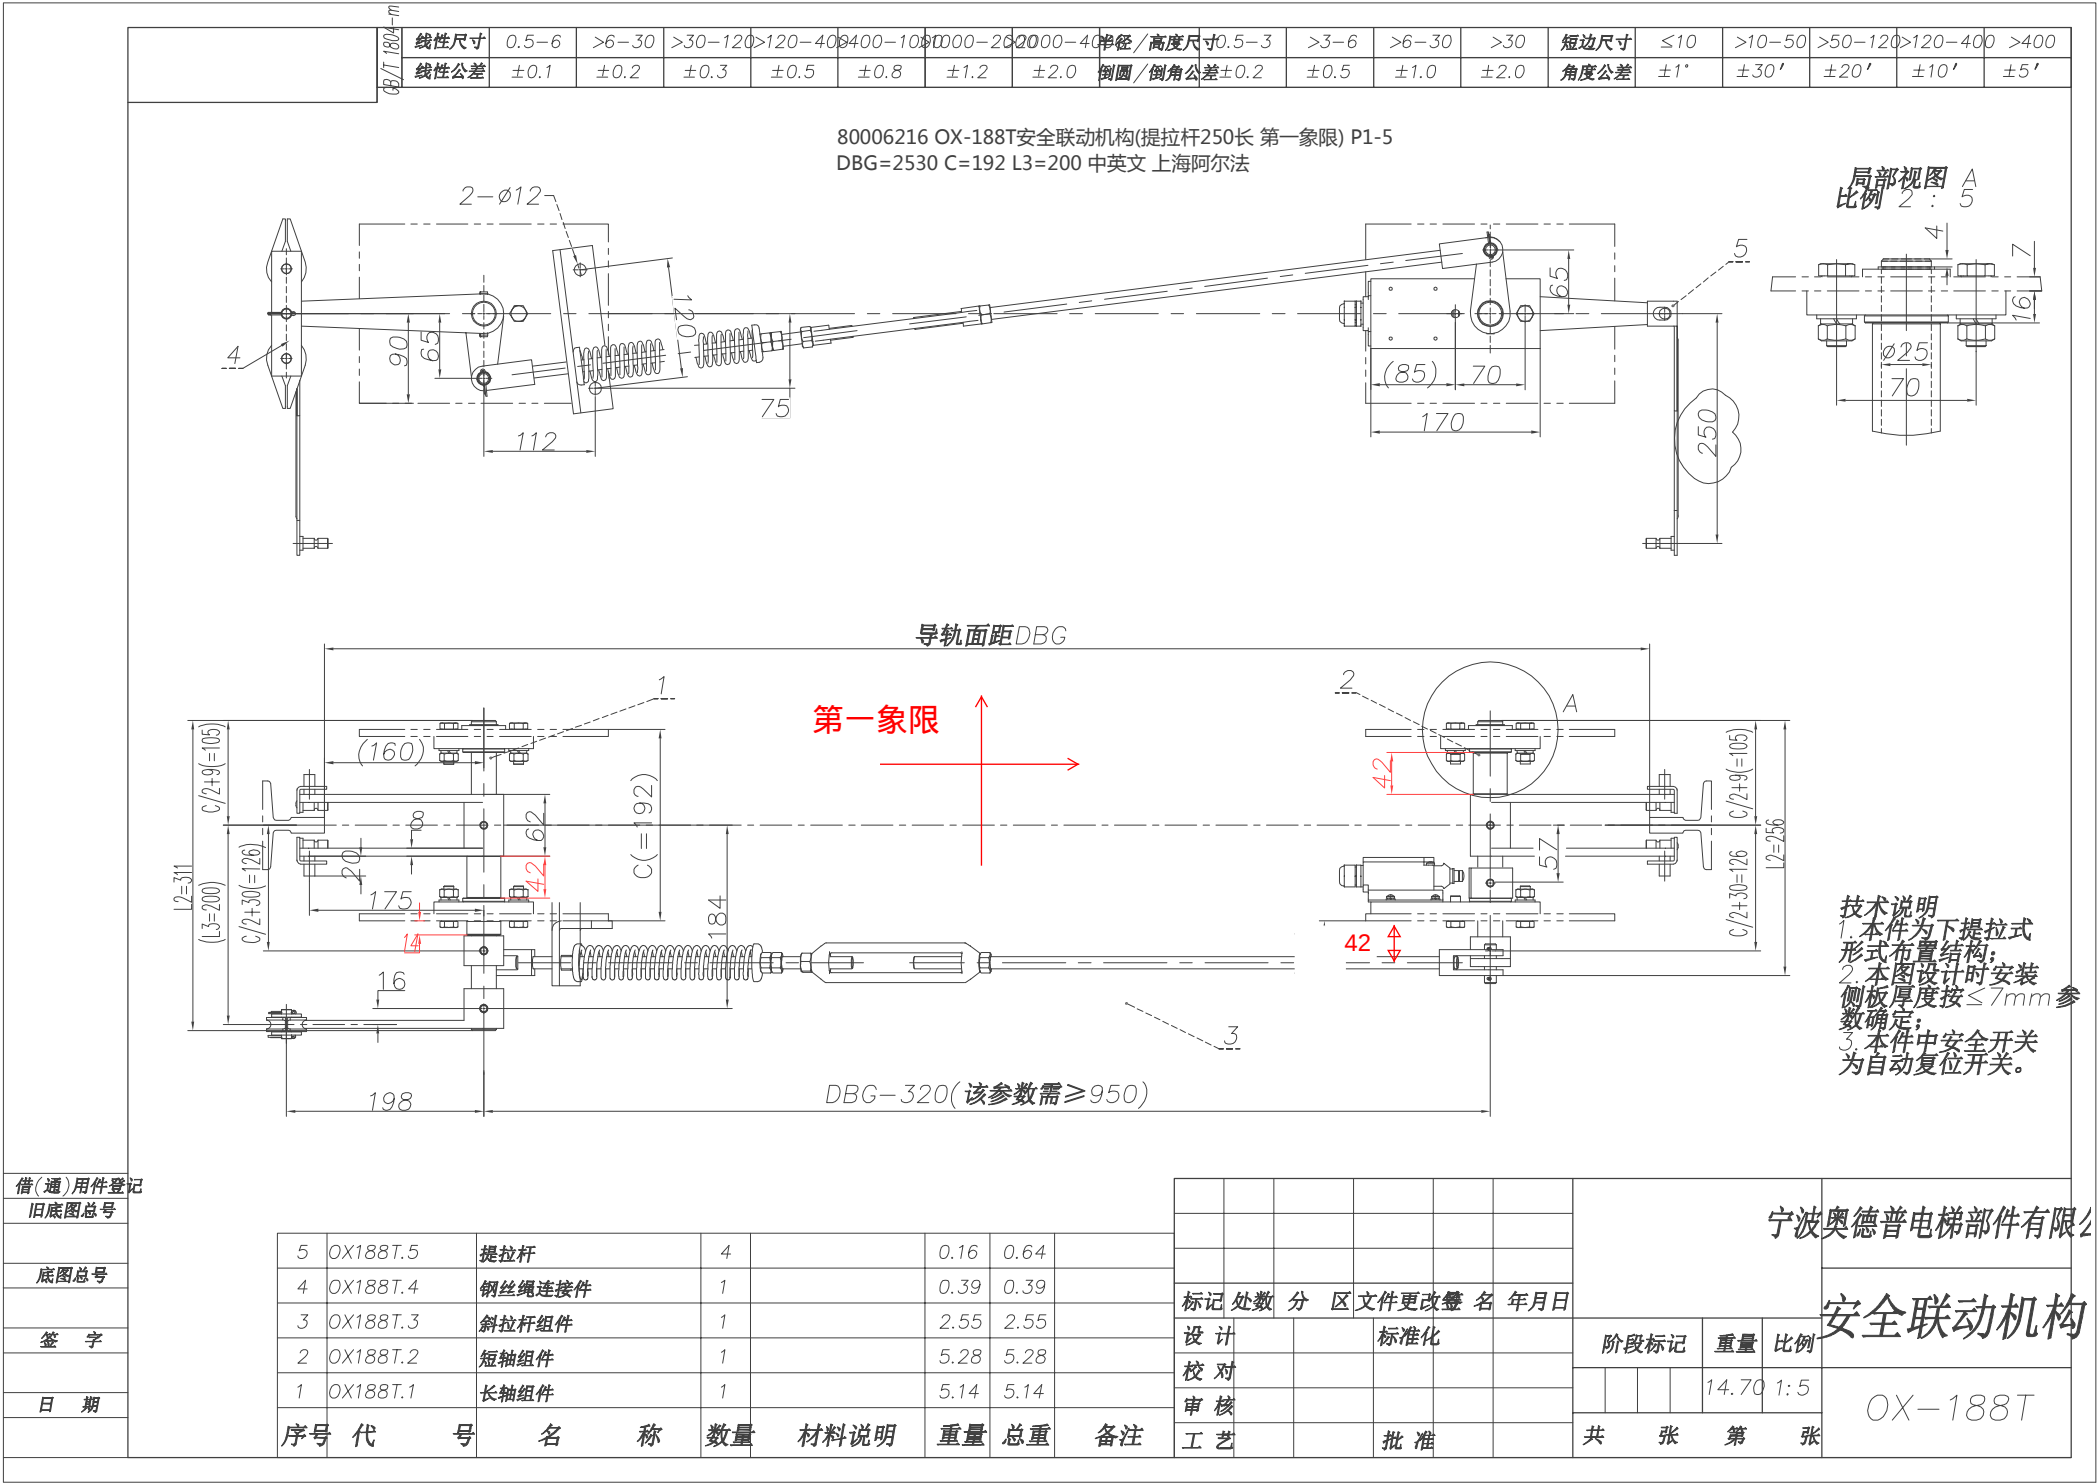

借(通)用件登记										宁波奥德普电梯部件有限公司			
旧底图总号													
										安全联动机构			
底图总号													
										OX-188T			
签 字													
日 期										共 张 第 张			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			
										OX-188T			

OX188T.1-4

Technical drawing of a mechanical part, showing two views: a front view (top) and a side view (bottom).

Front View (Top):

- Overall length: 311
- Left flange thickness: 1.1
- Central hole diameter: 4
- Main body diameter: 126
- Right flange thickness: 184

Side View (Bottom):

- Surface finish: 6.3
- Three holes with diameter 8, indicated by the symbol 3-∅8.
- Overall diameter: ∅25

1. 边角去毛刺, 未注明倒角为 $0.5 \sim 1 \times 45^\circ$;
2. 表面镀锌处理;
3. 完成后摆放注意弯曲变形及表面挤压不平等缺陷;
4. 图中各参数根据指令确定, 注轴杆上的销孔根据指令确定。

								Q235A	宁波奥德普电梯部件有限公司			
标记		处数	分	区	文件更改	量	名		年月日	长轴杆		
设计					标准化				阶段标记			
校对										1.46	4:5	0X188T.1-4
审核												
工艺					批准				版本:			

簽 字


日期

GB/T 1804-

80006216 OX-188T安全联动机构(提拉杆L=250 第一象限) DBG=2530 C=192 L3=200 中英文 上海阿尔法 P3

Technical drawing of a mechanical part, likely a shaft or tube, showing dimensions and features:

- Overall length: 256
- Overall diameter: $\phi 25$
- Left end features: A small step with a width of 1.1 and a height of 4.
- Surface finish: A symbol indicating a surface finish of 6.3.
- Internal features: Three circular features, each with a diameter of $\phi 8$, spaced along the length.
- Dimensions between features: The distance between the first and second circular features is 105. The distance between the second and third circular features is 57. The distance from the right end to the third circular feature is 126.



1. 边角去毛刺, 未注明倒角为 $0.5 \sim 1 \times 45^\circ$;
2. 表面镀锌处理;
3. 完成后摆放注意弯曲变形及表面挤压不平等缺陷;
4. 图中各参数根据指令确定, 注轴杆上的销孔根据指令确定。

						Q235A	宁波奥德普电梯部件有限公司		
							短轴杆		
标记	处数	分	区	文件更改	登 名				
设 计				标准化		阶段标记	重量	比例	0X188T.2-1
校 对									
审 核							1.25	1:1	
工 艺				批 准		版本:			



9-11881-X0

GB/T 1804-

线性尺寸	0~6	6~30	30~120	120~400	400~1000	1000~2000	2000~4000	半径/高度尺寸	≤3	>3~6	>6~30	>30	短边尺寸	≤10	>10~50	>50~120	>120~400	>400
线性公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	倒圆/倒角公差	±0.2	±0.5	±1.0	±2.0	角度公差	±1′	±30′	±20′	±10′	±5′

80006216 OX-188T安全联动机构(提拉杆L=250 第一象限) DBG=2530 C=192 L3=200 中英文 上海阿尔法 P4

6.3/

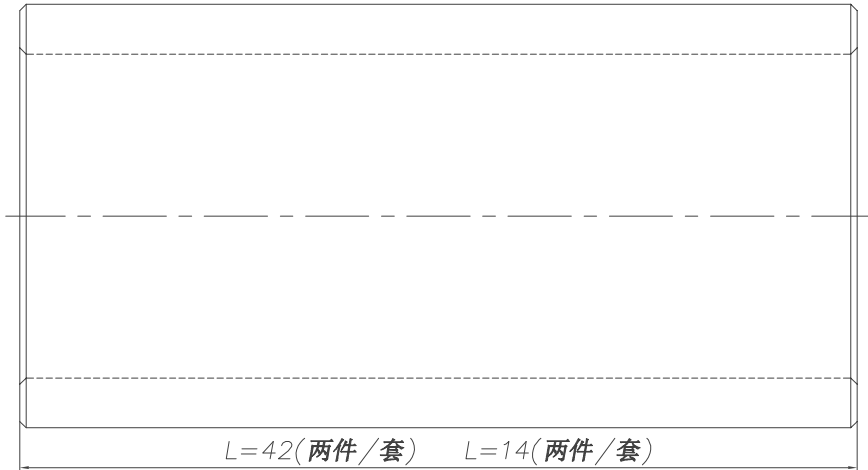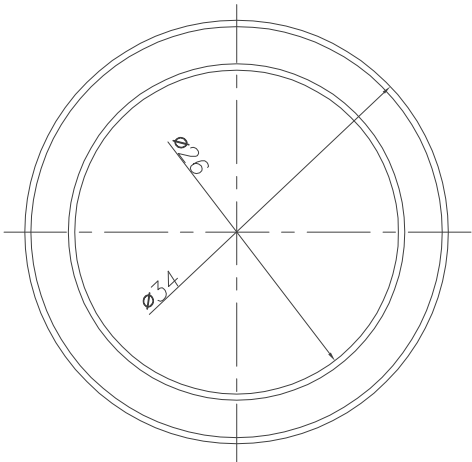

技术说明

1. 边角去毛刺，未注明倒角为0.5~1.0×45°；
2. 图中衬套长度根据指令确定；
3. 表面镀锌处理。

借(通)用件登记
旧底图总号
底图总号


签 字

日 期

							20#			宁波奥德普电梯部件有限公司			
										衬套			
标记	处数	分 区	文件更改	整 名	年月日								
设 计			标准化				阶段标记	重量	比例	OX-188T.1-5			
校 对													
审 核									0.03				5:2
工 艺			批 准			版本:							

OX188T.10	线性尺寸	0~6	6~30	30~120	120~400	400~1000	1000~2000	2000~4000	半径/高度尺寸	0.5~3	>3~6	>6~30	>30	短边尺寸	≤10	>10~50	>50~120	>120~400	>400
	线性公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	倒圆/倒角公差	±0.2	±0.5	±1.0	±2.0	角度公差	±1°	±30′	±20′	±10′	±5′

80006216 OX-188T安全联动机构(提拉杆L=250 第一象限) DBG=2530 C=192 L3=200 中英文 上海阿尔法 P5

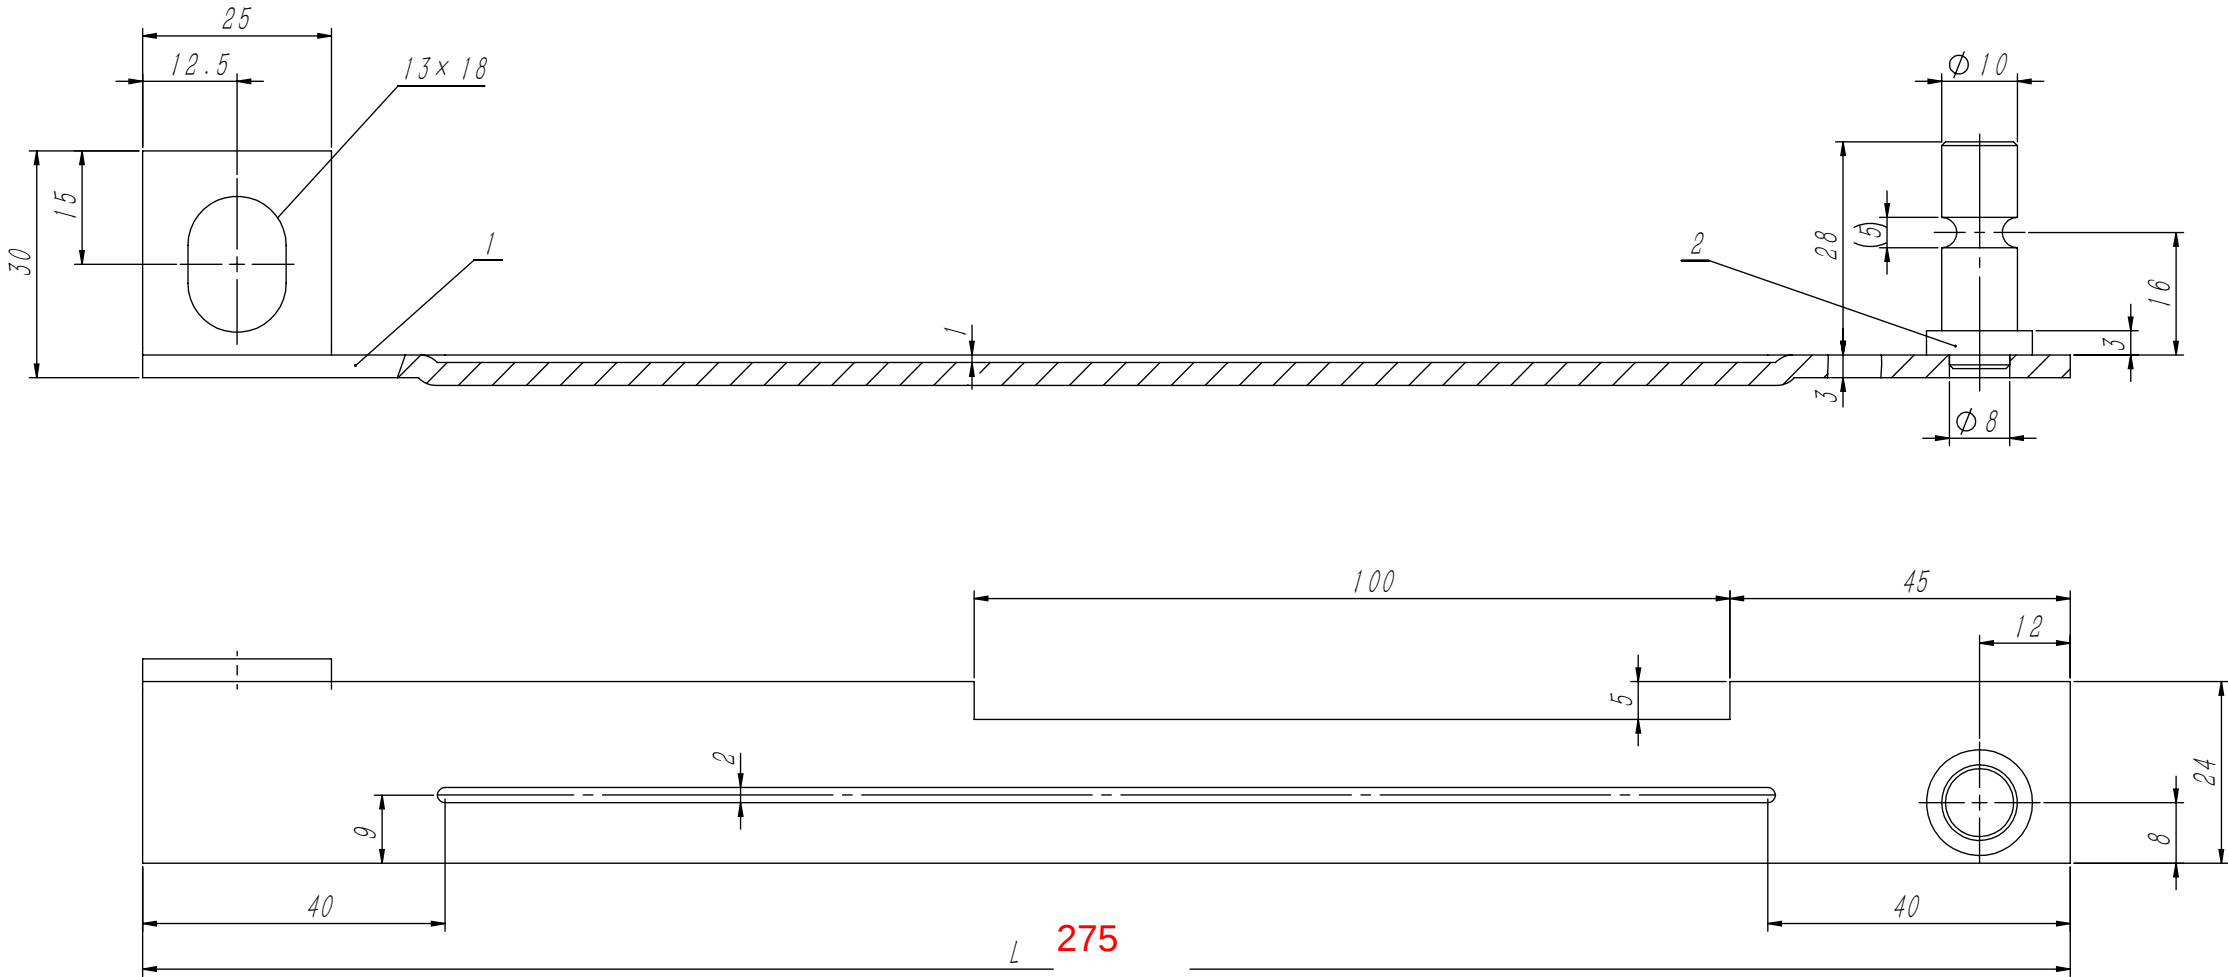

技术说明
1. 本件一套四件，左右对称各两件；
2. 件1、2采用电焊连接，表面镀锌处理。

2	OX188.12-3					连接销		1	35#		0.02	0.02	
1	OX188T.10-1					提拉板		1	Q235A/3.0		0.15	0.15	
序号		代 号			名 称			数量	材料说明		重量	总重	备注
											宁波奥德普电梯部件有限公司		
标记	处数	分 区		文件更改号	签 名	年月日					提拉杆		
设 计				标准化									
校 对													
审 核													
工 艺				批 准				版本:			OX188T.5		

借(通)用件登记
旧底图总号
底图总号
签字
日期