


OX-188T(BZ)

线性尺寸	0.5-6	>6-30	>30-120	>120-400	400-1000	1000-2000	2000-4000	半径/高度尺寸	0.5-3	>3-6	>6-30	>30	短边尺寸	≤10	>10-50	>50-120	>120-400	>400
线性公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	圆角/倒角公差	±0.2	±0.5	±1.0	±2.0	角度公差	±1°	±30′	±20′	±10′	±5′

80006732 OX-188T安全联动机构(右置) DBG=1560 C=225 L3=220 中英文 江苏菱智 P1-5

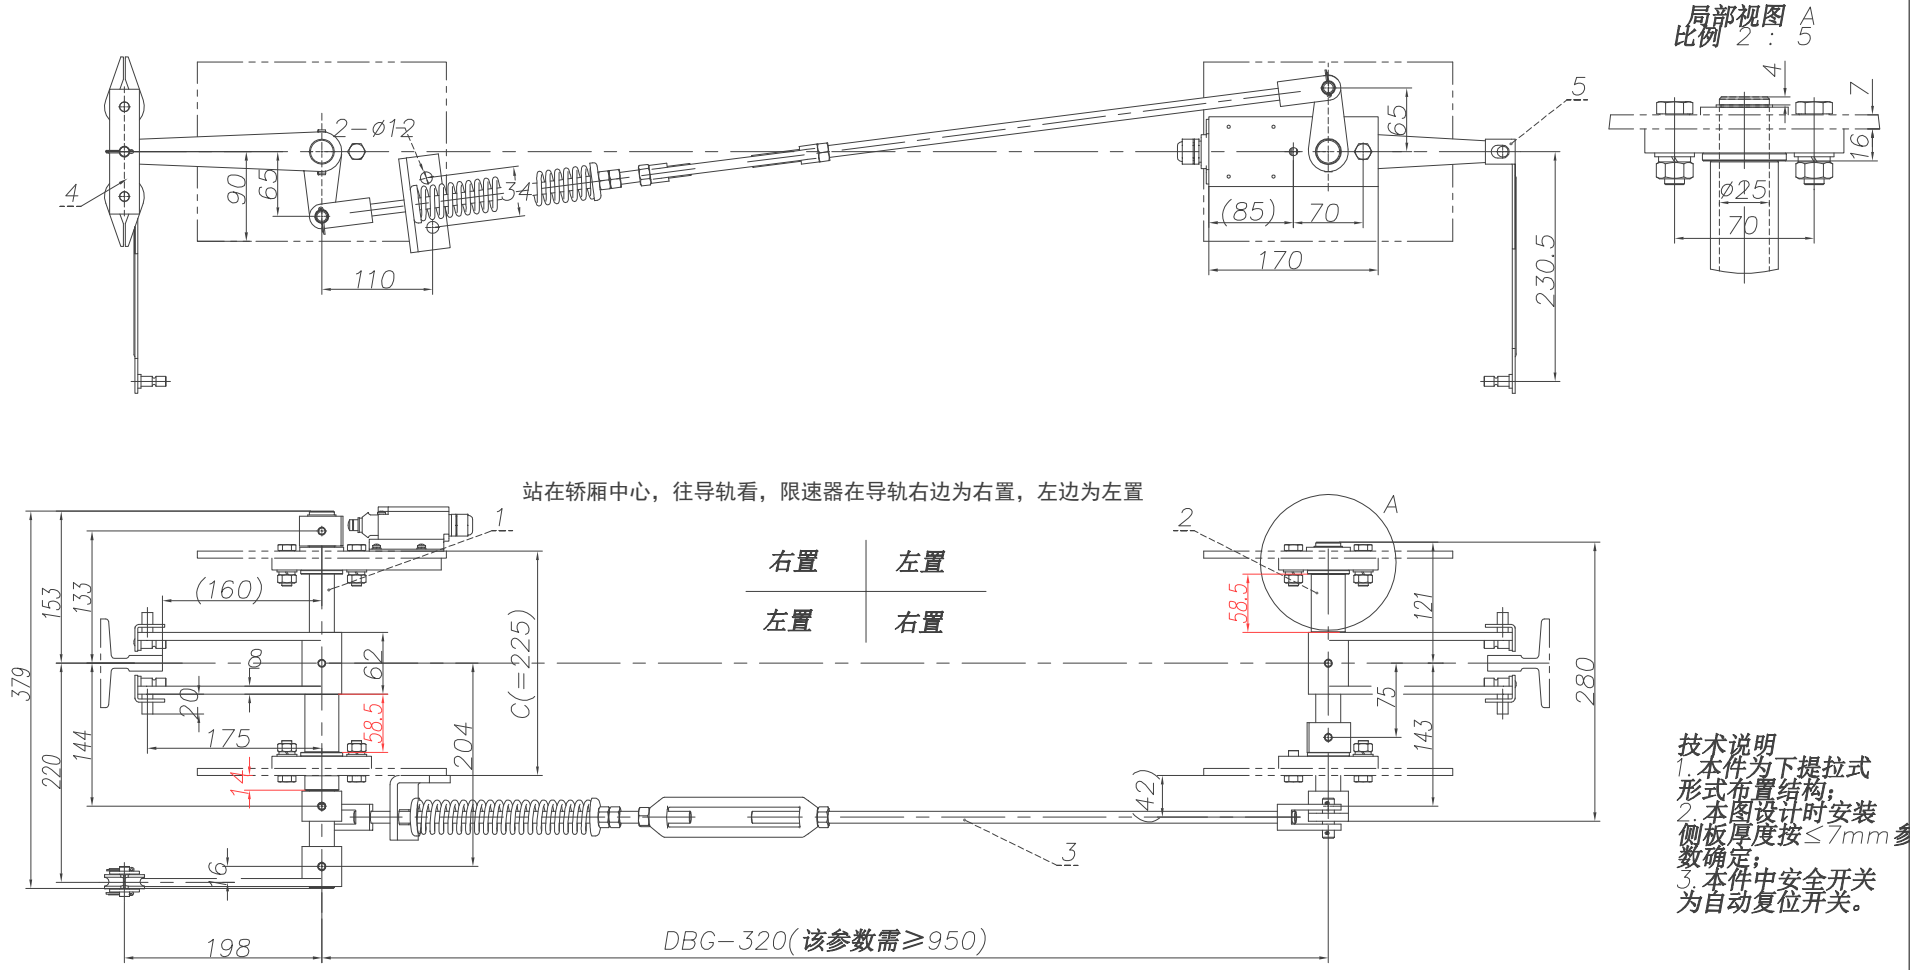


借(通)用件登记												宁波奥德普电梯部件有限公司							
旧底图总号												安全联动机构							
底图总号		5	OX188T.5	提拉杆	4		0.16	0.64											
		4	OX188T.4	钢丝绳连接件	1		0.39	0.39											
签 字		3	OX188T.3	斜拉杆组件	1		2.55	2.55											
		2	OX188T.2	短轴组件	1		5.28	5.28											
日 期		1	OX188T.1	长轴组件	1		5.14	5.14											
												OX-188T							

GB/T 1804-

线性尺寸	0~6	6~30	30~120	120~400	400~1000	1000~2000	2000~4000	半径/高度尺寸	<3	>3~6	>6~30	>30	短边尺寸	≤10	>10~50	>50~120	>120~400	>400
线性公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	倒圆/倒角公差	±0.2	±0.5	±1.0	±2.0	角度公差	±1'	±30'	±20'	±10'	±5'

80006732 0X-188T安全联动机构(右置) DBG=1560 C=225 L3=220 中英文 江苏菱智 P2

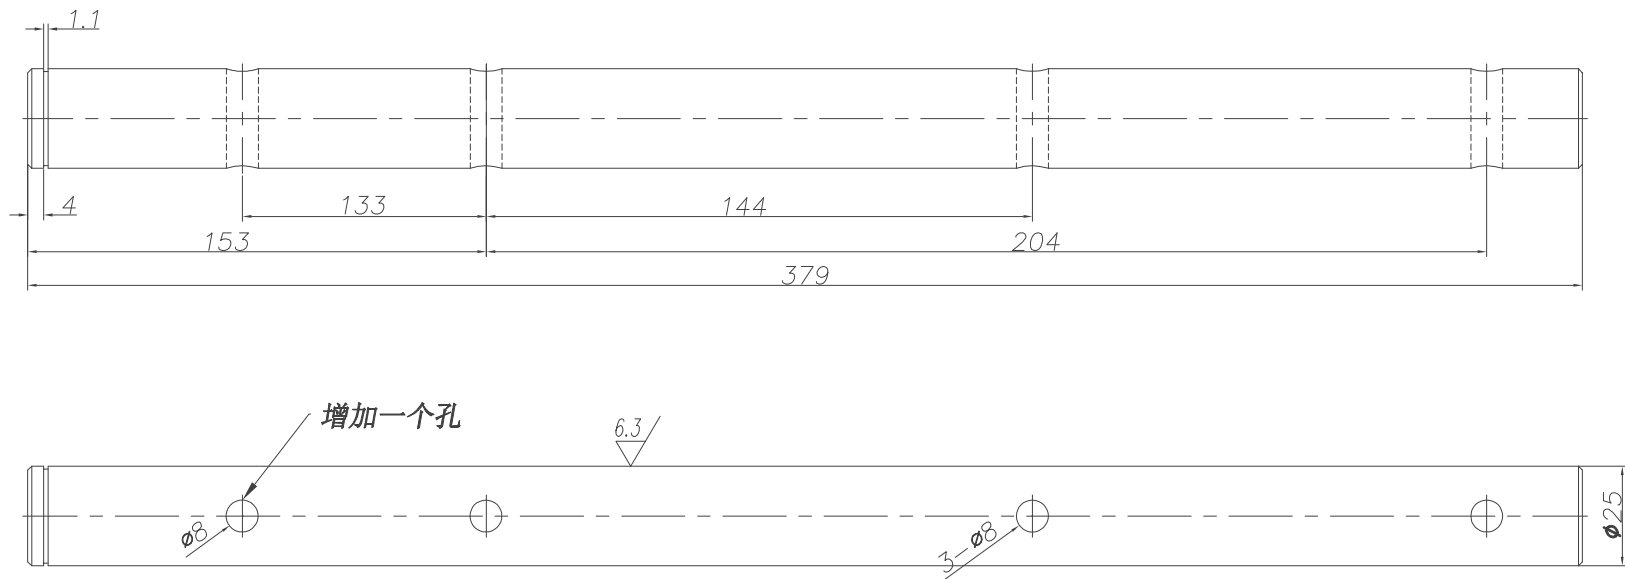

技术说明




1. 边角去毛刺, 未注明倒角为 $0.5 \sim 1 \times 45^\circ$;
2. 表面镀锌处理;
3. 完成后摆放注意弯曲变形及表面挤压不平等缺陷;
4. 图中各参数根据指令确定, 注轴杆上的销孔根据指令确定。

借(通)用件登记
旧底图总号
底图总号
签 字
日 期


						Q235A	宁波奥德普电梯部件有限公司			
标记 处数 分 区 文件更改 签署 名 年月日							长轴杆			
设计				标准化		阶段标记				重量
校对									1.46	4:5
审核						0X188T.1-4				
工艺				批准						

基本尺寸	0~6	6~30	30~120	120~400	400~1000	1000~2000	2000~4000
公差	0.1	0.2	0.3	0.5	0.8	1.2	2.0

80006732 OX-188T安全联动机构(右置) DBG=1560 C=225 L3=220 中英文 江苏菱智 P5

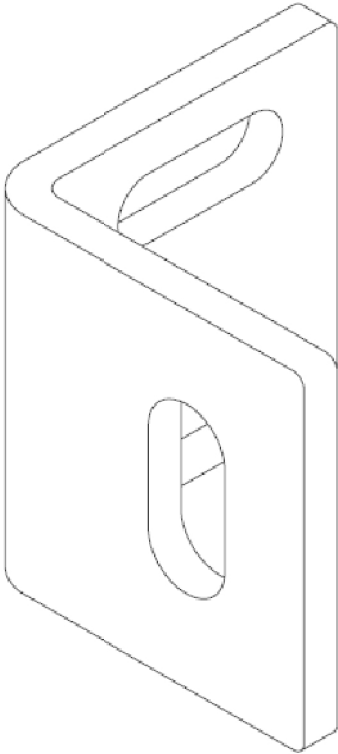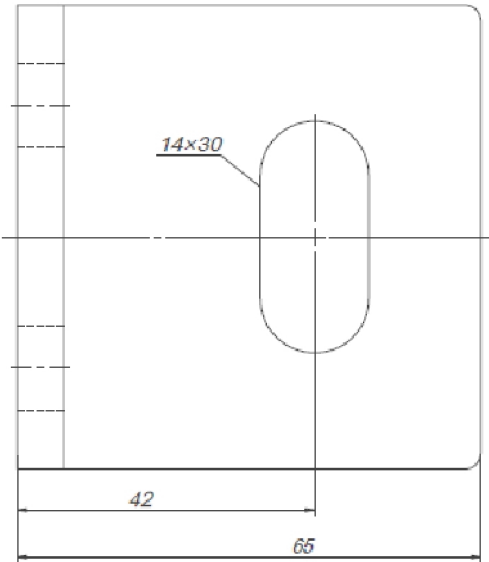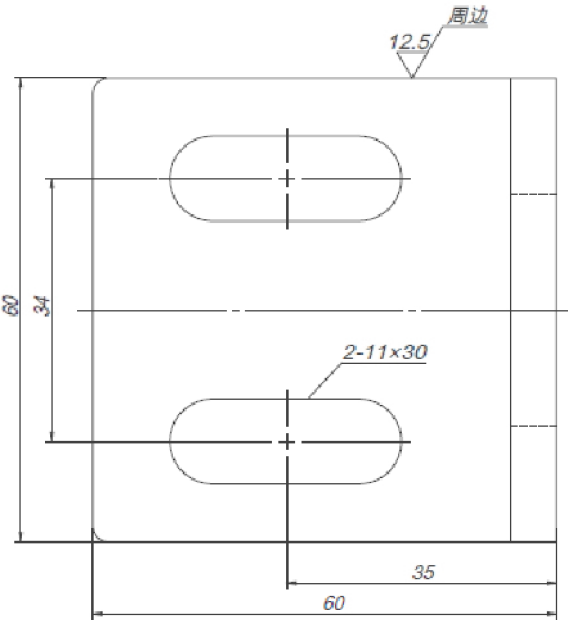

其余

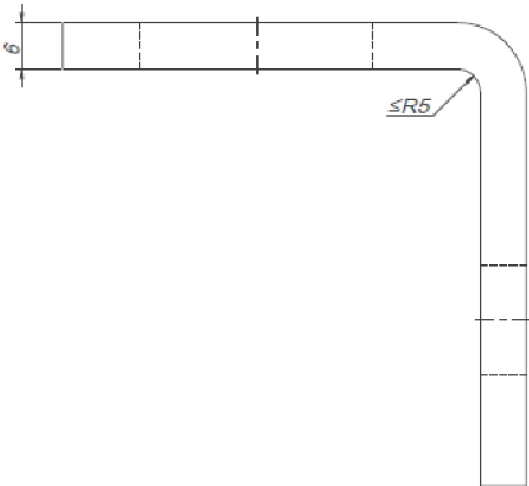

技术说明
1.边角去毛刺，锐角倒圆弧角R2处理；
2.表面镀锌处理；
3.折弯成型，无明显扭曲变形。

							Q235A/6.0			宁波奥德普电梯部件有限公司	
标记	处数	分区	文件更改号	签名	年、月、日					弹簧支架	
设计			标准化				阶段标记	重量	比例		
校对								0.03	3:2		
审核											
工艺			批准				共 1 张	第 1 张		OX188T.1-7(60)	