



GB/T 1804-2000	线性尺寸	0~6	6~30	30~120	120~400	400~1000	1000~2000	2000~4000	4000~10000	10000~40000	高度尺寸	0.5~3	>3~6	>6~30	>30	短边尺寸	≤10	>10~50	>50~120	>120~400	>400
	线性公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	±3.0	±5.0	倒圆/倒角公差	±0.2	±0.5	±1.0	±2.0	角度公差	±1°	±30′	±20′	±10′	±5′

配重状态	配重材料	J	E	F	G	识别号
18kg	铜块	260	55	250	25	1101
30kg		250	70	275	35	1102
18kg	重晶石	270	100	265	50	2101
30kg		300	140	305	70	2102

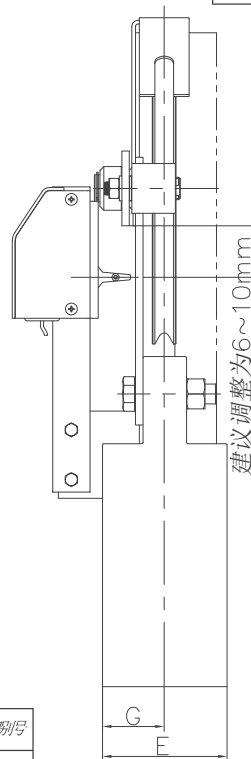

颜色	识别号
RL5015蓝色	I01
RL6005本色	I02
RL7037灰色	I03

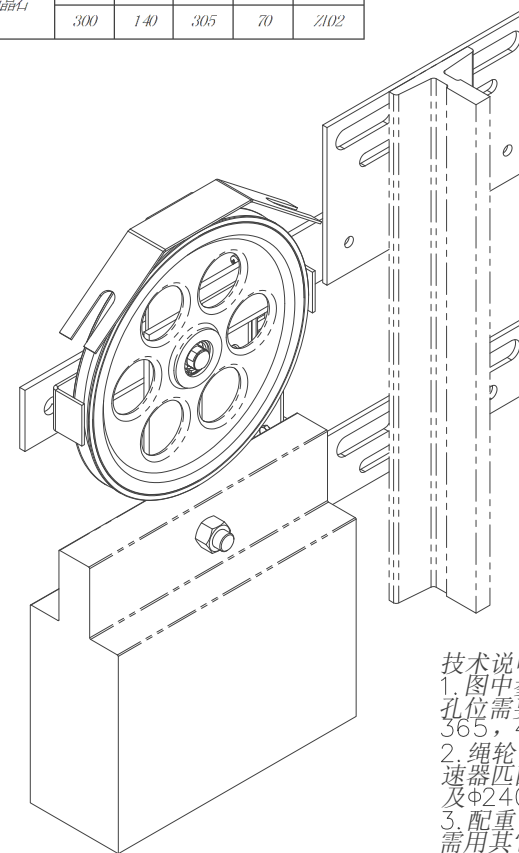

技术说明

1. 图中参数A 可根据摇杆孔位需要选择290, 350, 365, 405, 420;
2. 绳轮节圆直径可根据减速机匹配确定, 有 $\phi 200$ 及 $\phi 240$;
3. 配重常规为18kg 重, 需用其它需注明, 具体参见附表

[illegible]

普(通)用件登記

旧底图总号

底图总号

签字

日期

Technical drawing of a mechanical part, likely a shaft or pipe, showing dimensions and features.

Dimensions:

- Overall length: 480
- Overall diameter: 60
- Left circular feature: $\varnothing 30^{+0.12}_0$
- Distance from left end to center of left circular feature: 30
- Distance from left end to center of right circular feature: 290
- Right circular feature: $5-\varnothing 16.2$
- Distance from center of right circular feature to center of first kidney-shaped feature: 74
- Distance between centers of first and second kidney-shaped features: 13.5
- Distance between centers of second and third kidney-shaped features: 56
- Distance from center of third kidney-shaped feature to right end: (30)
- Top chamfer: 12.5

Annotations:

- Top chamfer: 12.5
- Red box: 325
- Red arrow pointing to the left circular feature.
- Red arrow pointing to the right circular feature.
- Red arrow pointing to the first kidney-shaped feature.
- Red box: 增加一个孔 (Increase a hole)

Scale: 1:1

其余 

到角处理;
扭曲变形。

借(通)用件登记
旧底图总号
底图总号
签 字
日 期

						Q235A/6.0			宁波奥德普电梯部件有限公司	
									摇杆板件	
标记	处数	分 区	文件更改号	签 名	年、月、日					
设 计			标准化			阶段标记	重量	比例		
校 对										
审 核							1.27	1:2	0X300.2-1	
工 艺			批 准			共 1 张 第 1 张				