


基本尺寸	0~6	6~30	30~120	120~400	400~1000	1000~2000	2000~4000
公差	0.1	0.2	0.3	0.5	0.8	1.2	2.0

Technical drawing of the DBG-340 hydraulic bracket, showing a side view with dimensions. The drawing includes a main body with a hydraulic cylinder, a spring, and a bracket arm. Dimensions are given in millimeters. Key dimensions include: 325 (total length), 45 (cylinder diameter), 45 (cylinder length), 50 (cylinder mounting bracket height), 15 (cylinder mounting bracket width), 12° (bracket angle), 14 (bracket thickness), 06 (bracket mounting bracket height), 12° (bracket angle), 2-φ11 (two holes with diameter 11mm), 40 (cylinder mounting bracket width), 60 (cylinder mounting bracket width), 4-5 x 20 (four to five holes with diameter 20mm), and (150) (bracket length). The model number DBG-340 is indicated, with a note that the length can be adjusted based on actual requirements, and DBG ≥ 1100mm.

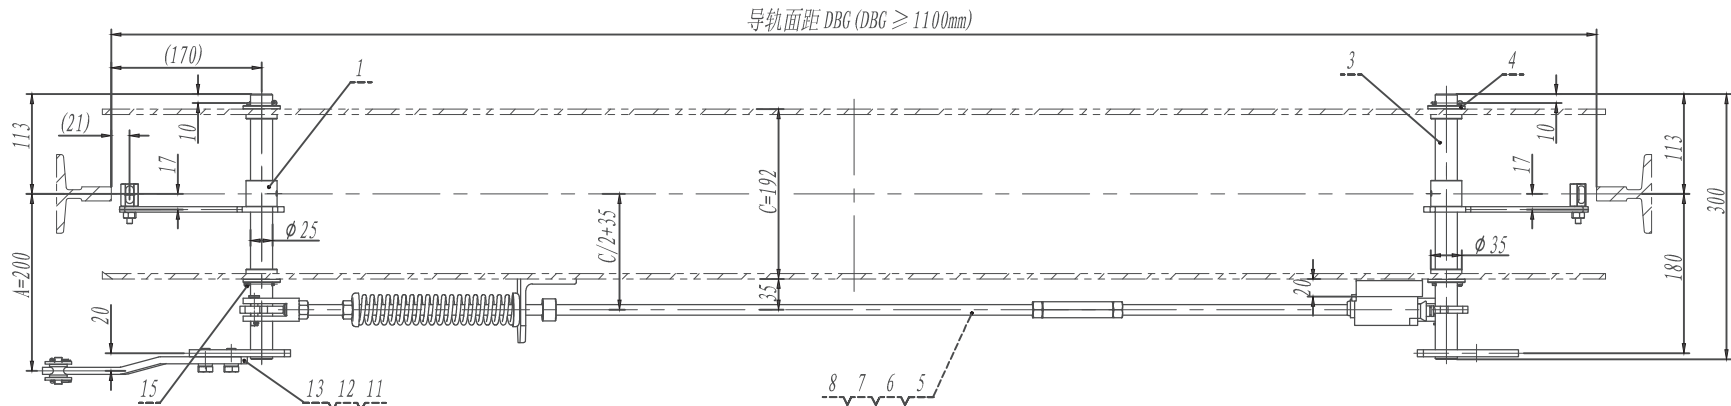

15	GB/T 91-2000	开口销3.2X25	4		1.74	6.96	
14	OX188T.5	钢丝绳连接件	1		0.03	0.03	
13	OX188BT-4	拉手杆	1	Q235A/8.0	0.44	0.44	
12	GB/T 93-1987	弹性垫圈10	2		2.16	4.32	
11	GB/T 5783-2000	螺栓M10×20	2		23.05	46.1	
10	UKS	行程开关	1		0.09	0.09	外购件
9		开关支架	1	Q235A/2.0	0.11	0.11	
8	GB/T 6170-2000	螺母M12	2		16.52	33.04	
7		左右旋螺母	1		0.12	0.12	
6	OX188BT.3	短拉杆组件	1		0.50	0.5	
序号	代 号	名 称	数量	材料说明	重量	总重	备注

5	OX188BT.2	长拉杆组件	1		1.64	1.64	
4	OX-188T.1.1-2	轴衬套	4	工程塑料	0.01	0.04	
3	OX188BT.1	联动组件	2		1.47	2.94	
1	OX188BT.4	提拉手焊件	2		0.41	0.82	
序号	代 号	名 称	数量	材料说明	重量	总重	备注
标记	处数	分 区	文件更改号	签 名	年、月、日		
设计			标准化				
校对							
审核							
工艺			批准				
			共 1 张	第 1 张			

## 单提拉联动机构

OX-188BT (C=192 A=200)

日期