


订单: 00102331

NBT

A4	长度/直径	0.5~6	>6~30	>30~120	>120~400	>400~1000	>1000~2000	>2000~4000
	公差	80007322 NKA001-1滚动导靴轮子 凯斯博						

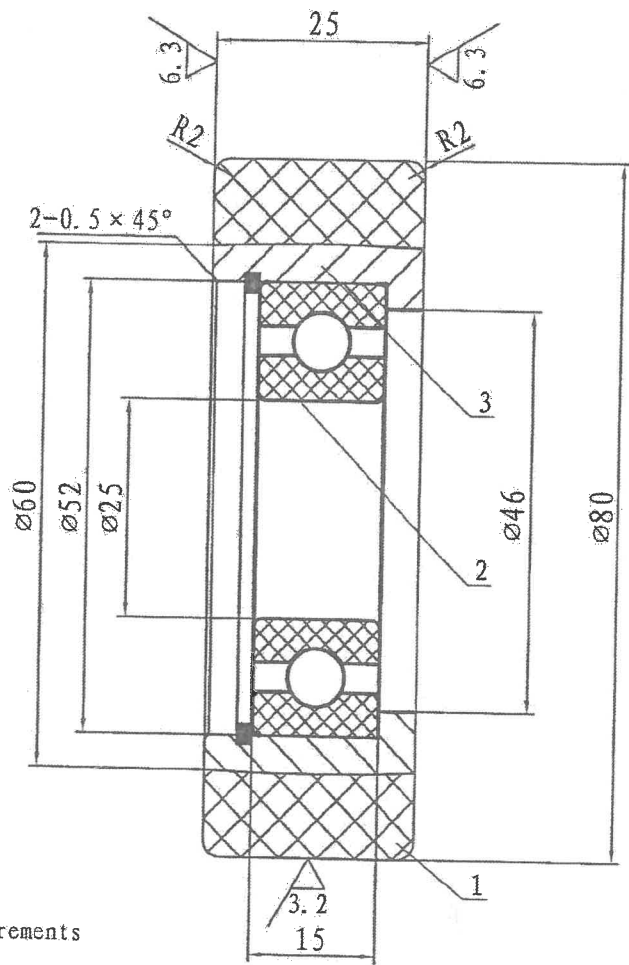

The technical requirements

1. Shore A 95±3;
2. Sampling fatigue test: test conditions are as follows:
Load F = 2000N, speed V = 0.5 m/s, after H = 250h continuous operation time, no cracks or breakage, and After 250h the rubber can't peel;
3. There is no air bubble, inclusion, surface defects such as trachoma, cracking,.

3	GB/T893.1-86		Check ring (52)	2	65Mn			
2	GB/T276-94		bearing6205-2RS	1	Standard Parts			
1	KDM3101401		Roller(aluminum)	1	Polyurethane rubber			
序号 No.	图号 Drawing Code	物料号 Parts No.	名称 Parts Name	数量 Num	材料 Material	单件 Single	总计 Total	备注 Remark

Part					 江苏凯斯博电梯有限公司 Jiangsu KSP-Kasper Elevator Co., Ltd.			
Mark 标记					Drawing Name Roller			
Num 处数					Part No.			
File Name 更改文件号					Drawing Code NKA001-1			
Sign 签字					Weight 重量			
Date 日期					Scale 比例			
设计 Designed by 孙成俊 20.4.17					Part No.			
校对 Checked by 李永 20.4.17					Drawing Mark 图样标记			
工艺 Technology by					Weight 重量			
审定 Approved by 李永 4.17					Scale 比例			
共 1 页 第 1 页					0.63 1:2.5			