


线性尺寸	0~6	6~30	30~120	120~400	400~1000	1000~2000	2000~4000	4000~10000	高度尺寸	0.5~3	>3~6	>6~30	>30	短边尺寸	≤10	>10~50	>50~120	>120~400	>400
线性公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	±3.0	倒圆/倒角公差	±0.2	±0.5	±1.0	±2.0	角度公差	±1°	±30′	±20′	±10′	±5′

匹配安全钳连接孔按
OX-188(A02)

Technical drawing of a mechanical assembly, likely a pump or motor component, showing a side view. The drawing includes dimensions: 180 (total height), 90 (height of the upper section), and 230 (height of the lower section). The assembly features a central vertical shaft, a horizontal shaft at the top, and a complex base with various components, including a circular element on the right side.

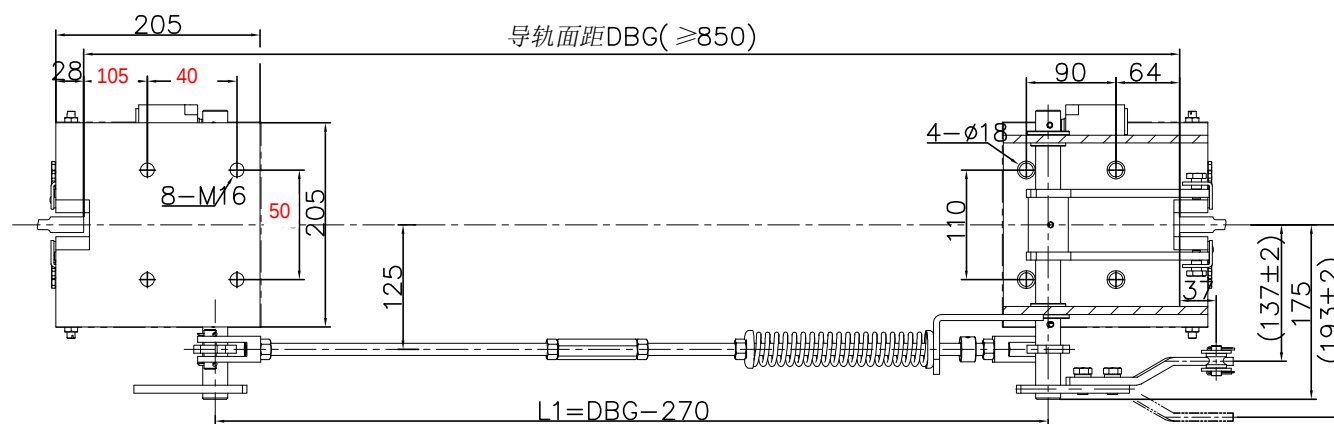

技术说明

1. 本装置按匹配OX-188(A02)安全钳要求确定, 选用时请注意匹配调整;
2. 本装置配装安全开关为T1R236-11Z(自动复位), 如需要配发手动复位开关时需注明;
3. 本装置需将标准提拉杆需更换为OX188T下提拉机构中的专用提拉杆, 配发该装置时注意提供;
4. 图中限速器提拉位置可根据实际调整, 本件可对称装配, 整体安装前需注意布置要求。

日期

							宁波奥德普电梯部件有限公司					
标记	处数	分	区	文件更改	签 名	年月日	安全联动装置 OX188DT					
设 计				标准化								
校 对												
审 核												
工 艺				批 准								
							阶段标记			重量	比例	
											1:5	
							物料编号:					