


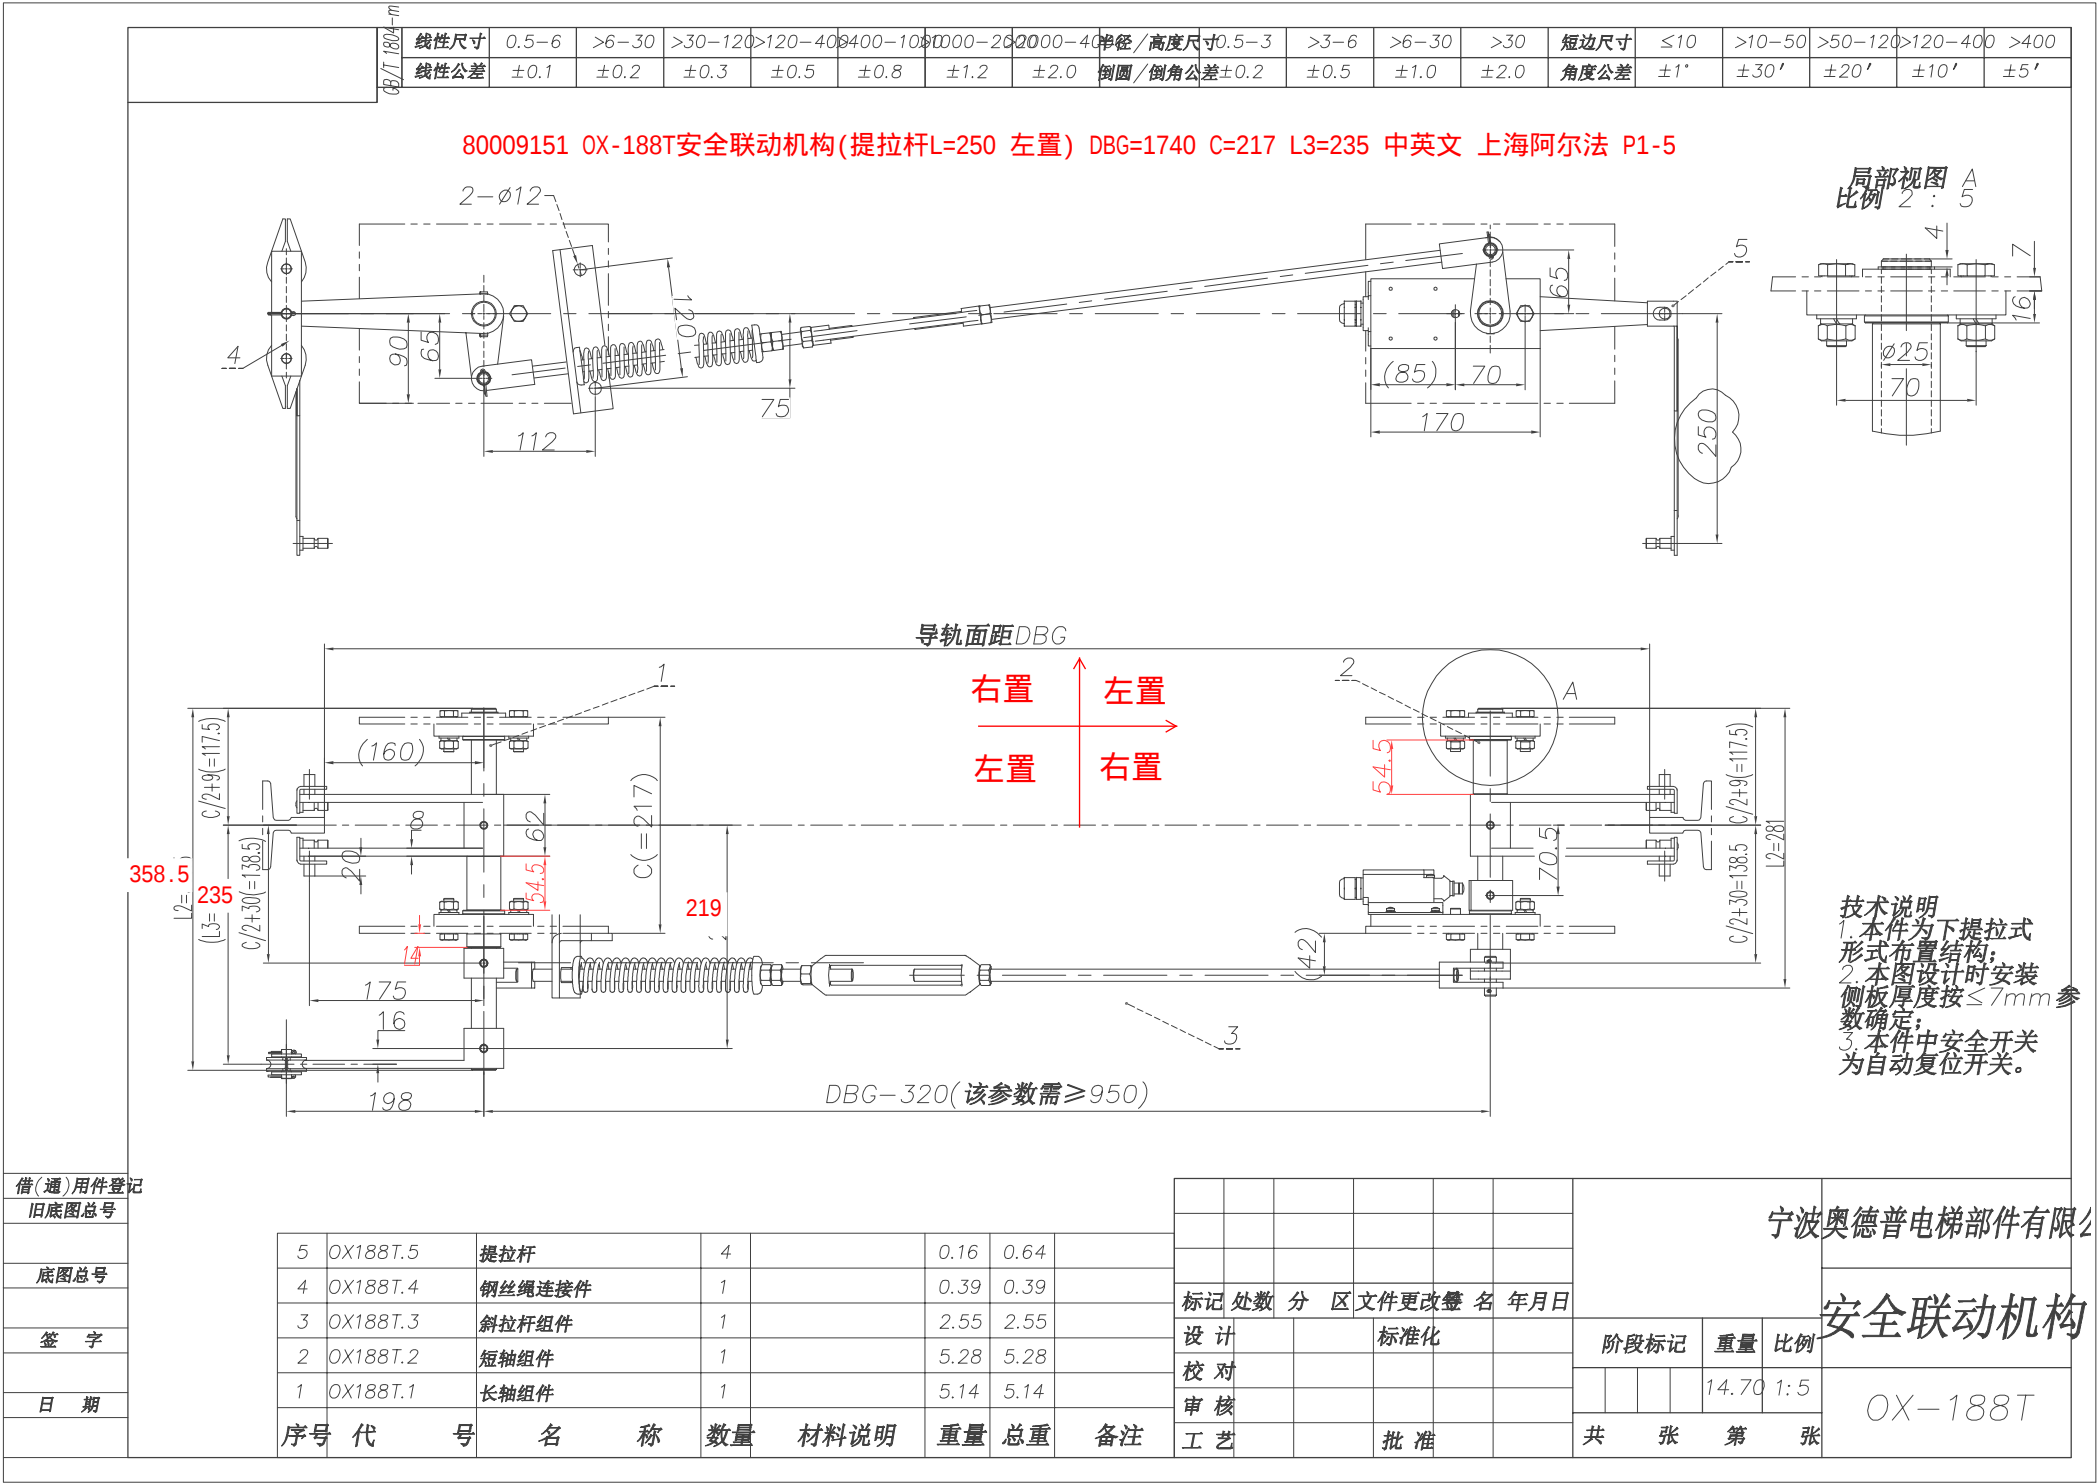

OX188T.1-4

Technical drawing of a shaft with the following dimensions and features:

- Overall length: 358.5
- Distance from left end to first step: 117.5
- Distance between first and second steps: 138.5
- Distance from second step to right end: 219
- Step height: 4
- End face thickness: 1.1
- Surface finish: 6.3
- Keyway: 3- $\varnothing 8$
- Shaft diameter: $\varnothing 25$

1. 边角去毛刺, 未注明倒角为 $0.5 \sim 1 \times 45^\circ$;
2. 表面镀锌处理;
3. 完成后摆放注意弯曲变形及表面挤压不平等缺陷;
4. 图中各参数根据指令确定, 注轴杆上的销孔根据指令确定。


							Q235A	宁波奥德普电梯部件有限公司			
标记 处数 分 区 文件更改 登 名 年月日								长轴杆			
设 计				标准 化			阶段标记				重量
校 对									1.46	4:5	0X188T.1-4
审 核											
工 艺				批 准			版本:				

GB/T 1804-

80009151 OX-188T安全联动机构(提拉杆L=250 左置) DBG=1740 C=217 L3=235 中英文 上海阿尔法 P3

Technical drawing of a mechanical part, likely a shaft or tube, showing dimensions and features. The drawing includes a central horizontal axis with three circular features (holes or mounting points) spaced along it. Key dimensions and features are labeled:

- Overall Length:** 281
- Distance from Left End to First Hole:** 117.5
- Distance Between First and Second Hole:** 70.5
- Distance Between Second and Third Hole:** 138.5
- Left End Features:** A vertical dimension of 4 is shown on the left. A small vertical feature on the far left has a width of 1.1.
- Right End Feature:** A circular feature on the right end has a diameter of $\varnothing 25$.
- Surface Finish:** A surface finish symbol (a triangle with a horizontal line) is located above the second hole, with a value of 6.3.
- Other Labels:** The text "3- $\varnothing 8$ " is written near the first hole, indicating three holes with a diameter of 8.

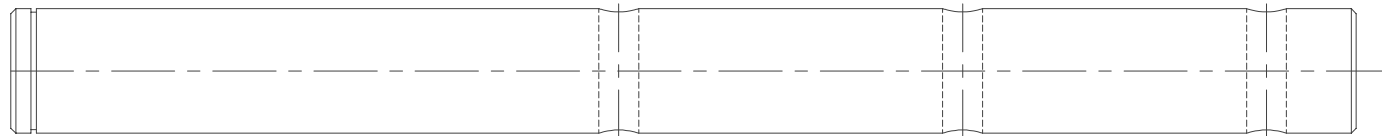


1. 边角去毛刺, 未注明倒角为 $0.5 \sim 1 \times 45^\circ$;
2. 表面镀锌处理;
3. 完成后摆放注意弯曲变形及表面挤压不平等缺陷;
4. 图中各参数根据指令确定, 注轴杆上的销孔根据指令确定。

							Q235A	宁波奥德普电梯部件有限公司		
标记 处数 分 区 文件更改 签署 名 年月日										
设计						标准化	阶段标记	重量	比例	短轴杆
校对										
审核										0X188T.2-1
工艺						批准	版本:			

OX188T.10	线性尺寸	0~6	6~30	30~120	120~400	400~1000	1000~2000	2000~4000	半径/高度尺寸	0.5~3	>3~6	>6~30	>30	短边尺寸	≤10	>10~50	>50~120	>120~400	>400
	线性公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	倒圆/倒角公差	±0.2	±0.5	±1.0	±2.0	角度公差	±1°	±30′	±20′	±10′	±5′

80009151 OX-188T安全联动机构(提拉杆L=250 左置) DBG=1740 C=217 L3=235 中英文 上海阿尔法 P5

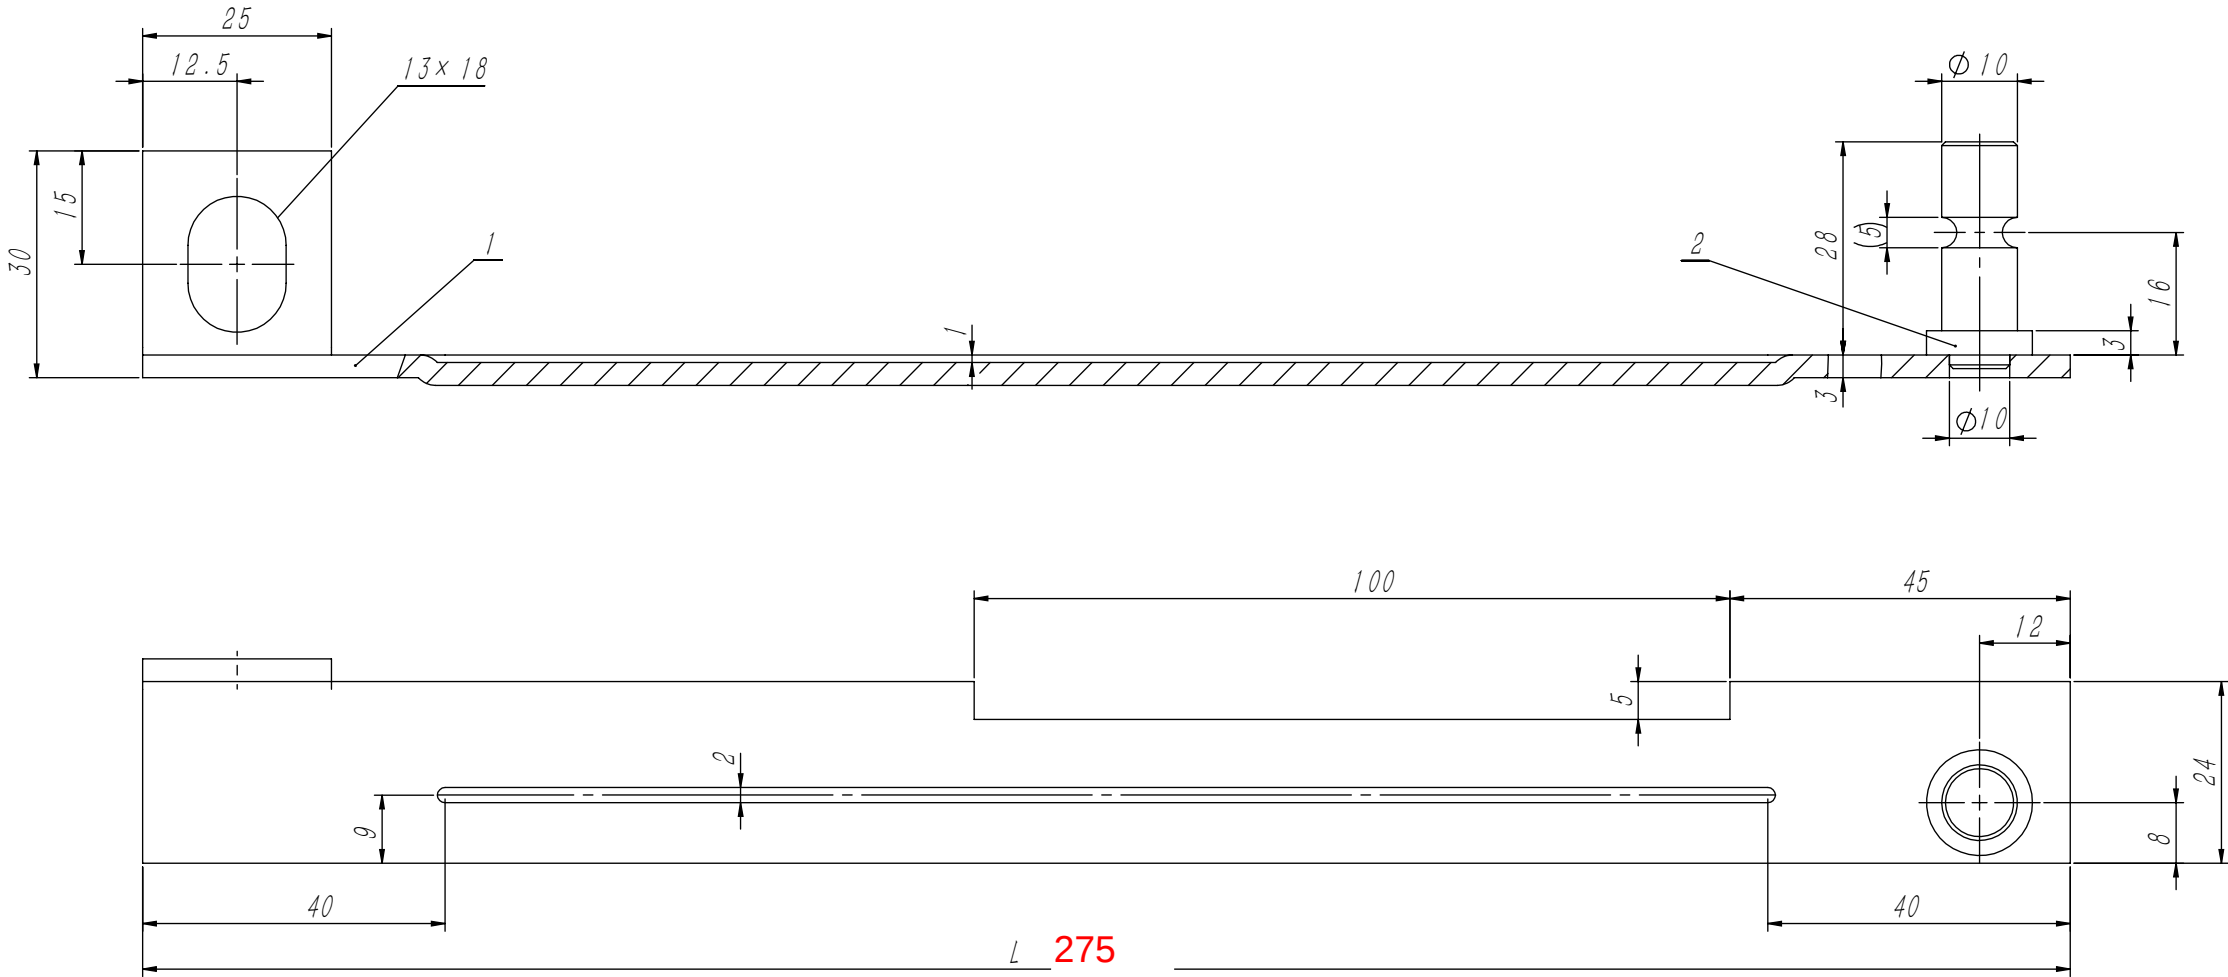

技术说明
1. 本件一套四件，左右对称各两件；
2. 件1、2采用电焊连接，表面镀锌处理。

2	OX188.12-3	连接销	1	35#	0.02	0.02	
1	OX188T.10-1	提拉板	1	Q235A/3.0	0.15	0.15	
序号	代 号	名 称	数量	材料说明	重量	总重	备注
标记	处数	分 区	文件更改号	签 名	年月日		
设 计			标准化			阶段标记	重量 比例
校 对							
审 核							
工 艺			批 准			版本:	

宁波奥德普电梯部件有限公司

提拉杆

OX188T.5

借(通)用件登记

旧底图总号

底图总号

签 字

日 期