


|      |      |      |        |         |          |           |           |         |       |      |       |      |      |     |        |         |          |      |
|------|------|------|--------|---------|----------|-----------|-----------|---------|-------|------|-------|------|------|-----|--------|---------|----------|------|
| 线性尺寸 | 0~6  | 6~30 | 30~120 | 120~400 | 400~1000 | 1000~2000 | 2000~4000 | 半径/高度尺寸 | 0.5~3 | >3~6 | >6~30 | >30  | 短边尺寸 | ≤10 | >10~50 | >50~120 | >120~400 | >400 |
| 线性公差 | ±0.1 | ±0.2 | ±0.3   | ±0.5    | ±0.8     | ±1.2      | ±2.0      | 倒圆/倒角公差 | ±0.2  | ±0.5 | ±1.0  | ±2.0 | 角度公差 | ±1° | ±30′   | ±20′    | ±10′     | ±5′  |

Technical drawing of a circular machine component, likely a pump or motor housing, showing a top view and a side view. The top view is a circle with a diameter of 137. It features a central circular feature with a diameter of  $\phi D$  and six surrounding circular features. The side view shows a rectangular base with a height of  $F+135$  and a width of  $J$ . The component has a flange with a diameter of 230 and a mounting bracket with a height of 150. The distance from the base to the center of the circular features is  $F$ . The distance from the base to the center of the mounting bracket is  $A=300$ . The distance from the base to the center of the circular features is  $240$ . The distance from the base to the center of the mounting bracket is  $70$ .

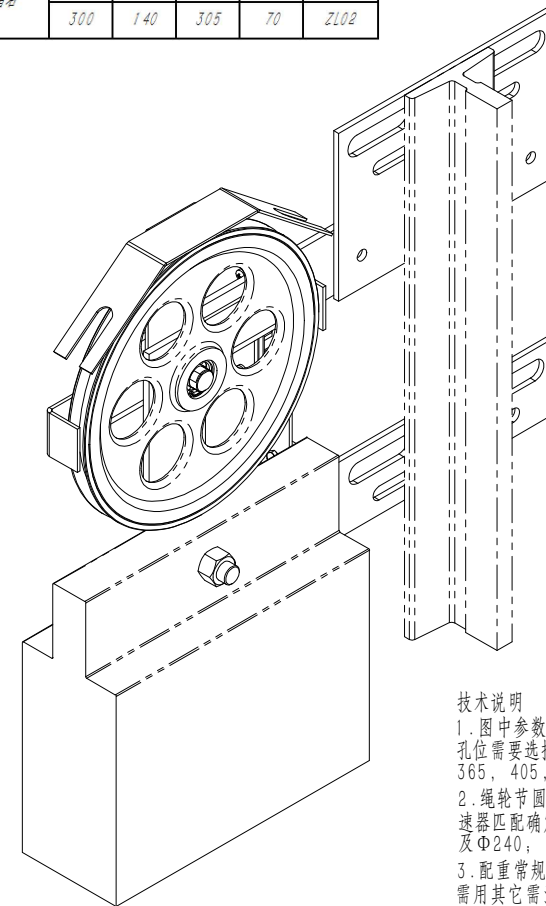

F+135

137



A=300

B=32


|     |    |     |       |     |     |       |  |  |    |    |               |  |  |  |  |           |  |  |
|-----|----|-----|-------|-----|-----|-------|--|--|----|----|---------------|--|--|--|--|-----------|--|--|
|     |    |     |       |     |     |       |  |  |    |    | 宁波奥德普电梯部件有限公司 |  |  |  |  |           |  |  |
|     |    |     |       |     |     |       |  |  |    |    |               |  |  |  |  | 涨紧装置(重锤式) |  |  |
| 标记  | 处数 | 分 区 | 文件更改号 | 签 名 | 年月日 |       |  |  |    |    |               |  |  |  |  |           |  |  |
| 设 计 |    |     |       | 标准化 |     | 阶段标记  |  |  | 重量 | 比例 | OX300         |  |  |  |  |           |  |  |
| 校 对 |    |     |       |     |     |       |  |  |    |    |               |  |  |  |  |           |  |  |
| 审 核 |    |     |       |     |     |       |  |  |    |    |               |  |  |  |  |           |  |  |
| 工 艺 |    |     |       | 批 准 |     | 物料编号: |  |  |    |    |               |  |  |  |  |           |  |  |

|            |
|------------|
| 借(通)用件登记   |
| 旧底图总号      |
| 底图总号       |
|            |
|            |
|            |
| 签    字     |
|            |
| 日        期 |
|            |

|              |      |     |      |        |         |          |           |           |
|--------------|------|-----|------|--------|---------|----------|-----------|-----------|
| OX300.3-1(S) | 基本尺寸 | 0~6 | 6~30 | 30~120 | 120~400 | 400~1000 | 1000~2000 | 2000~4000 |
|              | 公差   | 0.1 | 0.2  | 0.3    | 0.5     | 0.8      | 1.2       | 2.0       |

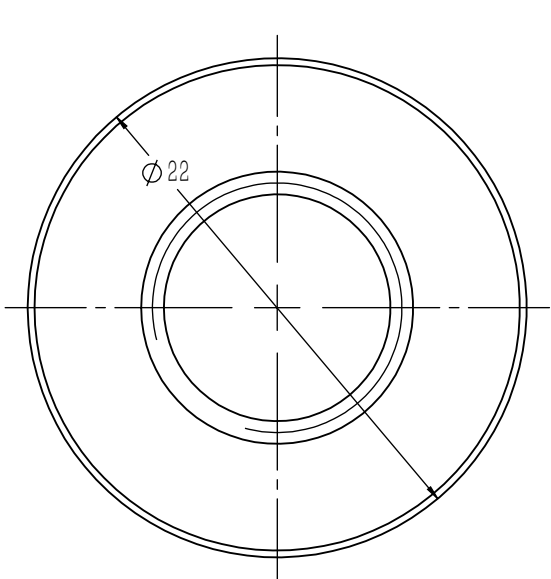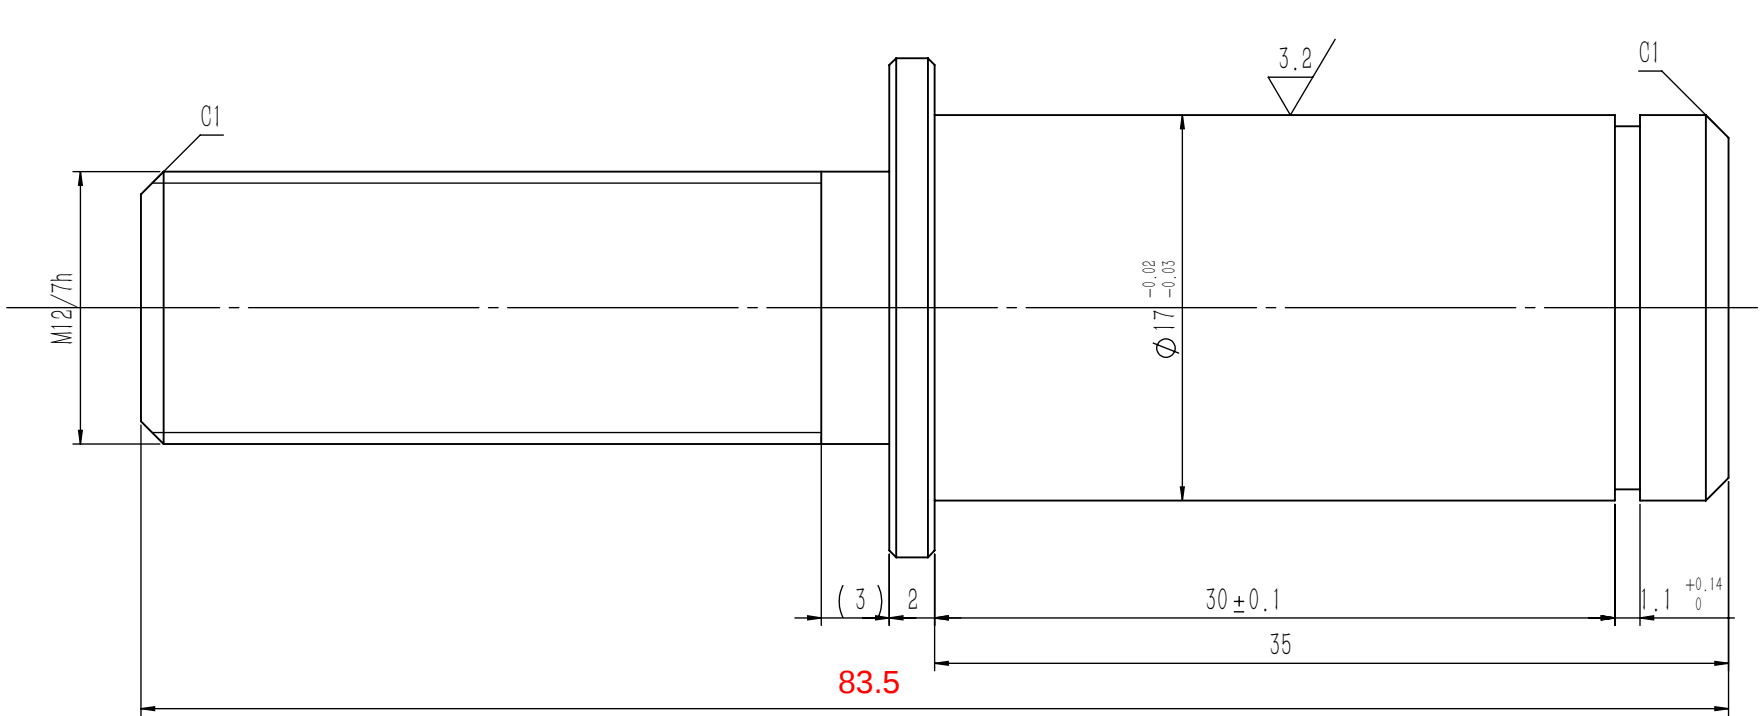

其余  $\sqrt{6.3}$

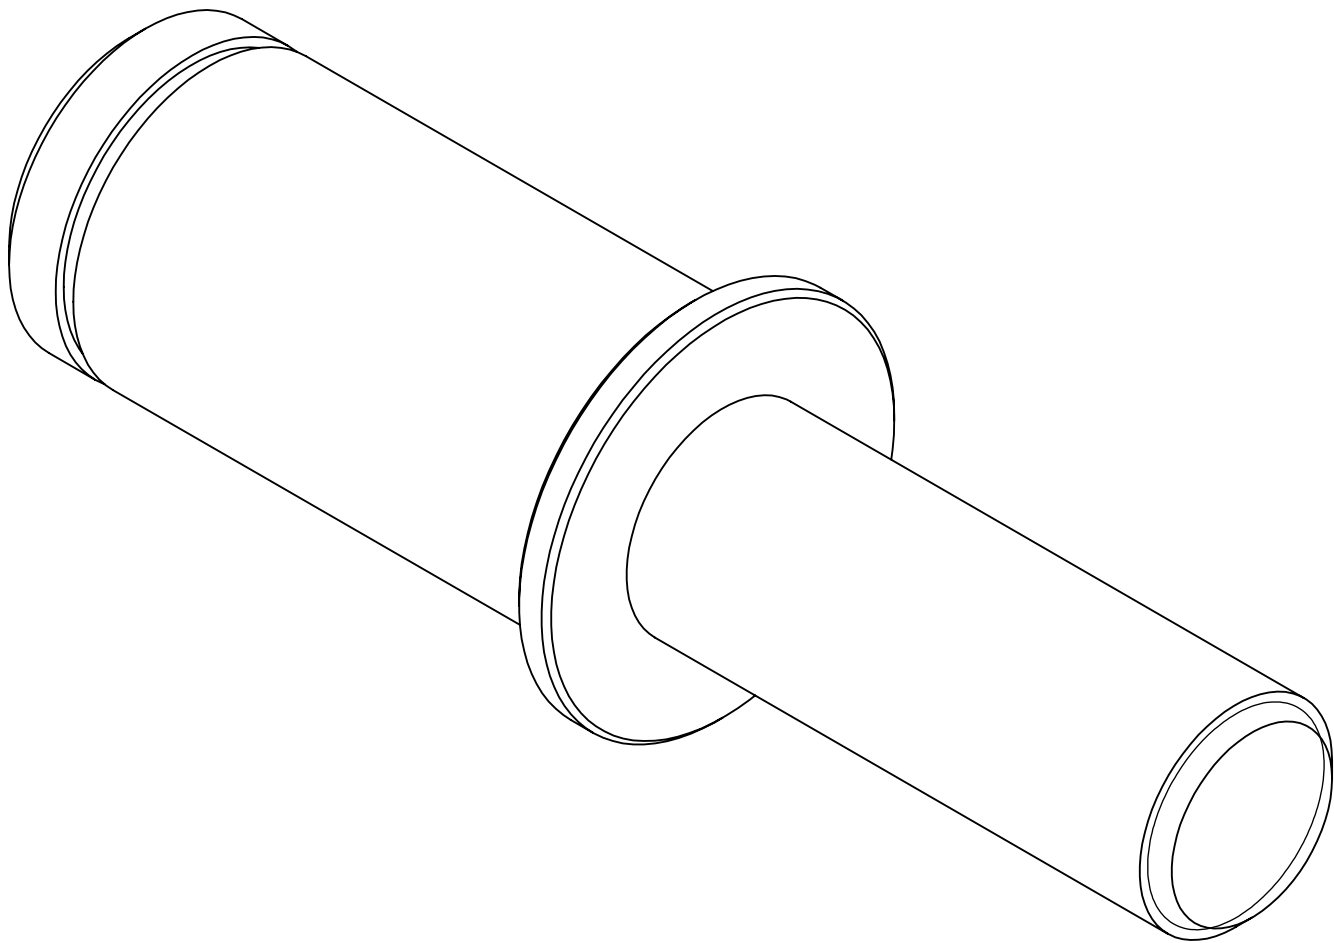

技术说明  
1.边角去毛刺，未注明倒角为 $0.3\sim 0.5\times 45^{\circ}$ ；  
2.表面镀锌处理；  
3.本件适用于双轴承绳轮装配中。

|          |
|----------|
| 借(通)用件登记 |
| 旧底图总号    |
|          |
| 底图总号     |
|          |
| 签 字      |
|          |
| 日 期      |
|          |

|     |    |     |       |     |       |         |               |       |  |    |    |  |
|-----|----|-----|-------|-----|-------|---------|---------------|-------|--|----|----|--|
|     |    |     |       |     |       | 20#/Φ22 | 宁波奥德普电梯部件有限公司 |       |  |    |    |  |
|     |    |     |       |     |       |         | 绳轮主轴(双)       |       |  |    |    |  |
| 标记  | 处数 | 分 区 | 文件更改号 | 签 名 | 年、月、日 |         |               |       |  |    |    |  |
| 设 计 |    |     | 标准化   |     |       | 阶段标记    |               |       |  | 重量 | 比例 |  |
| 校 对 |    |     |       |     |       |         |               |       |  |    |    |  |
| 审 核 |    |     |       |     |       |         |               |       |  |    |    |  |
| 工 艺 |    |     | 批 准   |     |       | 共 1 张   |               | 第 1 张 |  |    |    |  |
|     |    |     |       |     |       |         | 0X300.3-1(S)  |       |  |    |    |  |

