
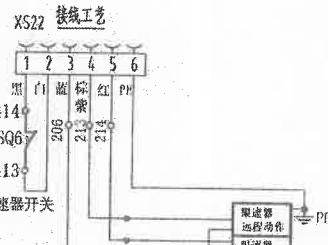
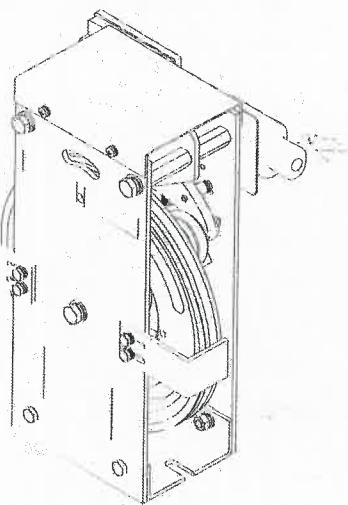


1	直线尺寸	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000	半径/高度尺寸	0.5-3	>3-6	>6-30	>30	短边尺寸	<10	>10-50	>50-120	>120-400	>400
	线性公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	倒圆/倒角公差	±0.2	±0.5	±1	±2	角度公差	±1°	±30'	±20'	±10'	±5'

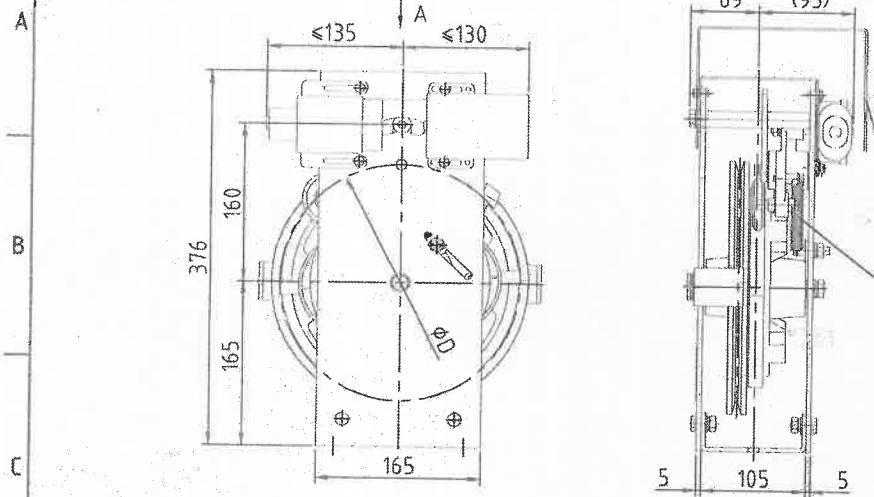

物料编码说明：  
编码构成：零件代码.装配号  
编码示例：Y1656901.21G05026-27

参数表		
额定速度	$v \leq 1.0m/s$	$1.0m/s < v \leq 1.75m/s$
钢丝绳直径	6mm	8mm
绳轮直径	200mm	240mm
张紧力	$\geq 600N$	$\geq 600N$
超速开关电压等级	AC220	AC220

#### 技术要求：


1. 用于无机房双向限速器，按过桥调试标准按本厂规定，调试后加铅封和红漆封记；
2. 标牌位置按图比例：本图按奥美普 OX-187 例制，同样适用于其他厂家的同等限速器；
3. 随机装箱的包括：限速器（图示状态，不需要底座板）、合格证、安装使用说明书、复位步骤说明；
4. 适用于上行超速的保护装置为曳引机抱闸，可与电触点式夹绳器配套使用；
5. 其他详见《电梯安装调试验手册》与《限速器安装使用说明书》。
6. 限速器配套接插件为6芯安普插座，型号：1-480705（配套插针套：350536-1）；线长预留200mm。
7. 故障件标识采用喷码（或油墨、油漆）永久不掉落；

序号	代号	名称	材料	装配号	数量		备注
					单件	总计	
3	YPV16570P01	限速器罩	t2.0/Q235	3	1		
2	PE19575A01	限速器插件预置线	组件	2	1		
	PV16504A06				1		作业204
	PV16504A05				1		作业203
	PV16504A04				1		作业202
	PV16504A03				1		作业201


YPV16569A01-04

序号	代号	材料	重量	说明		
				D	C	B
4	YPV16569A04	螺	$v=1.6m/s, \phi D=240$			
3	YPV16569A03	螺	$v=1.75m/s, \phi D=240$			
2	YPV16569A02	螺	$v=1.5m/s, \phi D=240$			
1	YPV16569A01	螺	$v=1.0m/s, \phi D=200$			
D						
C						
B						
A						
版本	标记	通知号	签名	日期	更改内容及原因	
设计		10.28		比例 1:5	图幅 A3	
校对				④	共 1 页 第 1 页	JIULI JIUYUE® 巨立电梯股份有限公司
标准化						
审批						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8						
6						
7						
8					</td	


1	2	3	4	5	6	7	8
直角尺寸 mm	0.5-6 $\pm 0.1$	>6-30 $\pm 0.2$	>30-120 $\pm 0.3$	>120-400 $\pm 0.5$	>400-1000 $\pm 0.8$	>1000-2000 $\pm 1.2$	>2000-4000 $\pm 2$
圆柱公差 mm	0.5-3 $\pm 0.2$	>3-6 $\pm 0.5$	>6-30 $\pm 1$	半径/直角尺寸 mm	>3-6 $\pm 2$	>6-30 $\pm 2$	端边尺寸 mm

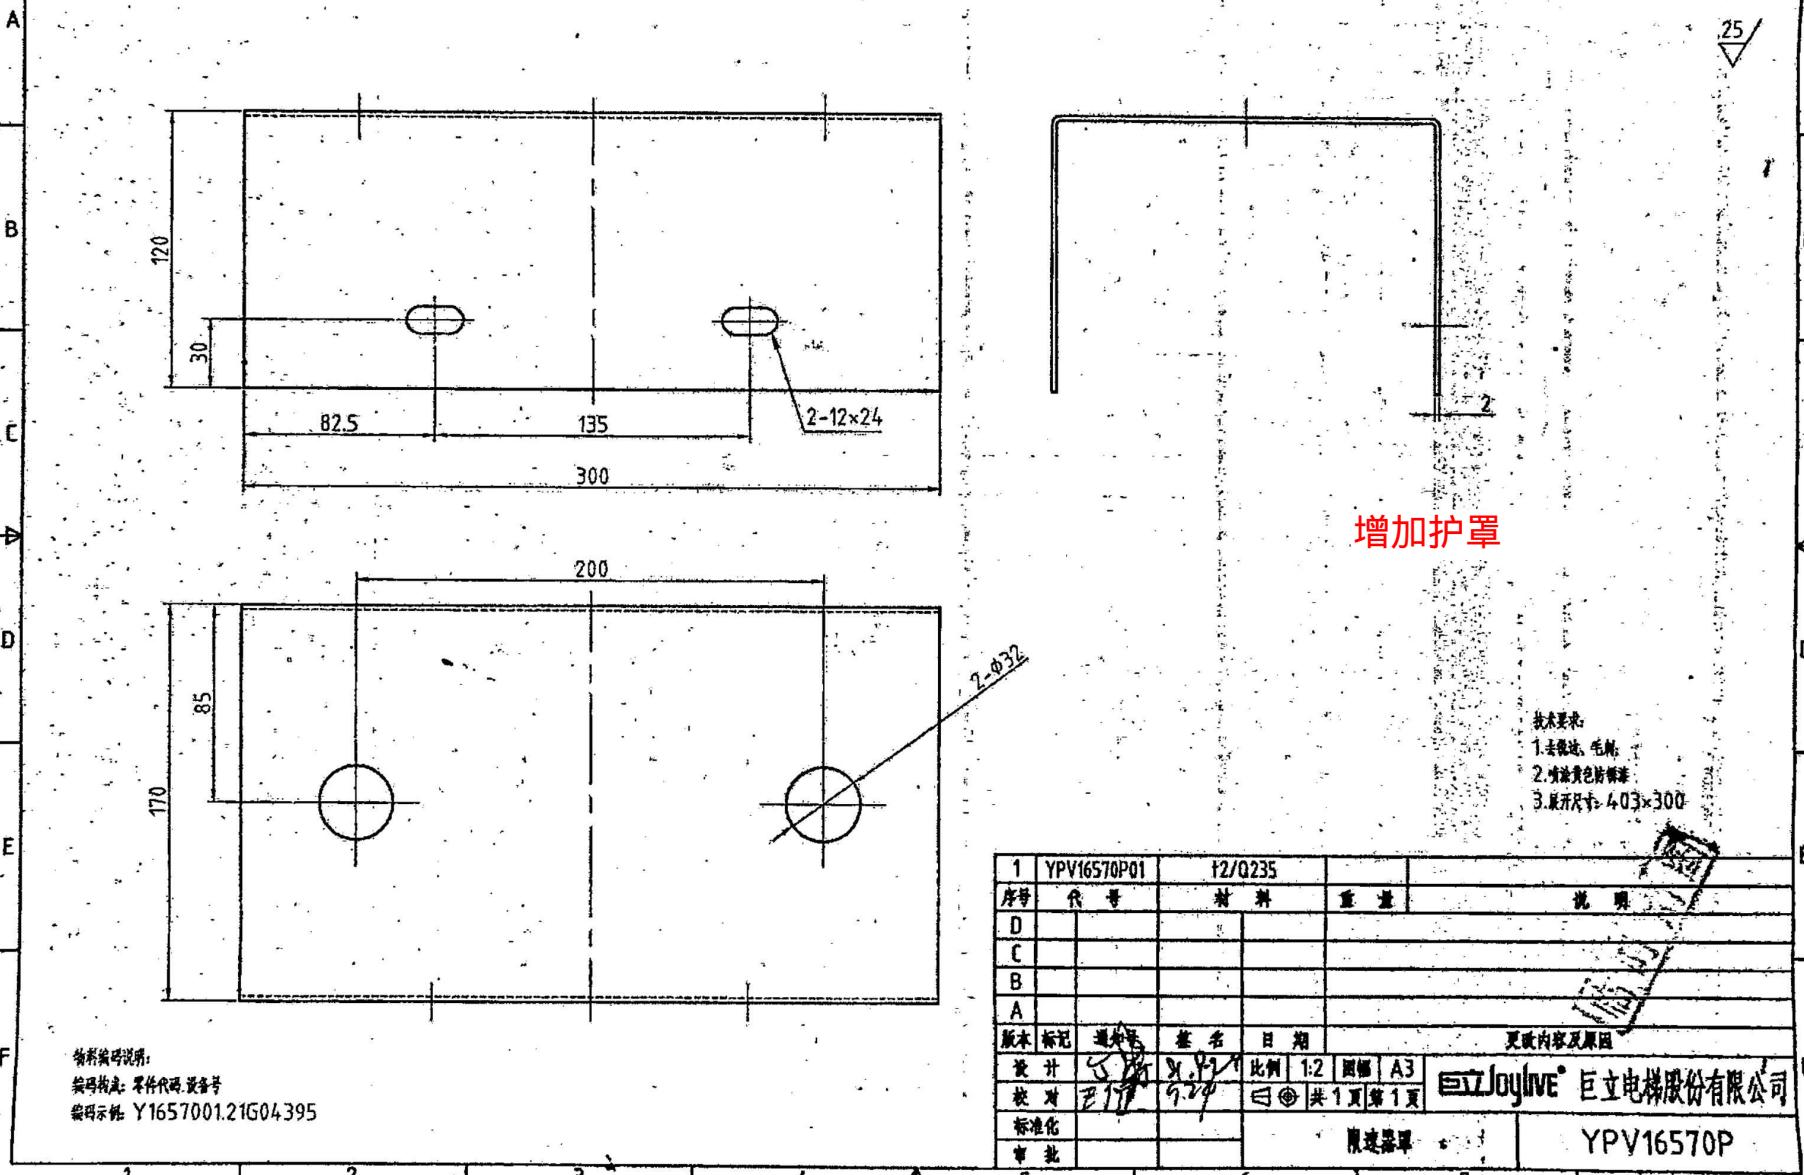


XS1-23接线示意

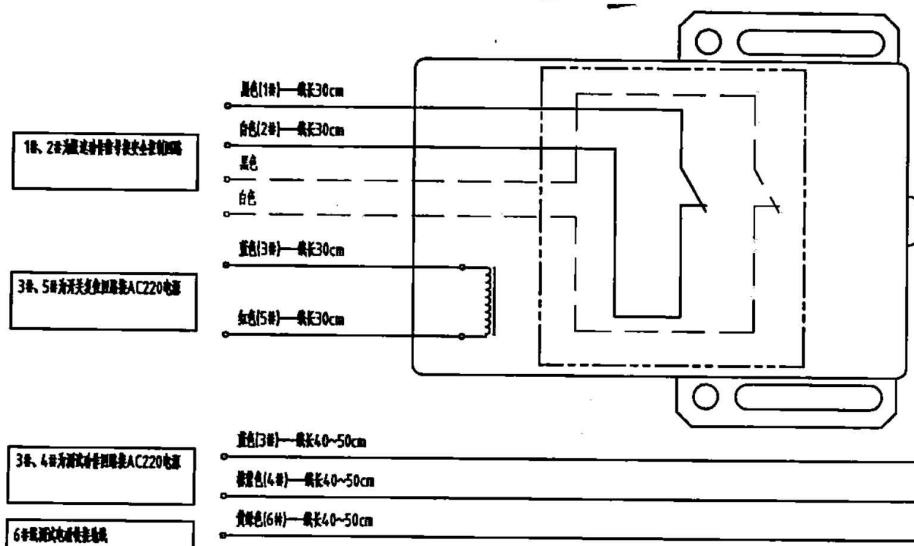

限速测试动作线圈

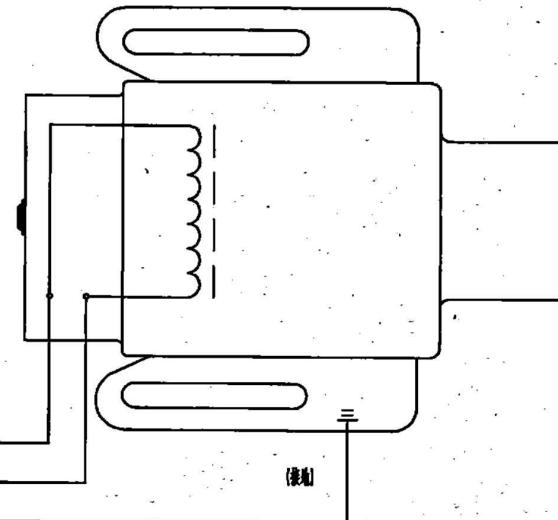

线号示意 (接插件时)

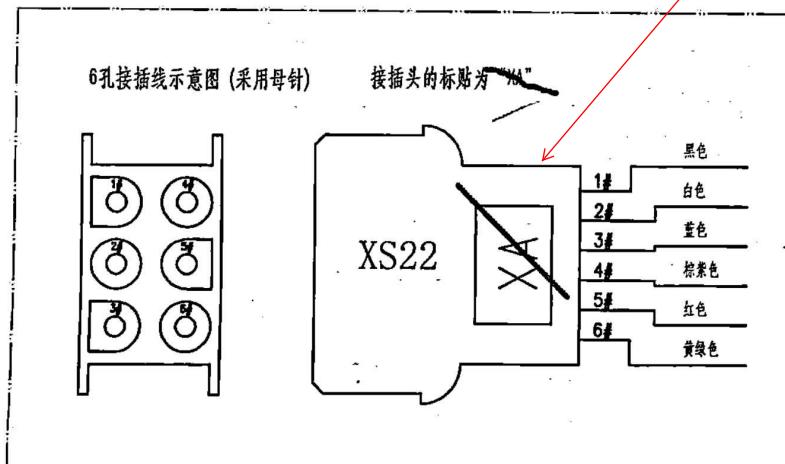

采用XA接插件，标号更改为XS22

## 技术说明:

- 1.本件按使用接插件要求绘制匹配,接插头采用安普六孔插座,插针均为母针;
- 2.六孔插座标号采用“XA”;
- 3.本图仅适用于OX-187、OX-186、OX-186A限速器,望相关部门注意控制调整。

① 整体更新换版 周正 20201225

标记 处数 分区 更改文件号(内容) 签名 年、月、日

设计 周正 20201225 标准化

审核

工艺 批准

示意图

限速器接插件

OX-187-DQXA