



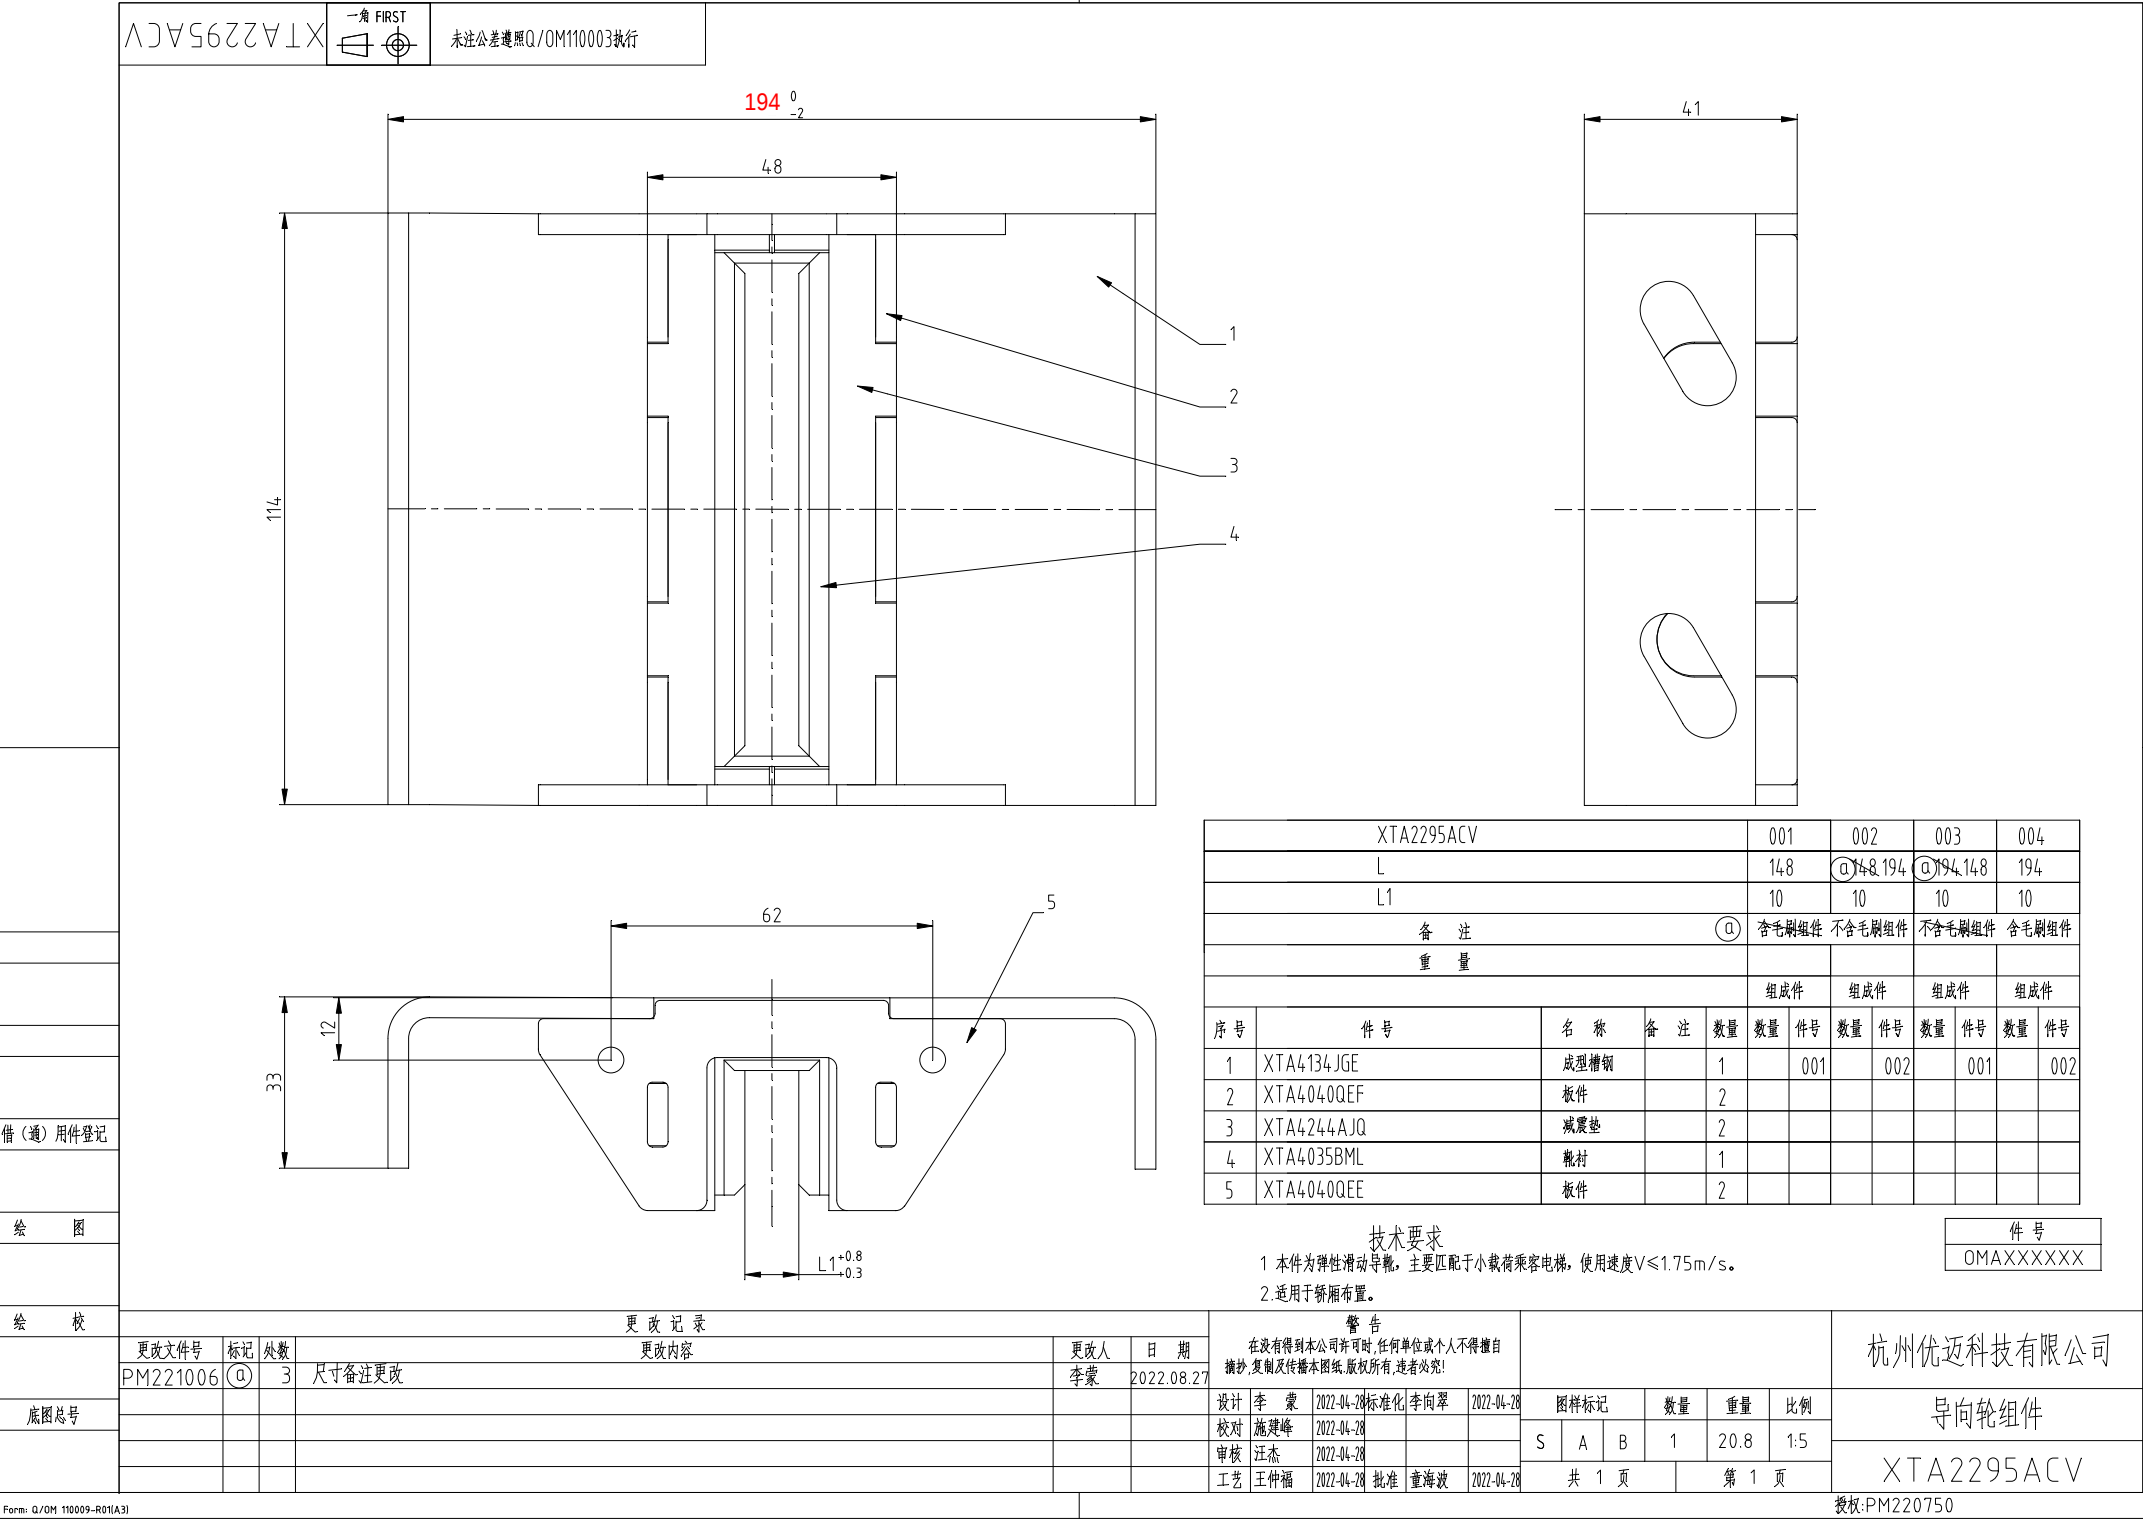

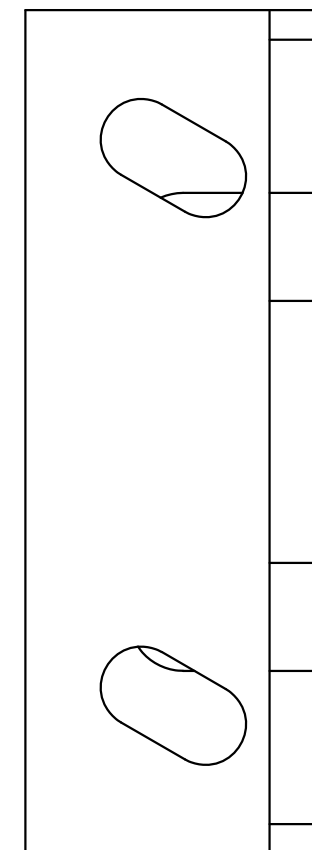

Technical drawing of a mechanical part, likely a bracket or support structure, shown in a cross-sectional view. The drawing includes two vertical dimension lines on the left side. The outer dimension line is labeled 41, indicating the total height of the part. The inner dimension line is labeled 33, indicating the height of the upper section. The part features a central vertical slot, two circular holes (one on each side of the slot), and a complex profile with rounded corners and a hatched section on the right side.

- 1、采用电焊连接，无虚焊、漏焊，焊后除渣；
- 2、表面电镀白锌，厚度不得小于 $8\mu\text{m}$ 。

-03	支撑板	DWG	X310TAA03					-03	2	
-02	盖板	DWG	X310TAA02					-02	2	
-01	安装板	DWG	X310TAA01					-01	1	
-POS	名 称	DEF	图 号	品/群	材 料	涂 装	备 注	-POS	G01	G02

实施日期	
------	--

 宁波奥德普电梯部件有限公司
NINGBO AODEPU ELEVATOR COMPONENTS CO., LTD.

导靴架




1:1

X310TAA00

图幅: A3 Ver 1.1


标记	处数	更 改 内 容	签 名	年月日

其余12.5 $\sqrt{}$

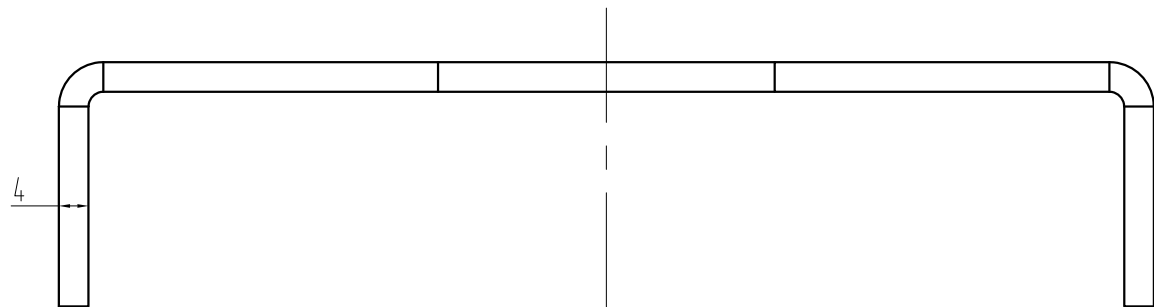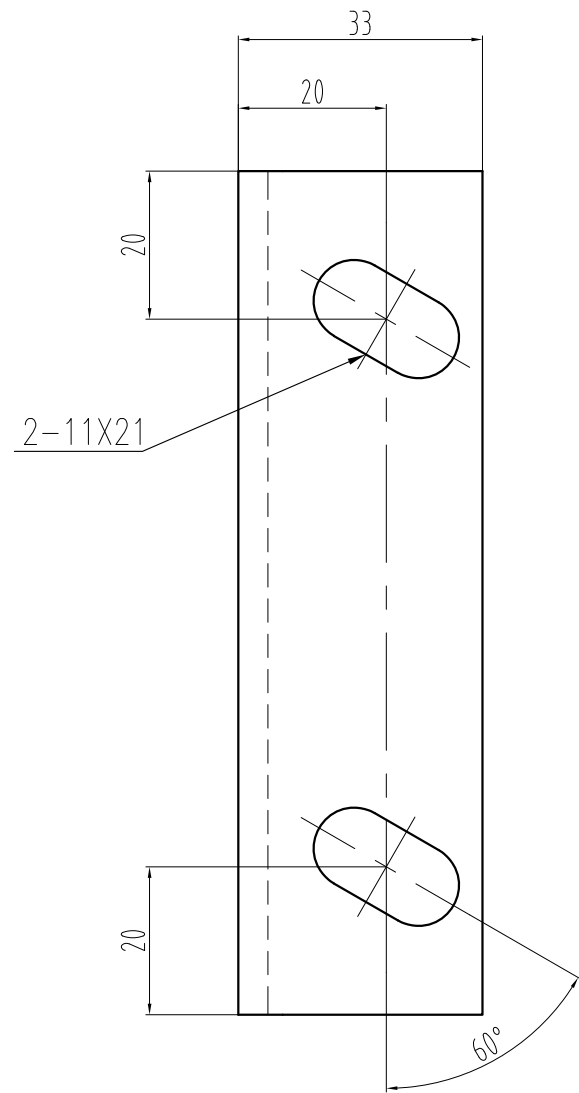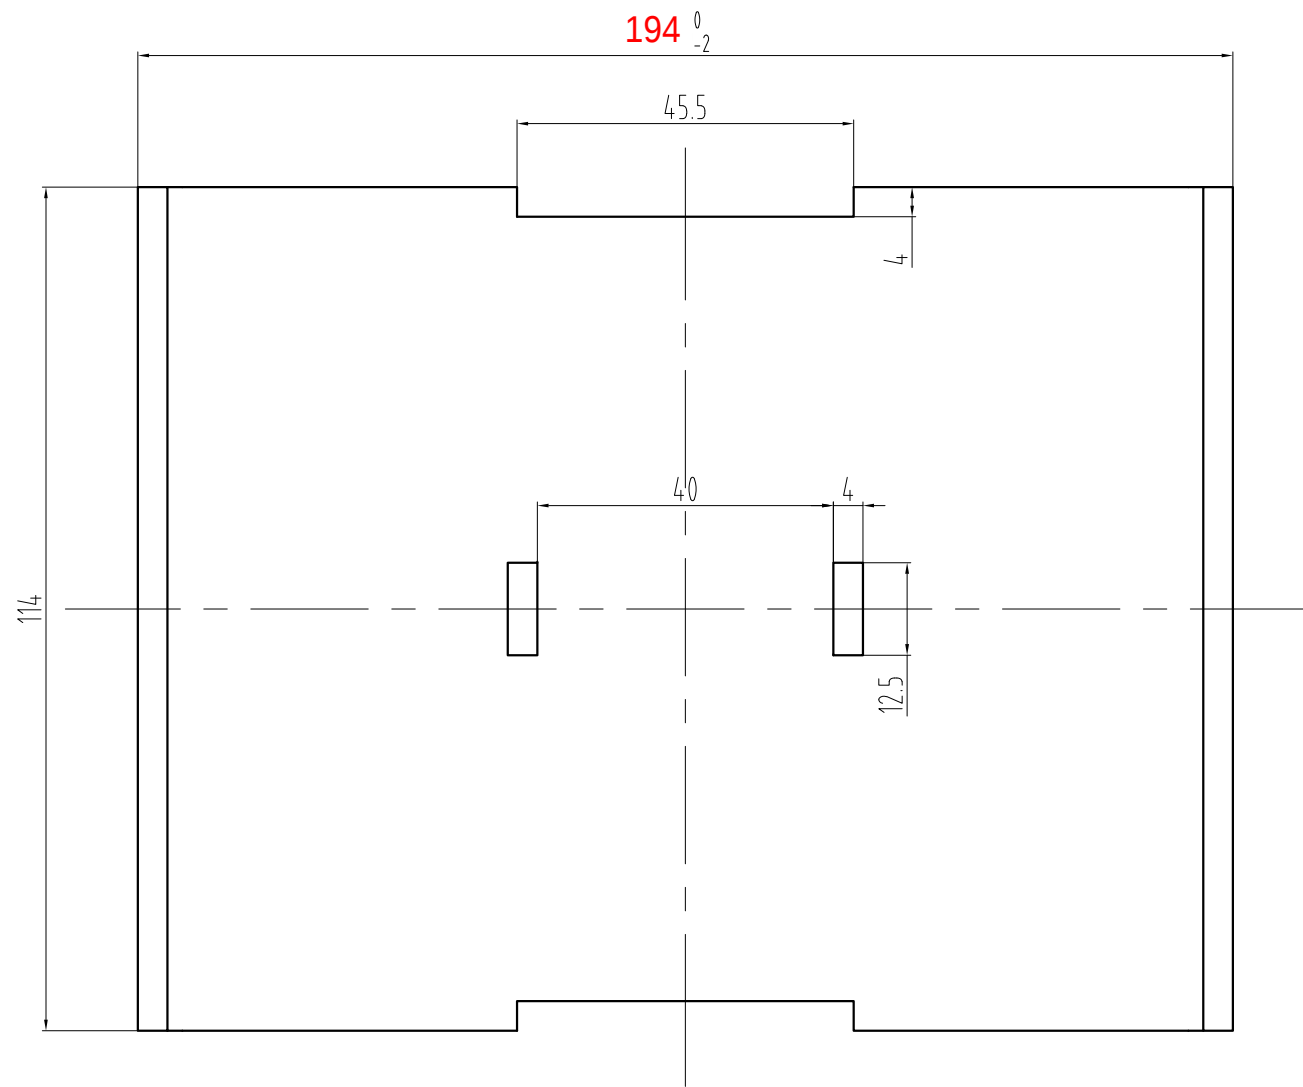

技术说明：
1、去除飞边毛刺；
2、防锈处理。

图幅: A3 Ver 1.1

					第一视角 			实施日期			 宁波奥德普电梯部件有限公司 NINGBO AODEPU ELEVATOR COMPONENTS CO.,LTD.							
					CC 关键特性						Q235/4			安装板				
					设计	<>	<>	标准化									阶段标记	
															1:1	X310TAA01		
标记	处数	更改内容			签名	年月日	工艺		批准			第 1 张		共 1 张				