


Tolerance class		Permissible deviations from the nominal value d (in mm)							
Type	Description	0,5<d≤3	3<d≤6	6<d≤10	10<d≤12	12<d≤40	40<d≤100	100<d≤200	200<d≤400
f	thin	±0,05	±0,05	±0,1	±0,15	±0,2	±0,3	±0,5	-
m	medium	±0,1	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2
c	thick	±0,2	±0,3	±0,5	±0,8	±1,2	±2	±3	±4
v	very thick	-	±0,5	±1	±1,5	±2,5	±4	±6	±8

Tolerancias ISO 2768
Table 1. Tolerances for linear dimensions, except rounded edges

Tube Ø27x2

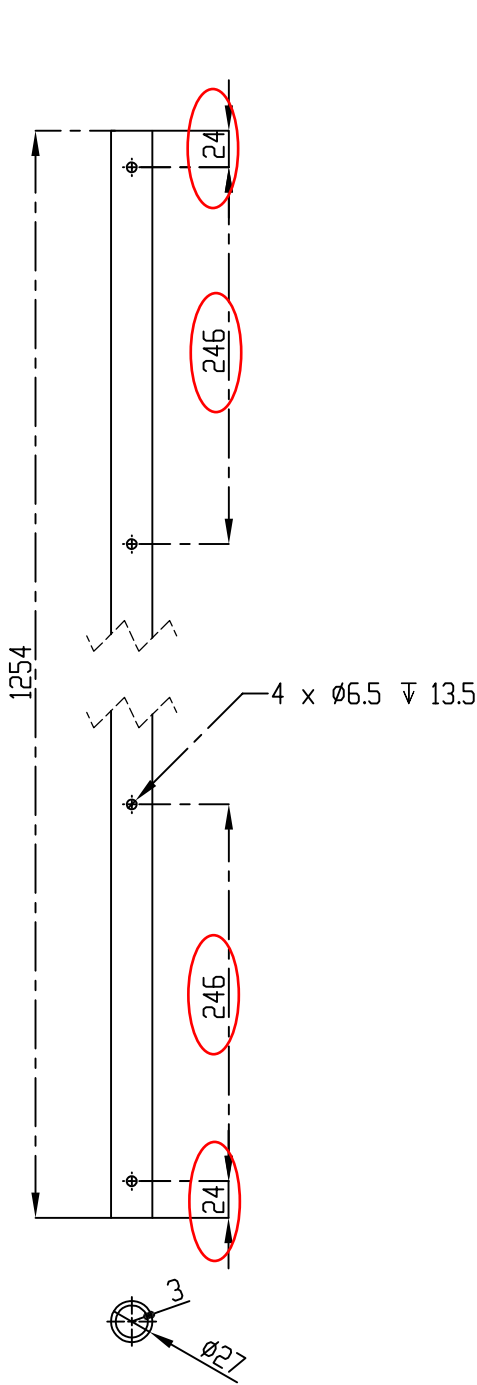

备注：此提拉杆同时配一套弹簧，左右件各一件，件号如下：
PVKS3Z198001/V20E000105，
PVKS3Z198002/V20E000105.

00	25/10/2021	SAM	SAM	1º ed. del plano											
Rev.	Created Date	Creat. By	Checked	Change Description											
Finishing ---				Toler.	S/ISO 2768-c (mm)		Format	A4		Scale	1:5		VOLKSLIFT		
Material: Perfil acero UNE-EN 10025-2 S235JR						File.文件		VL07100002							
Title sincron bar (提拉杆) AODEPU OX-210B. OKFIT CF				Thick.厚度 (mm)		Bending 折弯半径 (mm)		Bend.Ded. (mm)		Weight (kg)		Sheet no.		Rev.	
				2						2.22		1/1			
				Project项目			T22030066.a		Part Code零件号		VL07100002 / VKS3Z301C01				