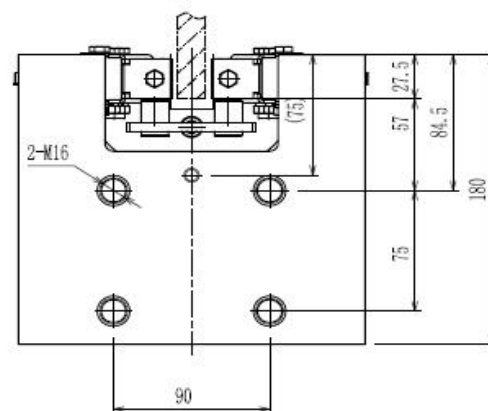
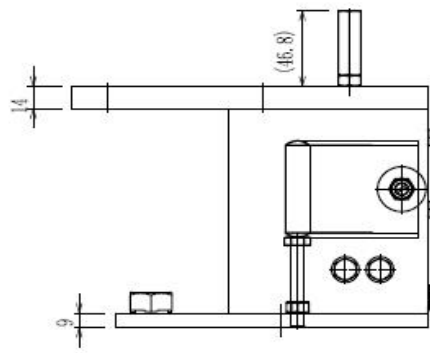



0.10

1. 每个轿厢需用两个安全钳;
2. 导轨宽度B=10, 15.88, 16mm; 导轨硬度<HB140;
3. 装配时各运动付应涂加润滑油;
4. 三颗M12×14螺栓调整后加螺纹固定剂;
5. 装配时两楔块对中调整后, 拼紧螺栓;
6. 根据用户要求的参数, 调整板簧弹开量, 用螺母拼紧调整螺栓并加以漆封;
7. 两活动模块最大行程为65mm;

件号	V(m/s)	适用(P+Q)范围(kg)	导轨宽度(mm)	高度H	型号
YSFS3H505001	1	$900 \leq P+Q \leq 2800$	10	150	OX-188B
YSFS3H505002	1.5	$900 \leq P+Q \leq 2800$	10	150	OX-188B
YSFS3H505003	1.75	$900 \leq P+Q \leq 2800$	10	150	OX-188B
YSFS3H505004	1	$900 \leq P+Q \leq 2800$	15.88	150	OX-188B
YSFS3H505005	1.5	$900 \leq P+Q \leq 2800$	15.88	150	OX-188B
YSFS3H505006	1.75	$900 \leq P+Q \leq 2800$	15.88	150	OX-188B
YSFS3H505007	1	$1000 \leq P+Q \leq 4000$	15.88	195	OX-188
YSFS3H505008	1.5	$1000 \leq P+Q \leq 4000$	15.88	195	OX-188
YSFS3H505009	1.75	$1000 \leq P+Q \leq 4000$	15.88	195	OX-188
YSFS3H505010	1	$900 \leq P+Q \leq 2800$	16	150	OX-188B
YSFS3H505011	1.5	$900 \leq P+Q \leq 2800$	16	150	OX-188B
YSFS3H505012	1.75	$900 \leq P+Q \leq 2800$	16	150	OX-188B
YSFS3H505013	1	$1000 \leq P+Q \leq 4000$	16	195	OX-188
YSFS3H505014	1.5	$1000 \leq P+Q \leq 4000$	16	195	OX-188
YSFS3H505015	1.75	$1000 \leq P+Q \leq 4000$	16	195	OX-188
YSFS3H505999	赋值	赋值	赋值	赋值	赋值

						宁波奥德普							
标记	处数	分区	更改文件号	签名	年月日								
设计			标准化			阶段标记		重量	比例	YSFS3H505			
校对						-	-	-	-			0kg	1:3
审核													
工艺			批准			共 1 张		第 1 张					

宁波奥德普

YSFS
御盛富士

安全钳

YSFS3H505

共 1 张 第 1 张