
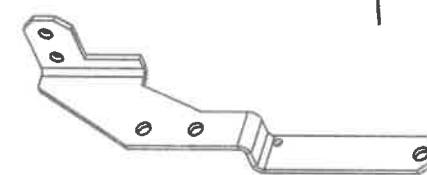



FB-XOA4133GJH001-XODTDY22295

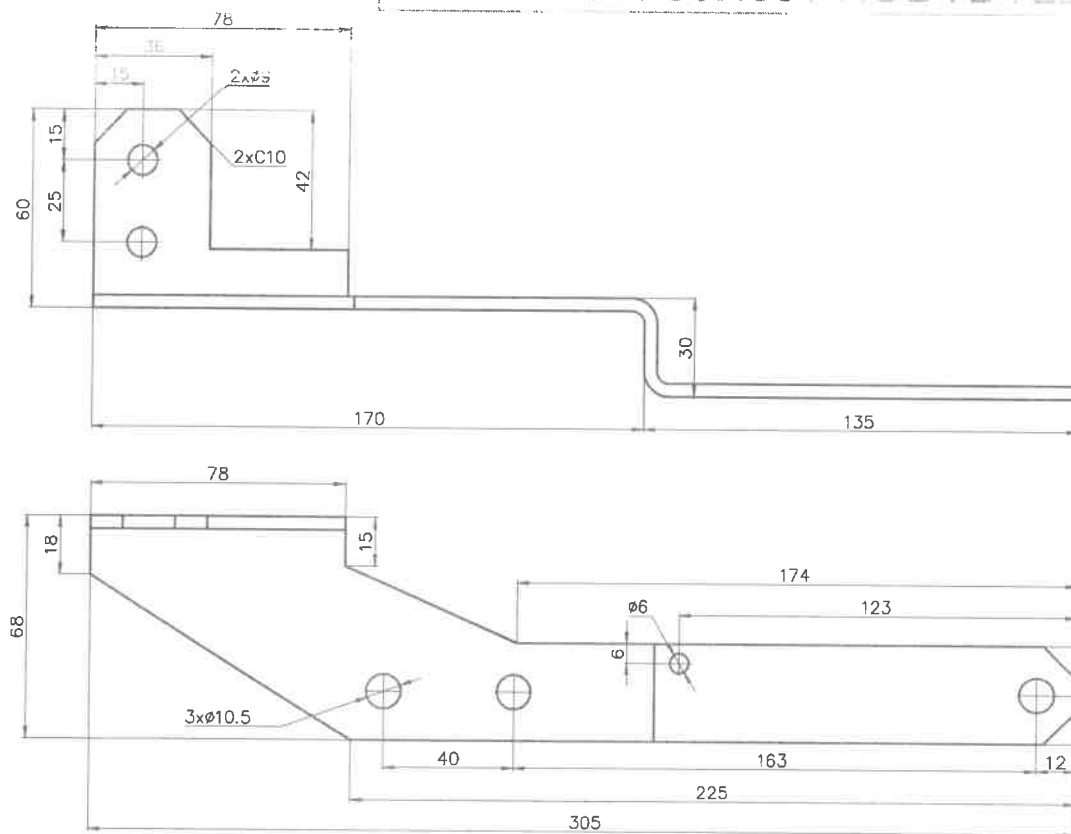

1个

GB/T 180				
规格尺寸				
材料名称及规格				
数量				
备注				

其余 12.5

技术要求

1. 材料性能: [RAL7023]
2. 表面处理: 镀锌及钝化处理。
3. 紧固件: 304不锈钢。

序号	名称	规格	数量	单位	备注	材料	重量(kg)	备注
1	FB-XOA4133GJH001-XODTDY22295		1	个				
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
21								
22								
23								
24								
25								
26								
27								
28								
29								
30								
31								
32								
33								
34								
35								
36								
37								
38								
39								
40								
41								
42								
43								
44								
45								
46								
47								
48								
49								
50								
51								
52								
53								
54								
55								
56								
57								
58								
59								
60								
61								
62								
63								
64								
65								
66								
67								
68								
69								
70								
71								
72								
73								
74								
75								
76								
77								
78								
79								
80								
81								
82								
83								
84								
85								
86								
87								
88								
89								
90								
91								
92								
93								
94								
95								
96								
97								
98								
99								
100								

XOA4133GJH	001
重量(kg)	
备注	
材料: GB/T 708	杭州西奥电梯有限公司
0235A, GB/T 11253	XOA4133GJH
比例: 1:100	杭州西奥电梯有限公司
日期: 2019-12-20	CAE

20	120
----	-----

1

7

	三
--	---

	C
--	---

5



	(
--	---


(

(

L

K

A-A

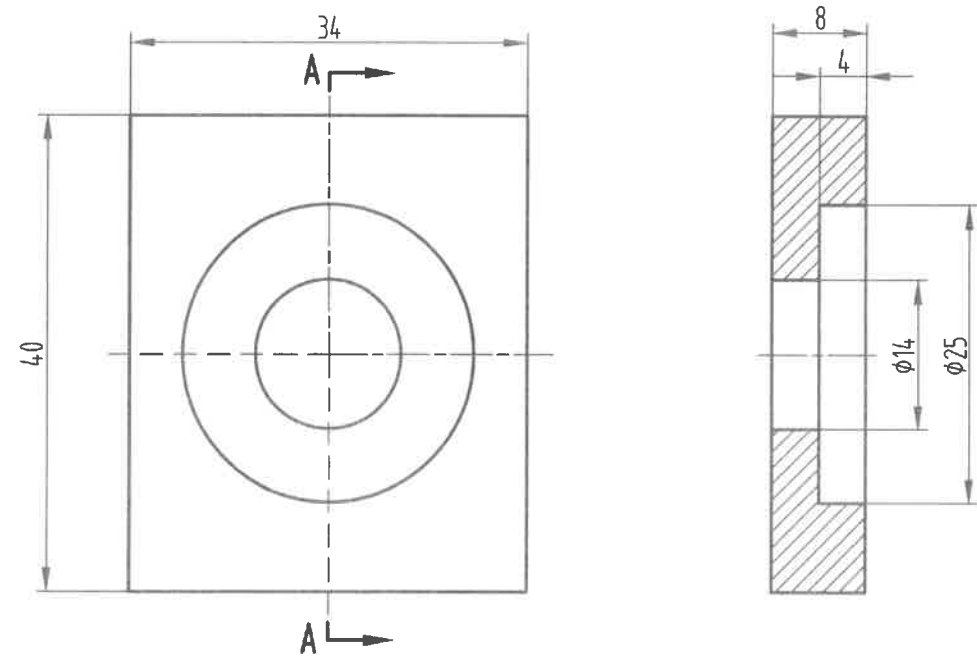

24

2.表面噴粉，顏色同井道部件顏色。

CA号	标记	处数	更改内容	更改人	日期	设计	黄志强	钢板 8 GB/T 709 Q235A GB/T 3274	杭州西奥电梯有限公司	
						校核	薛伟		XQA4012AGY	
						标准化	薛艳妮			整块
						批准	胡鹏飞			
						审核	2020-04-20	共 1 页 第 1 页	CA号	

X0A4012AGY	001
重量 (kg)	
备注	
钢板 8 GB/T 709 Q235A GB/T 3274	杭州西奥电梯有限公司
	X0A4012AGY
比例: 此图不按比例	垫块
共 1 页 第 1 页	C47

销轴 (摘自GB/T 882-2000)

2/7

10		12		14		16	
14	2.5	16	3	18	3	20	3.5
2.5	3.2	3	4	3	4	4	4
3.2	0.5	4	0.5	4	0.5	4	0.5
0.5	1.5	0.5	1.5	0.5	1.5	0.5	1.5
1.5	0.5	1.5	0.5	1.5	0.5	1.5	0.5
0.5	4	0.5	5	0.5	5	0.5	5
4	14~120	5	20~120	5	20~120	5	20~140
14~120	6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 35, 40, 45, 48, 50, 55, 60	20~120	6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 35, 40, 45, 48, 50, 55, 60	20~120	6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 35, 40, 45, 48, 50, 55, 60	20~140	6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30

注：1. 标记示例：
公称直径d=10mm、长度l=50mm、材料为35钢、热处理硬度28~38HRC、表面氧化处理的A型销轴：
销轴 GB 882 10×50
2. lh=1公称-X，lh(+IT14, n)。
3. 本表的单位是mm。

附图

