


Technical drawing of the DBG-340 hydraulic bracket assembly. The drawing shows a side view of the bracket with various dimensions and components labeled. Key dimensions include a total length of 225, a mounting bracket width of 14, a distance of 66 from the mounting point to the first joint, a distance of 230 from the mounting point to the second joint, a distance of 150 from the second joint to the end of the bracket, and a distance of 45 from the end of the bracket to the hydraulic cylinder. The hydraulic cylinder is labeled DBG-340 (具体按实际可作调整, DBG > 1100mm). The drawing also shows a 12° angle, a 45° angle, and a 4-5 x 20 dimension. The bracket is made of 2-φ11 material.

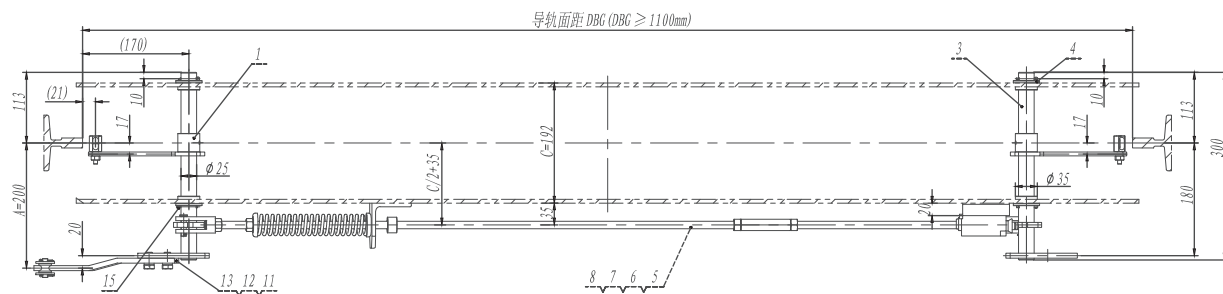

15	GB/T 91-2000	开口销3.2X25	4		1.74	6.96	
14	OX188T.5	钢丝绳连接件	1		0.03	0.03	
13	OX188BT-4	拉手杆	1	Q235A/8.0	0.44	0.44	
12	GB/T 93-1987	弹性垫圈10	2		2.16	4.32	
11	GB/T 5783-2000	螺栓M10×20	2		23.05	46.1	
10	UKS	行程开关	1		0.09	0.09	外购件
9		开关支架	1	Q235A/2.0	0.11	0.11	
8	GB/T 6170-2000	螺母M12	2		16.52	33.04	
7		左右旋螺母	1		0.12	0.12	
6	OX188BT.3	短拉杆组件	1		0.50	0.5	

借(還)用件登記
旧底图总号
底图总号
签 字
日 期