
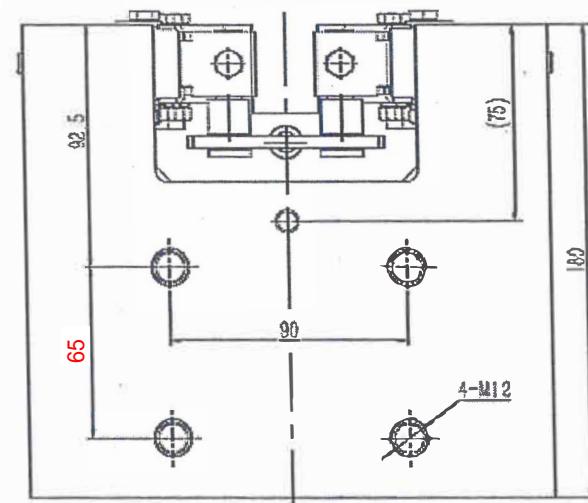
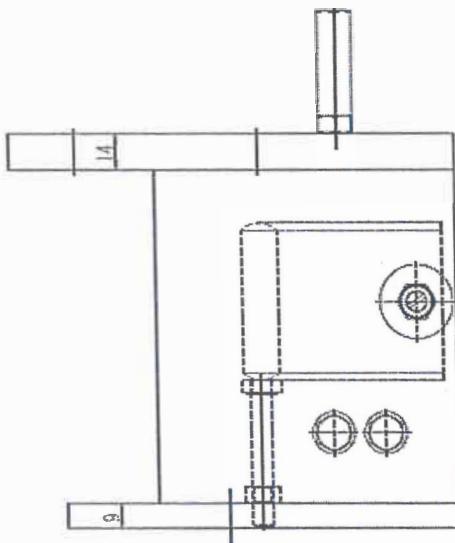


DXI883(GDS01)

基本尺寸	0~6	6~30	30~120	120~600	600~1000	1000~2000	2000~4000
公差	0.1	0.2	0.3	0.5	0.8	1.2	2.0

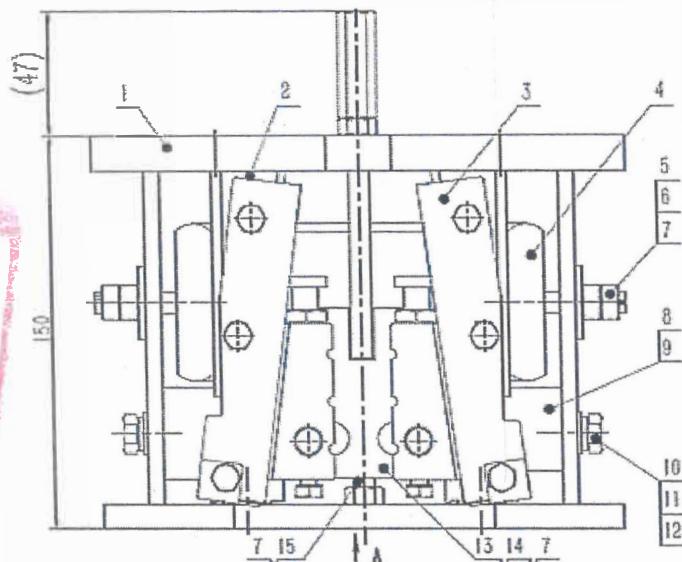

K202208039 ~ 048

本图适用于P+Q≤250kN·m,
按广东分册要求装机。
2018.1.2

The technical drawing illustrates a structural component with the following dimensions and features:

- Total width: $A = 205$
- Total height: $B = 110$
- Vertical distance from bottom to top horizontal line: $l = 90$
- Vertical distance from bottom to top horizontal line at left: $l_1 = 67$
- Bottom horizontal supports: 3 ± 0.5 on each side of a central vertical line.
- Central vertical line: t is the thickness of this line.
- Top horizontal supports: 3 ± 0.5 on each side of the central vertical line.
- Holes: There are four circular holes labeled "4-M16" located at the top edge, two holes labeled "M8" located on the right edge, and one hole labeled "M8" located on the left edge.

11	中華書局影印
12	中華書局影印
13	中華書局影印
14	中華書局影印
15	中華書局影印

15	GB/T 5780-2000	螺栓M8×50	1		0.03	6
14	0X186B-5	长螺母	1	冷拉六角钢	0.03	6
序号	代号	名称	数量	材料说明	重量	

13	QX188B.3	提拉组件	1		0.31	0.31	
12	GB/T 93-1987	弹性垫圈8	4		1.12	4.48	
11	GB/T 97.1-1985	平垫圈8	4		0.00	0	
10	GB/T15783-2000	螺栓M8×16	4		0.01	0.04	
9	QX188B-3	固定支架	1	Q235A/5.0	0.08	0.08	
8	QX188B-4	固定支架	1	Q235A/6.0	0.09	0.09	
7	GB/T 6170	蝶母M8	6		5.77	34.62	
6	GB/T 5287	特大垫圈8	2		0.01	0.02	
5	QX188B-2	双头螺杆	2	45#	0.02	0.04	借用
4	QX188B-1	U型板簧	1	60Si2MnA	1.44	1.44	
3	QX188B.2	右锻体组件	1		0.81	0.81	
2	QX188B.2	左锻体组件	1		0.81	0.81	
1	QX188B.1	锻体焊接件	1		6.95	6.95	
序号	代号	名称	数量	材料说明	重量	总重	备注

卷之三

宁波奥德普电器部件有限公司

渐进式安全钳

0X188B(GDS01)