

匹配安全钳：OX-188、OX-188A等

提拉形式：下置双提拉

技术条件：导轨顶面距离DBG≥850mm (可配236开关用户自理)

预紧提拉力建议值150N~200N(具体根据实际需要)


Mating safety gear: OX-188、OX-188A

Pulling form: underlying double pulling


Technical condition: rail guide top distance  $DBG \geq 850\text{mm}$

(236 switch applicable)

Advised pretension pulling force 150N~200N(depending on the actual needs)

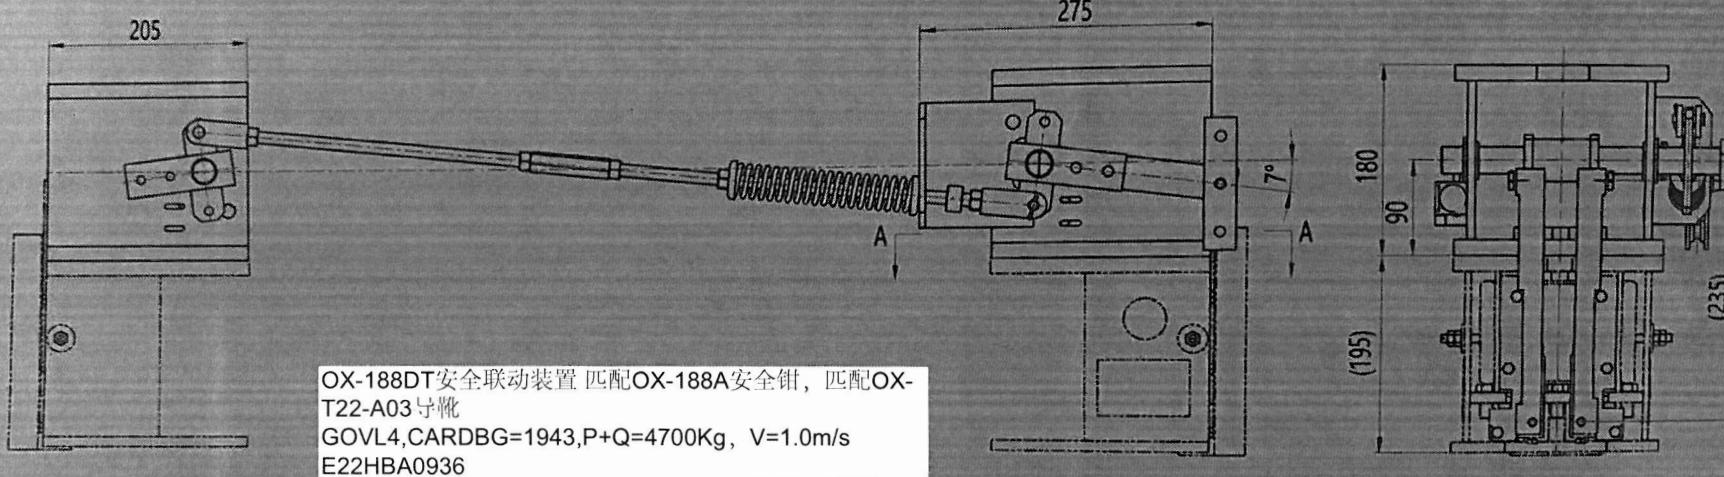

导轨面距DBG(建议参数DBG≥850)

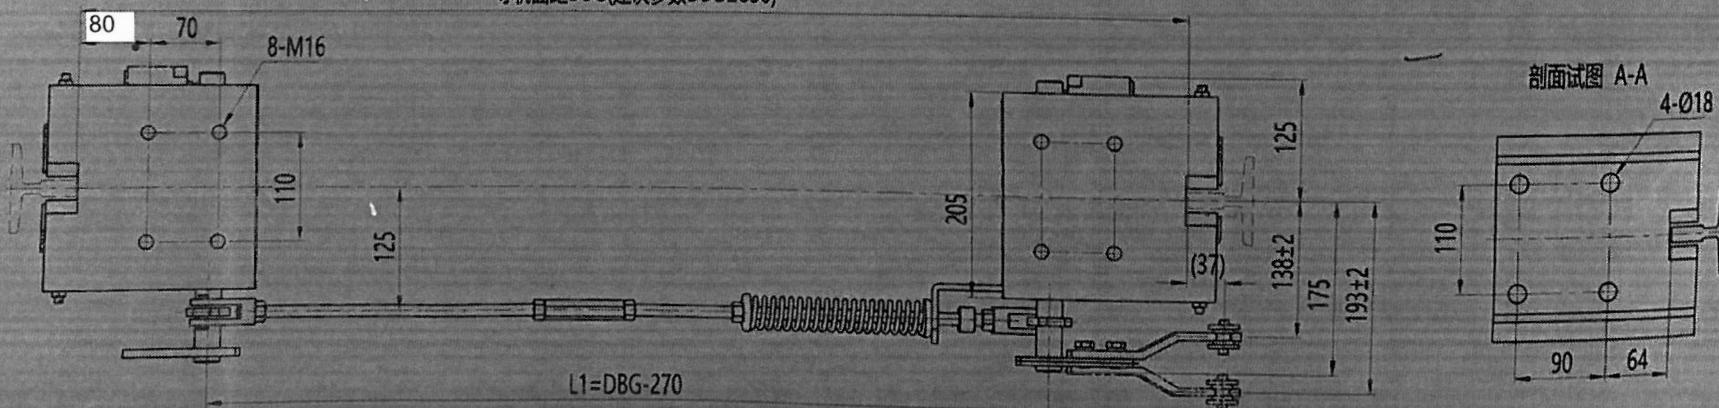

右置