




技术要求:

- 1、件1和件2装配后转动灵活无卡阻, 件2和件3装后牢固无松动;
- 2、参数A常规允许调整范围为343.5~407.5 (该值按配用T89导轨时计算, 其余值时该范围会略有变小, 该参数A≥315mm), 参数B常规允许调整范围为71~91 (绳轮正侧安装), 5~25 (绳轮反侧安装);
- 3、配重的使用根据指令要求, 标配为24KG重晶石; 匹配钢丝绳公称直径为Φ8。

标记	处数	分区	签名	日期	更改内容	标记	处数	分区	签名	日期	更改内容
标记	处数	PLACE	QUANTITY	DATE	CHANGE	标记	处数	PLACE	QUANTITY	DATE	CHANGE


 	   	  	2017.12.14	 	 	 
		 	OX-200(300)	 		

图号 图名	线性尺寸	0~6	6~30	30~120	20~40	400~1000	1000~2000	2000~4000	半径/高度尺寸	0.5~3	>3~6	>6~30	>30	短边尺寸	<10	>10~50	>50~120	>120~400	>400
	线性公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	倒圆/倒角公差	±0.2	±0.5	±1.0	±2.0	角度公差	±1°	±30'	±20'	±10'	±5'

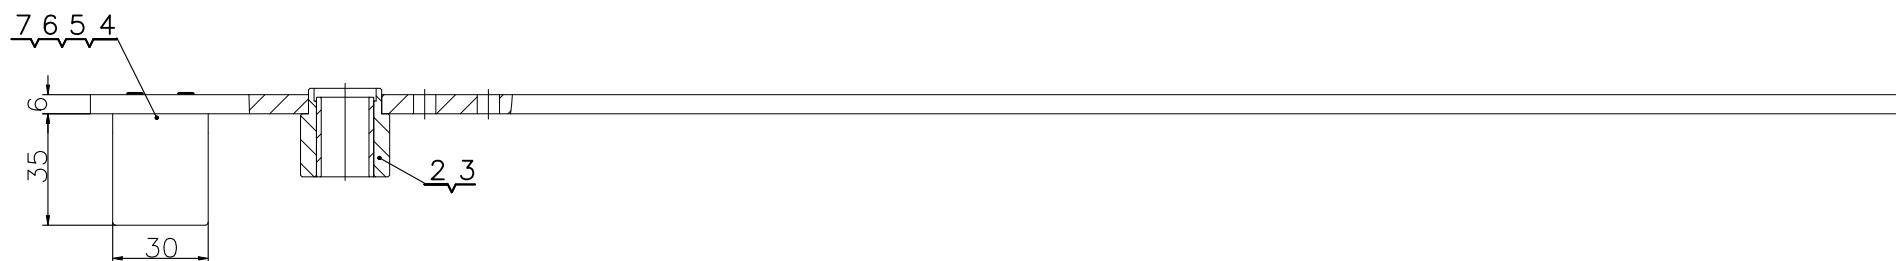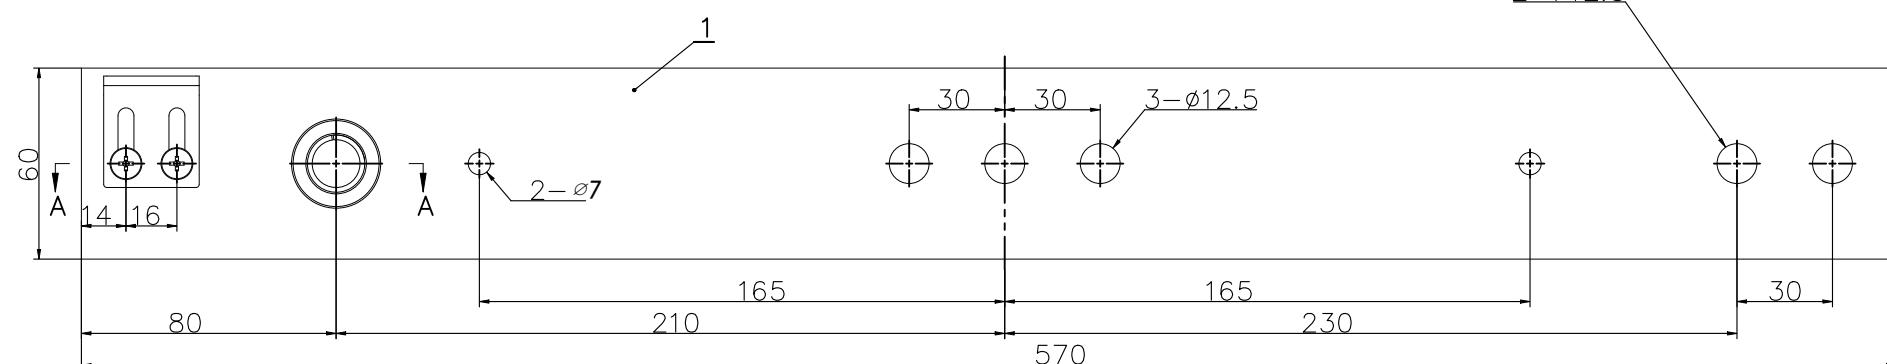

零件物料	颜色	识别号
40000145	RA15015蓝色	I01
40000146	RA16005本色	I02
40000147	RA17037灰色	I03

技术说明  
1. 件1与件2采用铆接，铆接时避免偏斜，松动等缺陷；  
2. 铆接后注意轴套内孔，避免影响后续轴承装配，装配后整体无窜动及转动等缺陷。

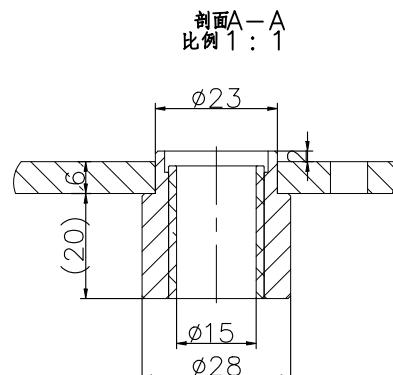



7	GB/T 818-2000 带螺钉M5×12	2		0.00	0	
6	GB/T 93-1988 弹性垫圈5	2		0.27	0.54	
5	GB/T 97.1-1988 垫圈5	2		0.44	0.88	
4	OX300A.3-2 开关打板	1	Q235A/3.0	0.04	0.04	
3	RU-1/181525 RU-1复合轴承	1		0.01	0.01	
2	OX200.2.1-2 轴套	1	45#钢	0.06	0.06	
1	OX200.2.1-1 摇杆杆件	1	Q235A/6.0×60.40	1.4		

宁波奥德普电梯部件有限公司

## 摇杆组件

0x200 2 1

借(通)用件登记
旧底图总号
底图总号
签字
日期

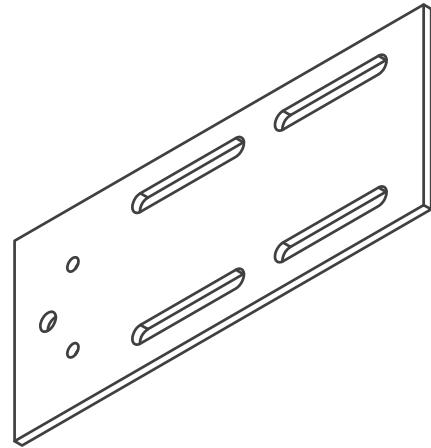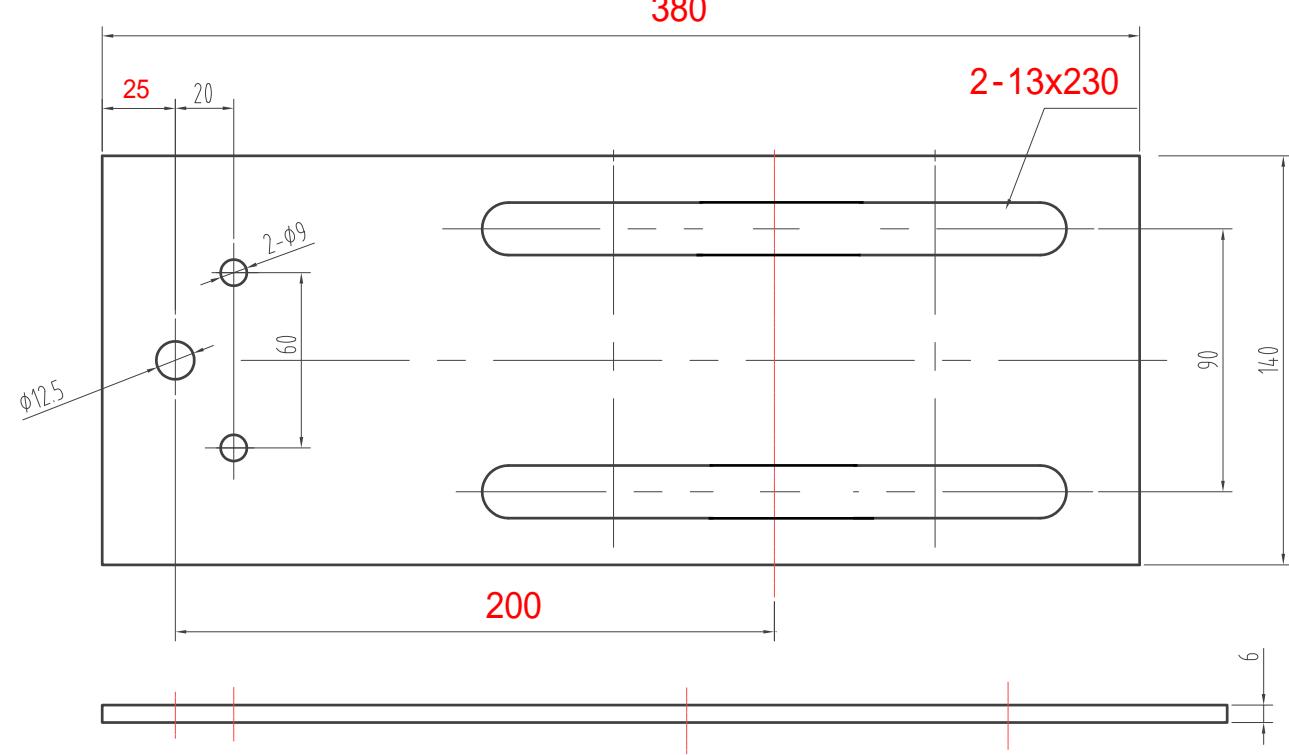


### 技术要求:

- 1、零件表面平整,无毛刺;
  - 2、表面喷涂色漆,颜色按烤漆颜色明细表执行;
  - 3、未注明公差按GB/T1184-K、GB/T1804-m执行。

标记	处数	分区 PLACE	签名 QUANTITY	日期 DATE	更改内容 CHANGE	标记	处数	分区 PLACE

常用 常用				宁波奥德普电梯部件有限公司				
保留 APPROVED	核准 DATE	2017.04.01	重量 WEIGHT	比例 SCALE	名称 TITLE	安装底板		
	制图 DRAWN	周正 04.01	1.94	1:2.5				
	设计 DESIGNED	于洪旭 04.01				图号 DRAWNO		
	审核 CHECKED							
			共 1 张 第 1 张			OX-200.1-1		版本 00

1804	线性尺寸	~	~	~	~	~	~	~	半径	高度	0.5-3	>3-6	>6-30	>30	短边尺寸	>10-50	50-120	120-400	>400
1804	线性公差	$\pm 0.1$	$\pm 0.2$	$\pm 0.3$	$\pm 0.5$	$\pm 0.8$	$\pm 1.2$	$\pm 2.0$	倒圆	倒角	$\pm 0.2$	$\pm 0.5$	$\pm 1.0$	$\pm 2.0$	角度公差	$\pm 1^\circ$	'	'	'

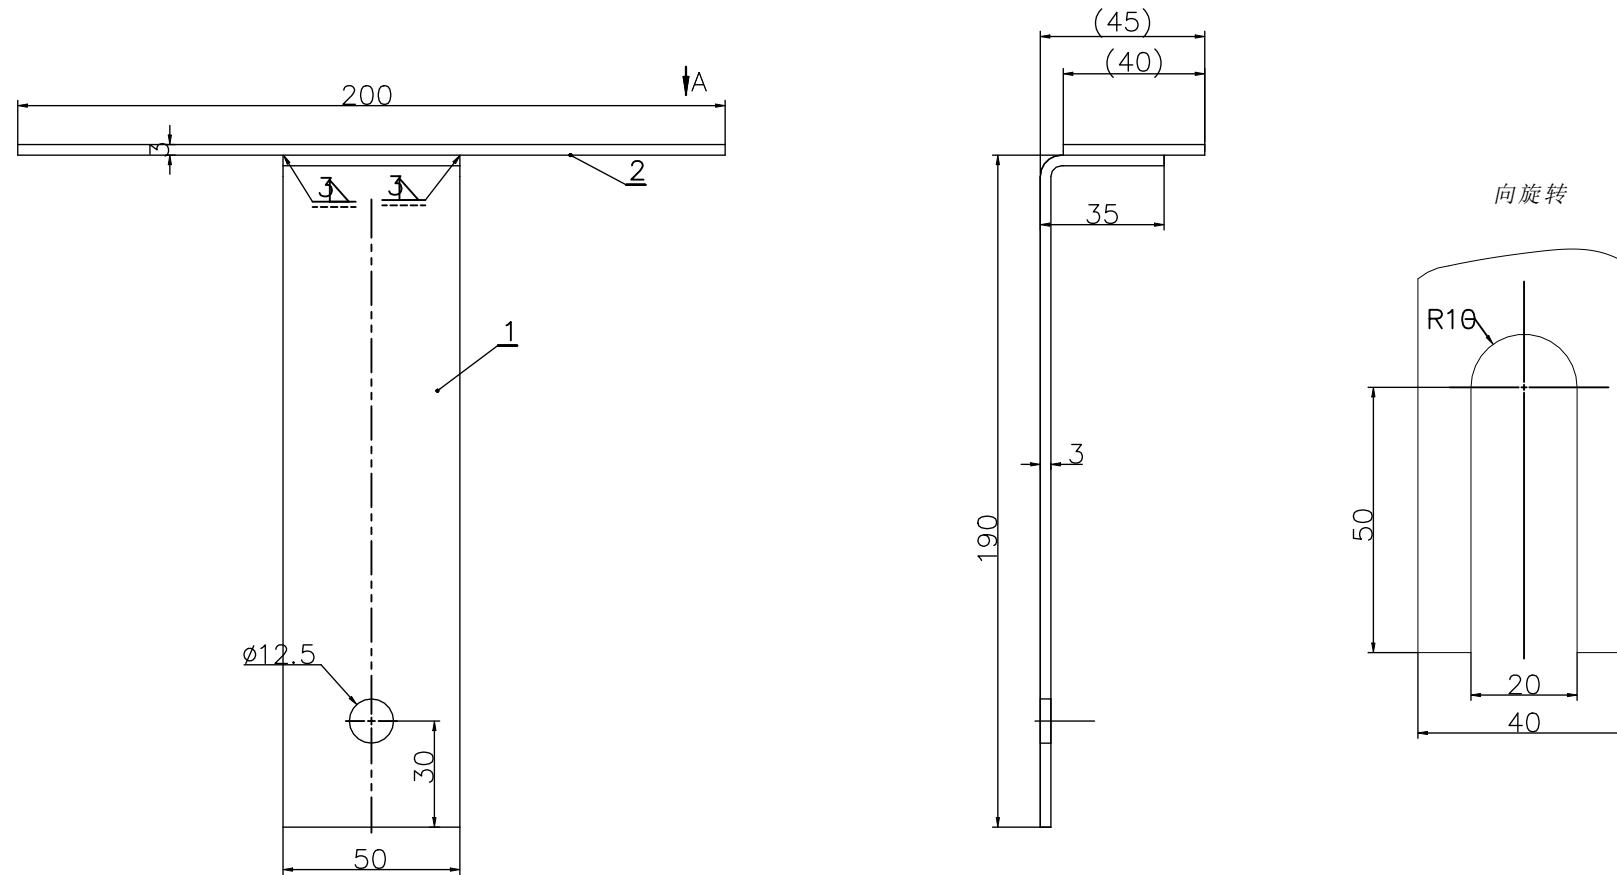

技术说明

本件采用电焊连接，焊接后确保平整无扭曲；表面喷漆颜色按公司标准要求，特殊按指定；本件可匹配及绳轮，根据表单确定

零件物料	零件物料	四氟垫片内 直径	参数01	参数02	颜色	识别号
20500106	30500108	240	170	100	RAL5015蓝色	DI01
	30500110	240			RAL6005本色	DI02
	30500112	240			RAL7037灰色	DI03
20500105	30500107	200	150	90	RAL5015蓝色	XI01
	30500109	200			RAL6005本色	XI02
	30500111	200			RAL7037灰色	XI03

2	OX200.2.3-2	护罩弯板			1	Q235B/3.0		0.15	0.15	
1	OX200.2.3-1	护板支架			1	Q235B/3.0		0.23	0.23	
序号	代号	名称			数量	材料说明		重量	总重	备注
						宁波奥德普电梯部件有限公司			护罩组件	
标记	处数	分	区	文件	更改	签名	年月日			
设计			标准化			阶段标记		重量	比例	
校对								0.38	2:3	
审核						物料编号: OX200.2.3				
工艺			批准							