
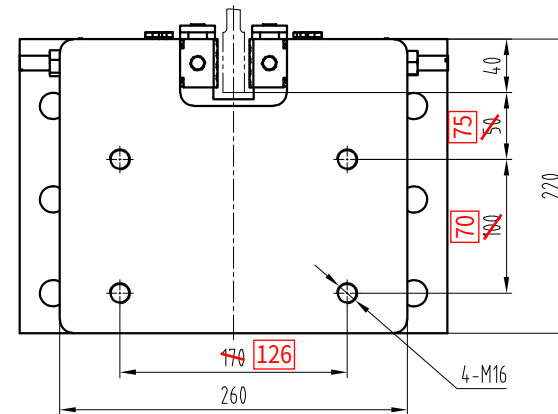


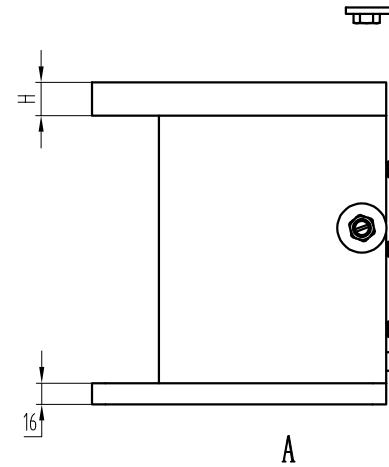

L	H
≤ 324	25
$325 < L \leq 360$	30
$361 < L \leq 400$	35

1 本安全钳适用于额定速度 $v \leq 1.75\text{m/s}$, $P+Q=6500 \sim 13000\text{kg}$, 导轨导向面宽度16mm、19mm的电梯(具体以型式试验报告为准)。