

编号:



奥德普安全钳OX-188采购附单

备注:

OX-188, 型号: A01, C=220, H=Φ 18

附图如下

OX-188渐进式安全钳
OX-188 Progressive Safety Gear

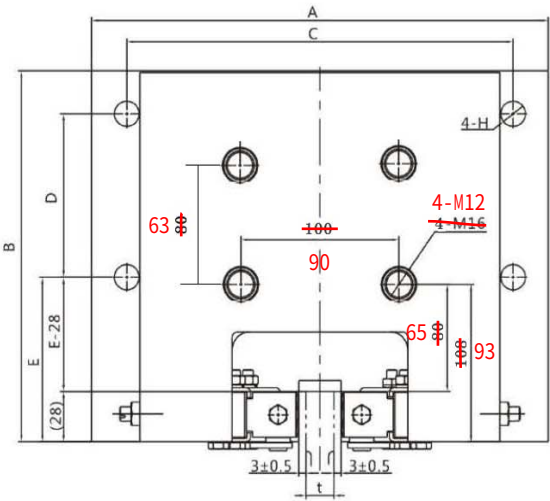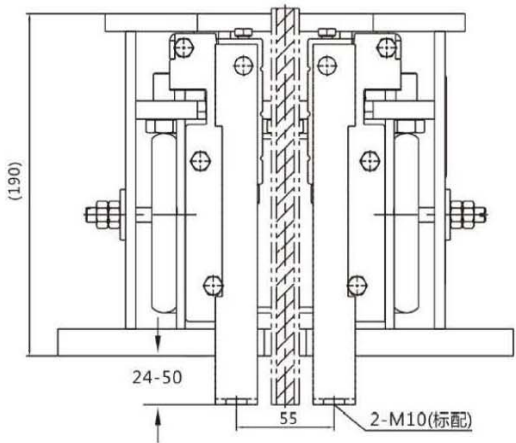

额定速度: $\leq 2.5\text{m/s}$
总允许系统质量: 809~5125kg
匹配导轨: 10mm, 15.88mm, 16mm(导轨导向面宽度)
结构形式: U型板簧、双活动模块
提拉形式: 双提拉 (标配M10, 可选M8)
执行标准: GB7588-2003、EN81-1:1998
安装位置: 轿厢侧、对重侧

型号 Type	A	B	C	D	E	H	匹配导轨 Match the guide shoe
A01	260	206	220	90	92	Φ18	OX-029
A02	206		110			M16	

Rated speed: $\leq 2.5\text{m/s}$
Total permit system quality: 809~5125kg
Matching guide rail: 10mm, 15.88mm, 16mm(guide rail width)
Structure form: U-type plate spring, double moving wedge
Pulling form: double pulling (standard M10, optional M8)
Performance standard: GB7588-2003、EN81-1:1998
Installation position: car side, counterweight side

注: 上述为标准产品, 如匹配导轨孔位尺寸变化请按此形式注明: OX-188(A01/63-70×110-M16)(以OX-188(A01)匹配我司OX-02导轨为例的表达形式)

Remarks: The above are standard products, please note in the following form if matching guide shoe size change: OX-188 (A01/63-70×110-M16) (example based on OX-188 (A01) match with our OX-02 guide shoe)