

编号:

奥德普安全钳OX-188采购附单



备注:

OX-188, 型号: A01, C=220, H=Φ 18

附图如下

OX-188渐进式安全钳
OX-188 Progressive Safety Gear

EAC CE 1128

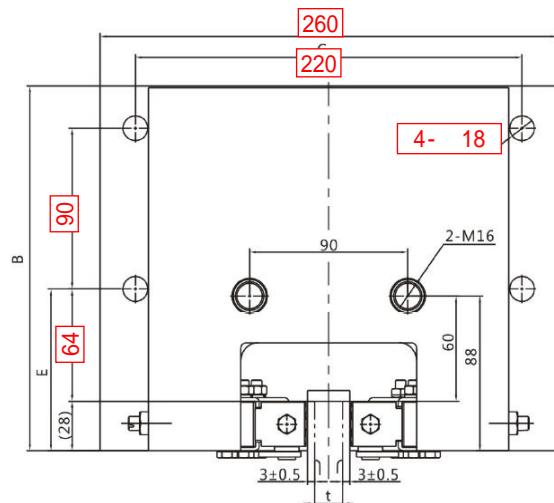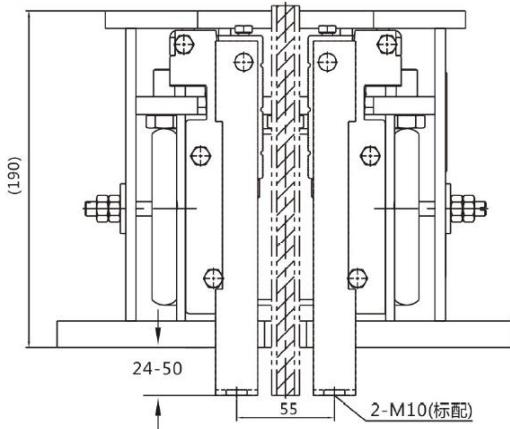

额定速度 : ≤2.5m/s

总允许系统质量 : 809~5125kg

匹配导轨: 10mm、15.88mm、16mm(导轨导向面宽度)

结构形式: U型板簧、双活动楔块

提拉形式: 双提拉 (标配M10, 可选M8)

执行标准: GB7588-2003、EN81-1:1998

安装位置: 轿厢侧、对重侧

Rated speed: ≤2.5m/s

Total permit system quality: 809~5125kg

Matching guide rail: 10mm, 15.88mm, 16mm(guide rail width)

Structure form: U-type plate spring, double moving wedge

Pulling form: double pulling (standard M10, optional M8)

Performance standard: GB7588-2003, EN81-1:1998

Installation position: car side, counterweight side

注: 上述为标准产品, 如匹配导靴孔位尺寸变化请按此形式注明: OX-188(A01/63-70×110-M16) (以OX-188(A01)匹配我司OX-02导靴为例的表达形式)

Remarks: The above are standard products, please note in the following form if matching guide shoe size change: OX - 188 (A01/63-70 x 110 - M16)
(example based on OX-188 (A01) match with our OX-02 guide shoe)

型号 Type	A	B	C	D	E	H	匹配导靴 Match the guide shoe	
							Φ18	OX-029
A01	260	206	220	90	92	Φ18		
A02	206		110			M16		