



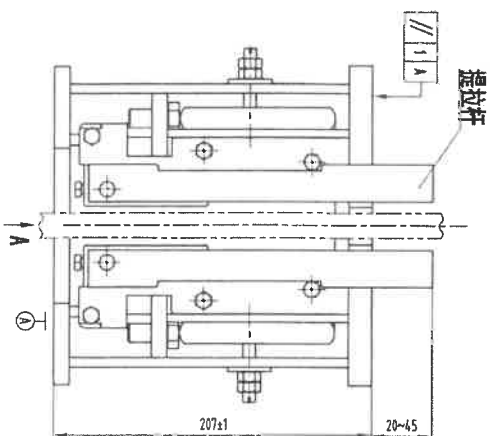

导靴安装面
A $\curvearrowright$ 180°

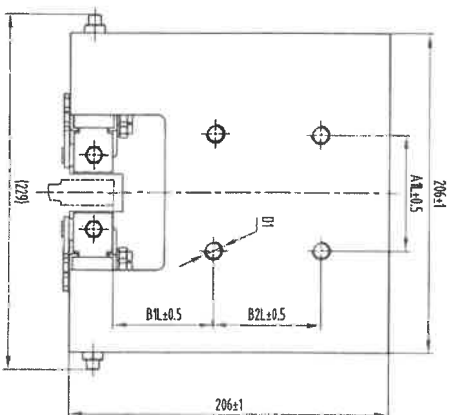

材料名称	材料规格	数量(吨)	单位	K	ALL	BILL	BZL	D1
1723682ABV001	AX188A0D59F	4400-Q-10C-200	4200-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16
1723682ABV002	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV003	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV004	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV005	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV006	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV007	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV008	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV009	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV010	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV011	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV012	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV013	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV014	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75
1723682ABV015	AX188A0D59F	4400-Q-10C-1400	4400-Q-10C-600	4600-Q-10C-800	4800-Q-10C-500	0.25W±2.5	16	75


D-5000

滿足新型規 + 新控規，因執取示

技术要求

- [illegible]

参数名	中文描述
h (mm)	号钢号钢厚度
V (m/s)	测定速度

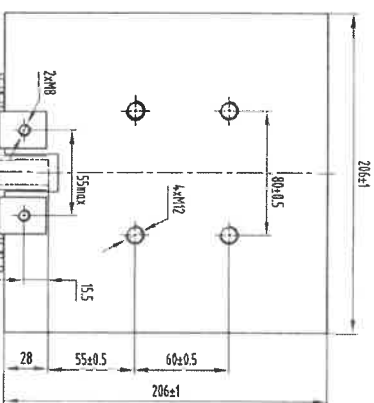

						 宁波奥德普电梯部件有限公司 NINGBO ADEPU ELEVATOR COMPONENTS CO., LTD.	
标记/页数	更改内容	签名	日期				
设计	21.8.21 标准化			阶段	标记	重量	比例
审核	202.8.20						1:3
工艺	批准	202.8.20	202.8.20	共 1 张 第 1 页			



宁波奥德普电梯部件有限公司
NINGBO AODEPU ELEVATOR COMPONENTS CO., LTD.

安全錯

AX188A013