
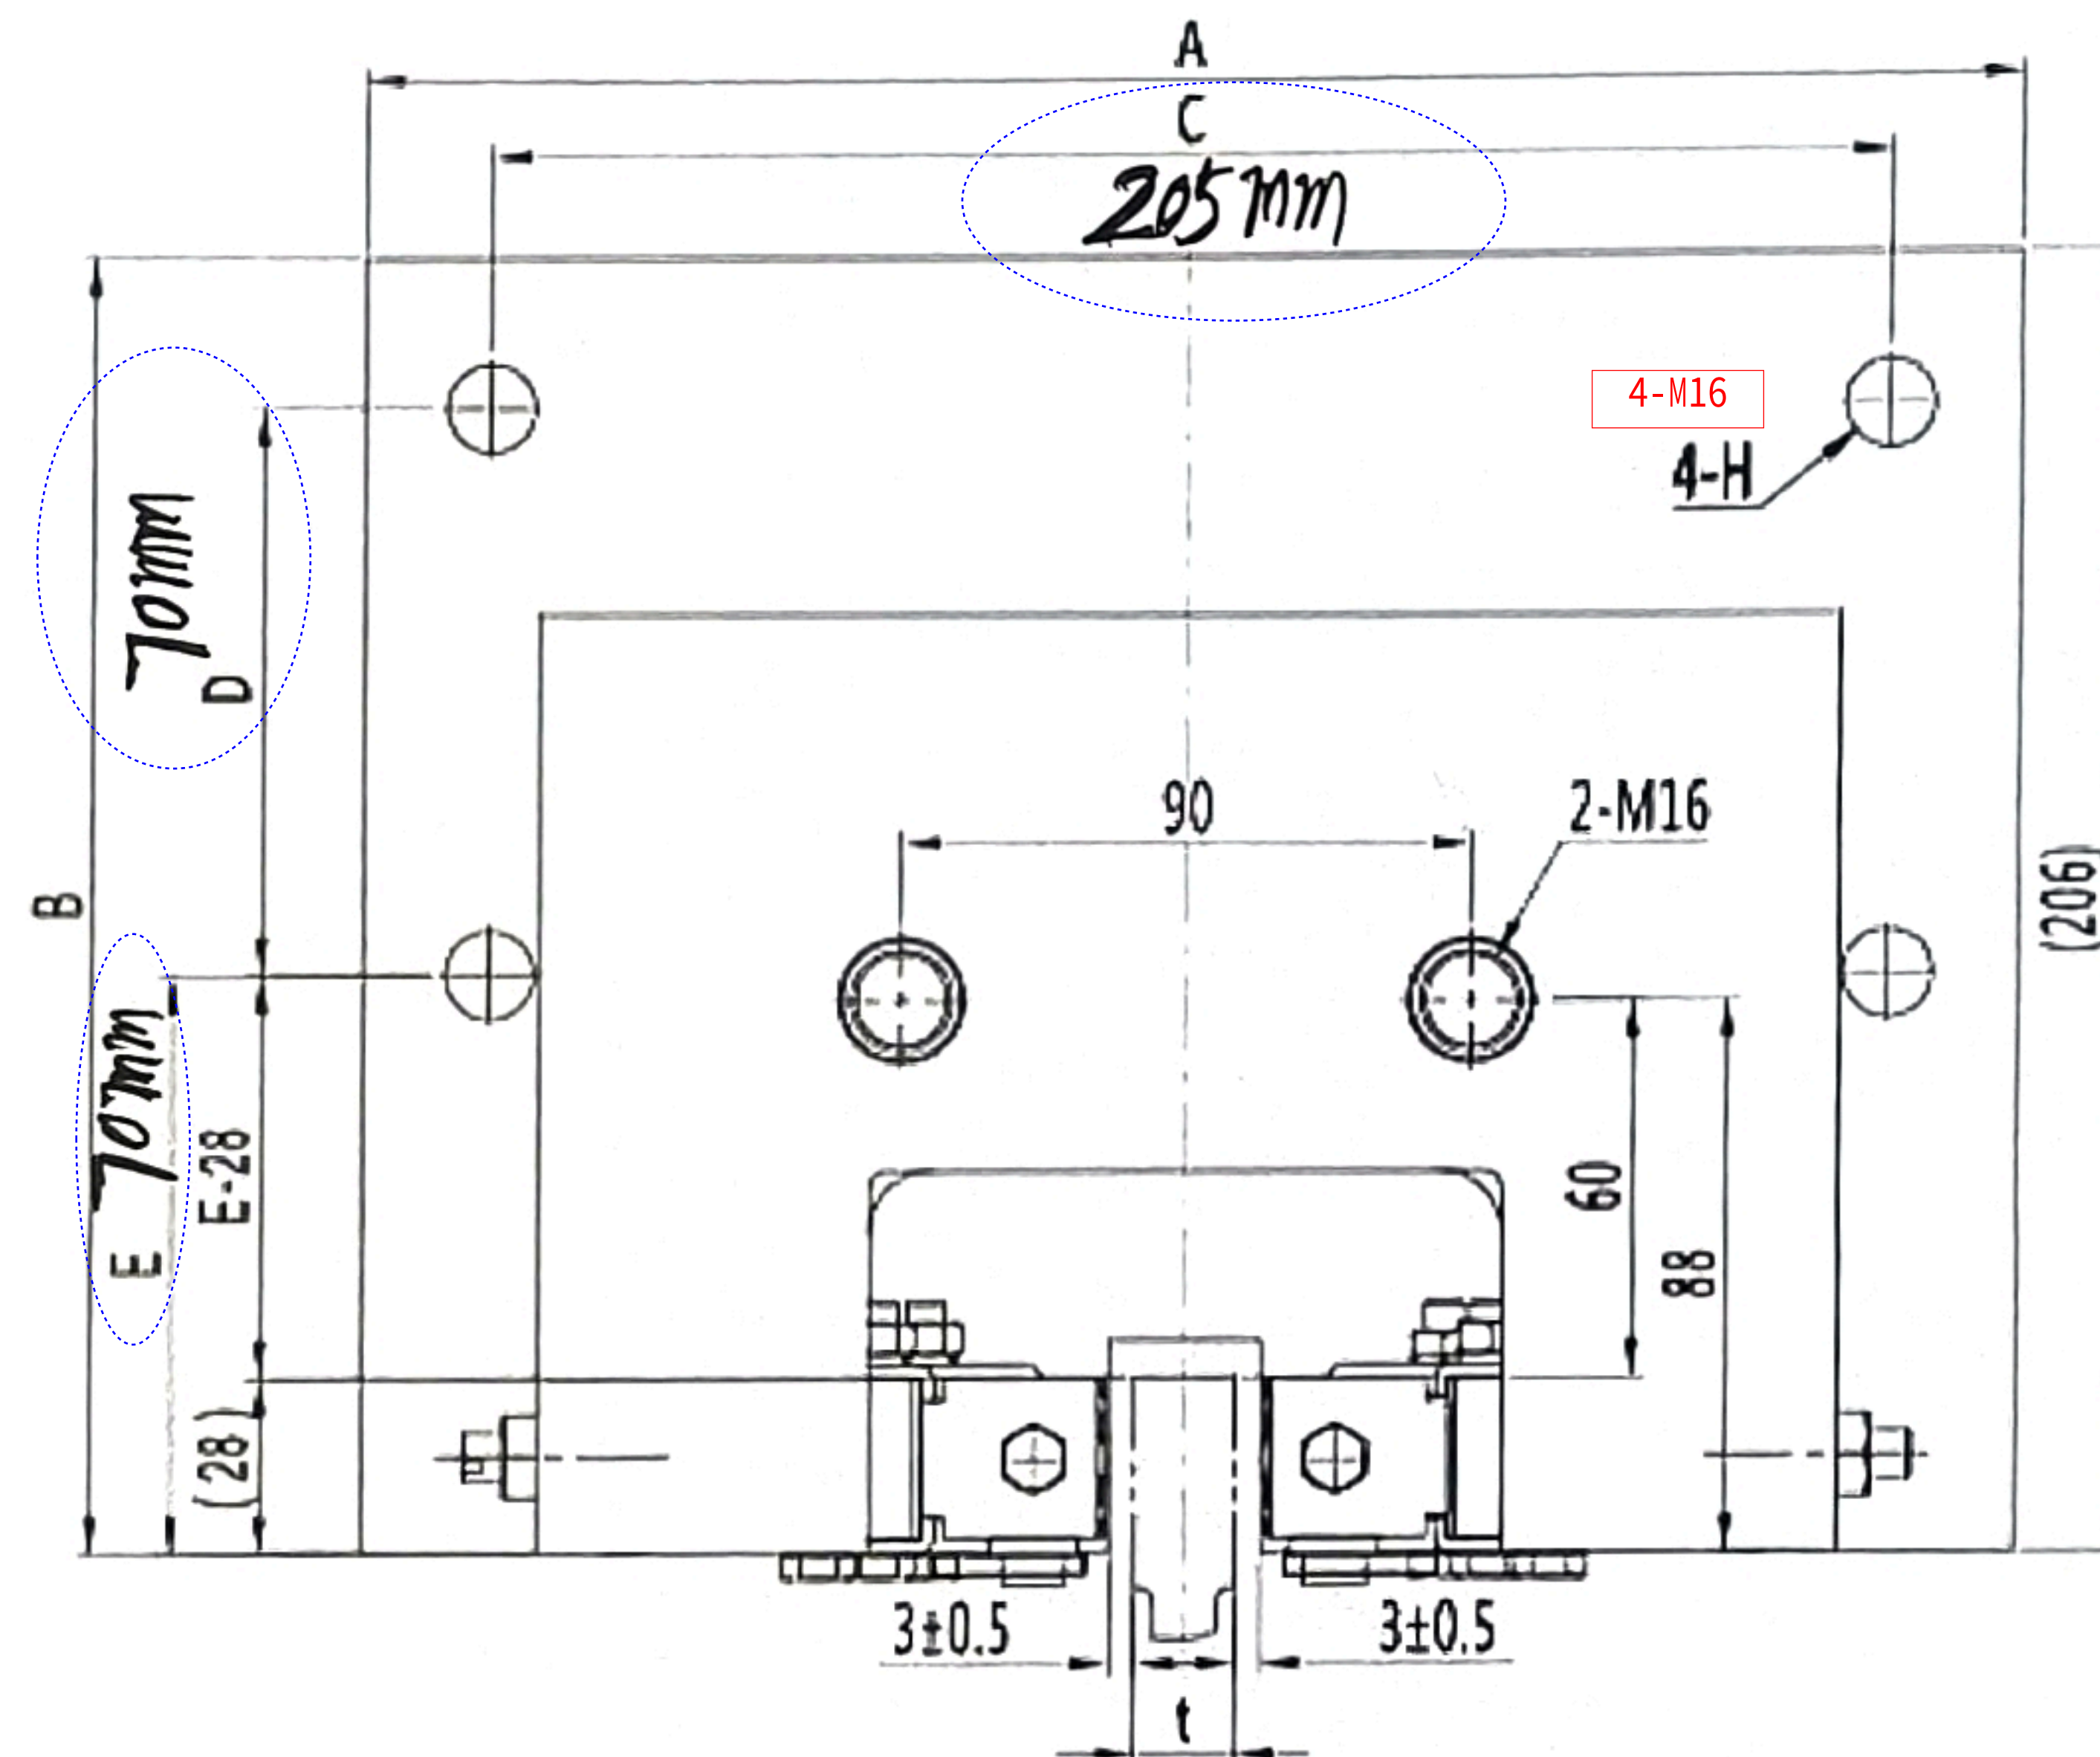


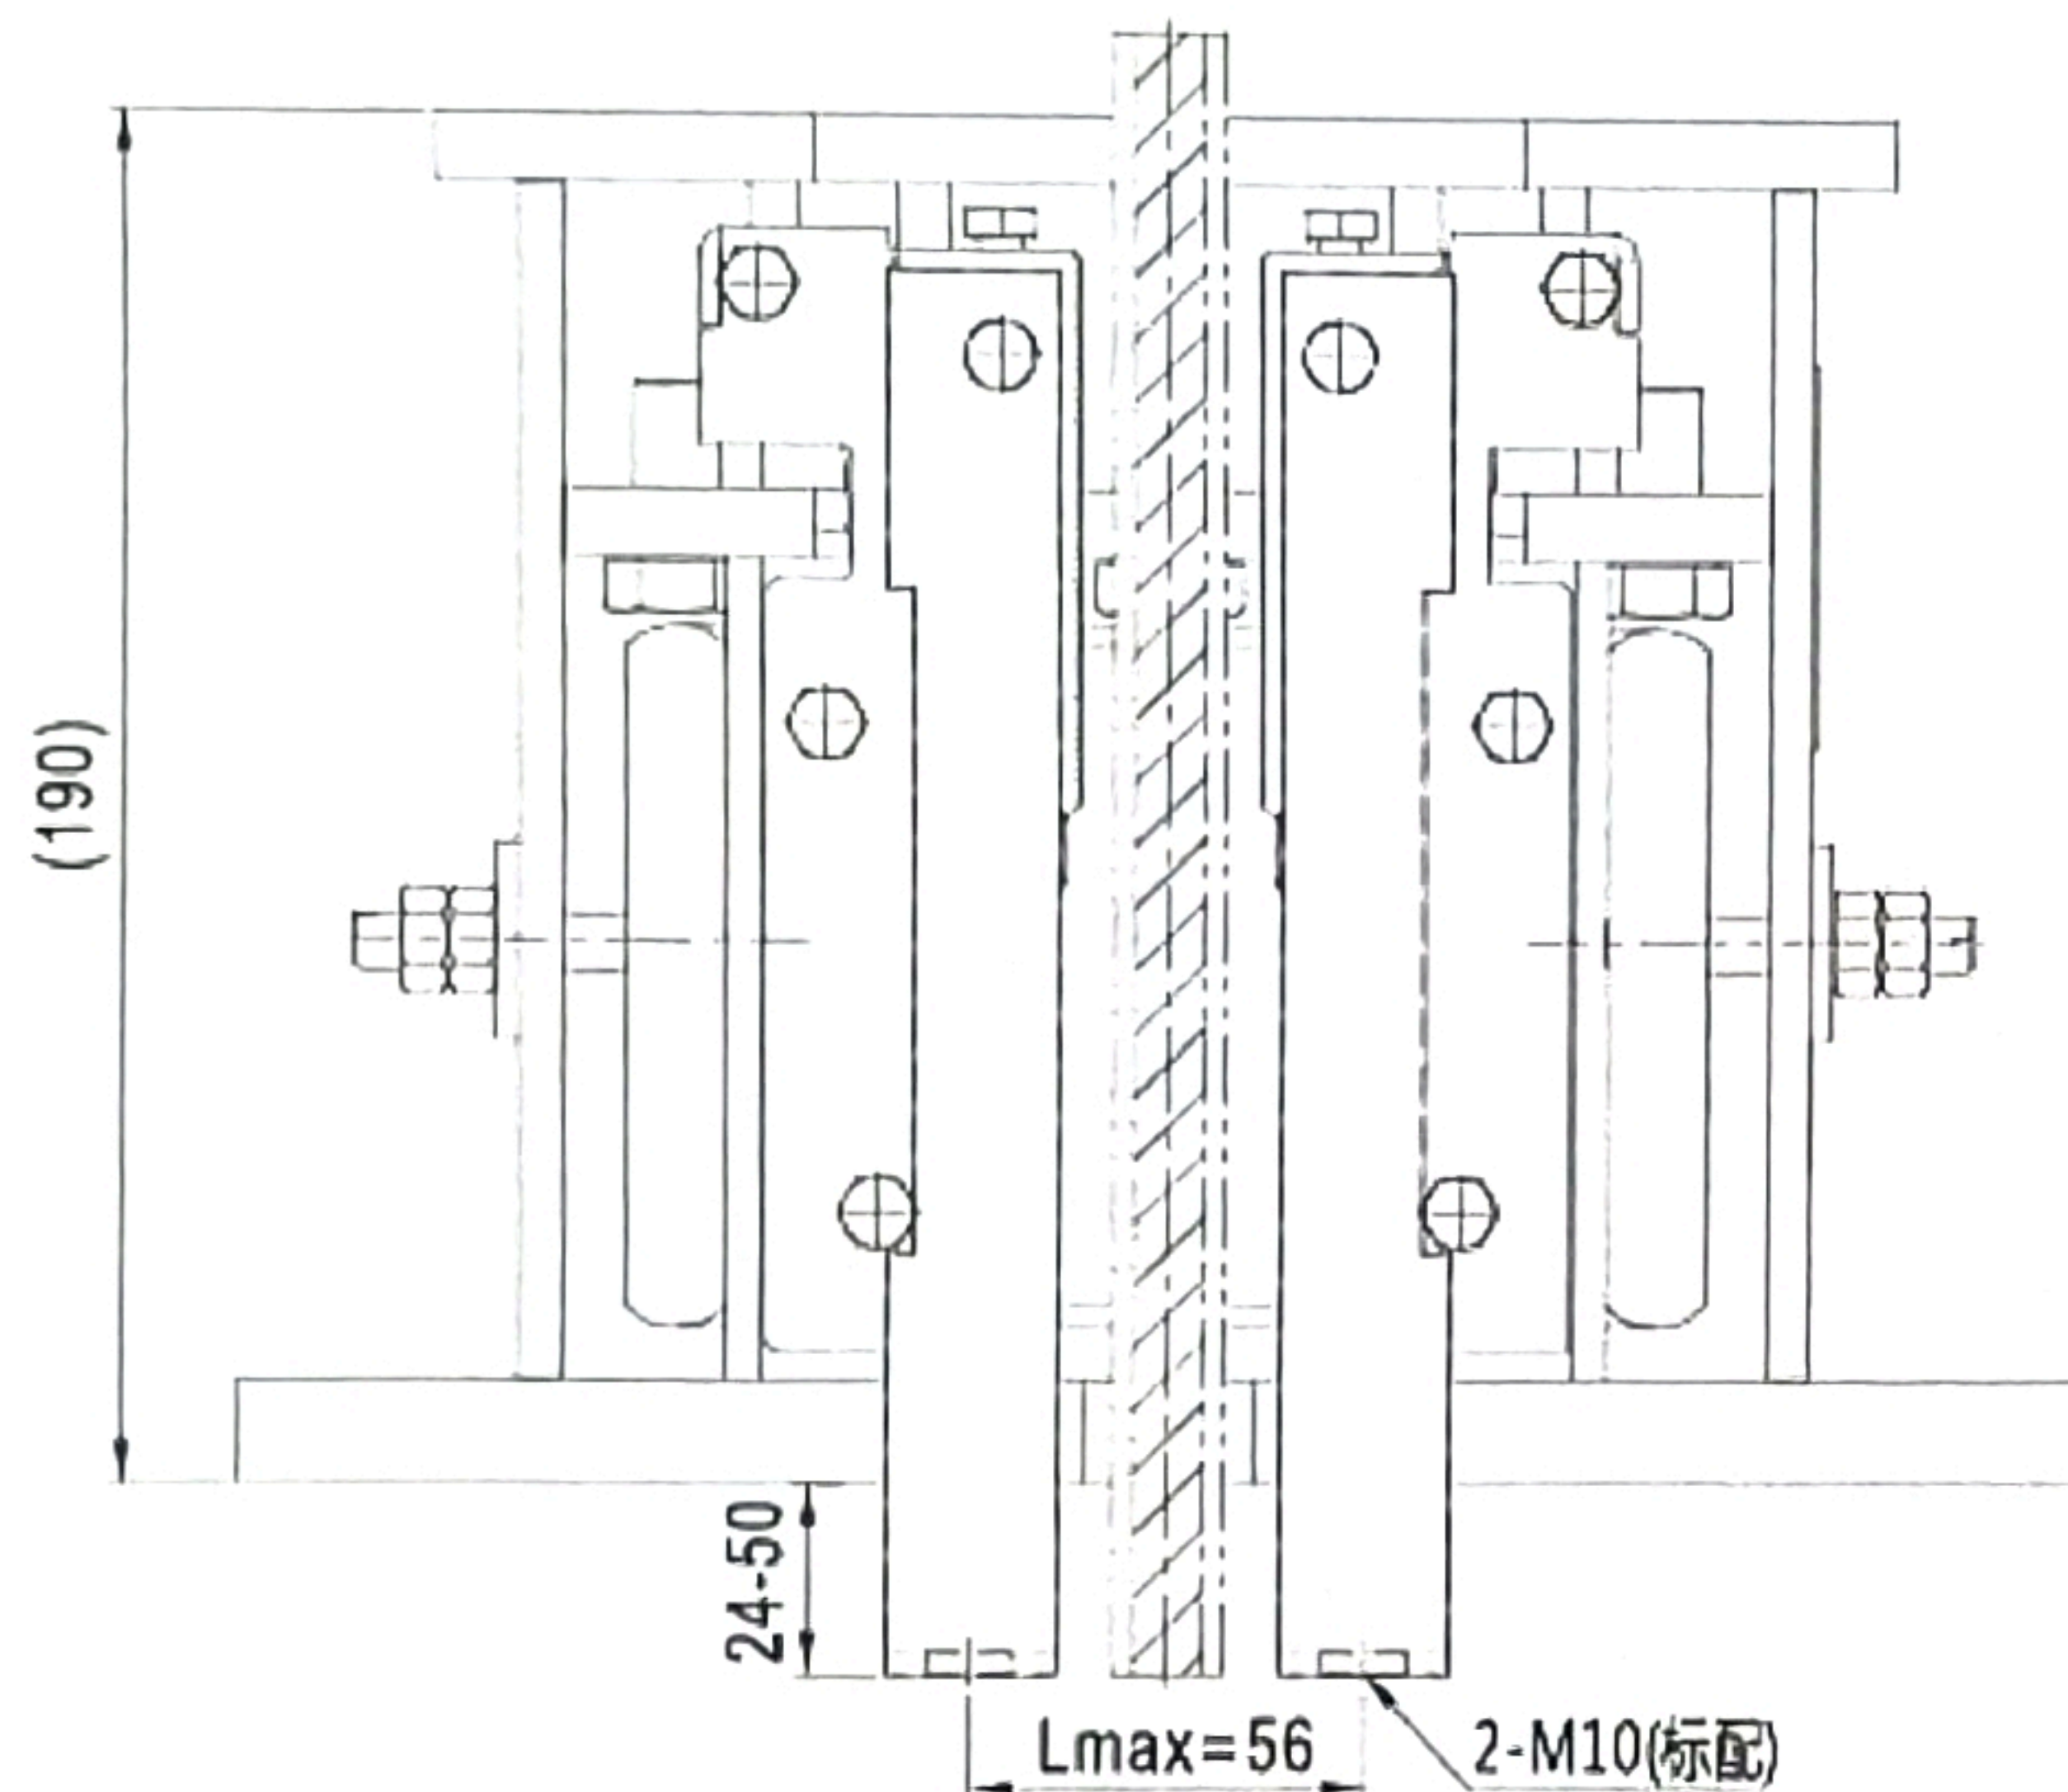

额定速度： $\leq 2.5\text{m/s}$

总允许系统质量：1000~4000kg

匹配导轨： $\leq 16\text{mm}$ (导轨导向面宽度)

结构形式：U型板簧、双活动楔块

提拉形式：双提拉(标配M10, 可选M8)

安装位置：轿厢侧、对重侧

Rated speed: $\leq 2.5\text{m/s}$

Total permit system quality: 1000~4000kg

Matching guide rail: $\leq 16\text{mm}$ (guide rail width)

Structure form: U-type plate spring、double moving wedge

Pulling form: double pulling (standard M10、optional M8)

Installation position :car side、counterweight side

注：上述为标准产品，如匹配导轨孔位尺寸变化请按此形式注明:OX-188(A01/63-70×110-M16)(以OX-188(A01)匹配我司OX-029导轨为例的表达形式)

Remarks: The above are standard products, please note in the following form if matching guide shoe size change: OX - 188 (A01/63-70 x 110 - M16) (example based on OX-188 (A01) match with our OX-029 guide shoe)