


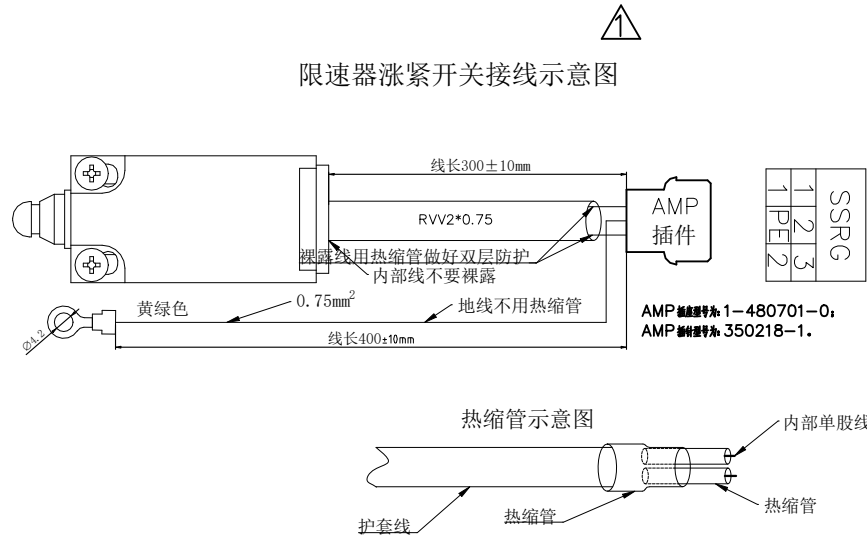
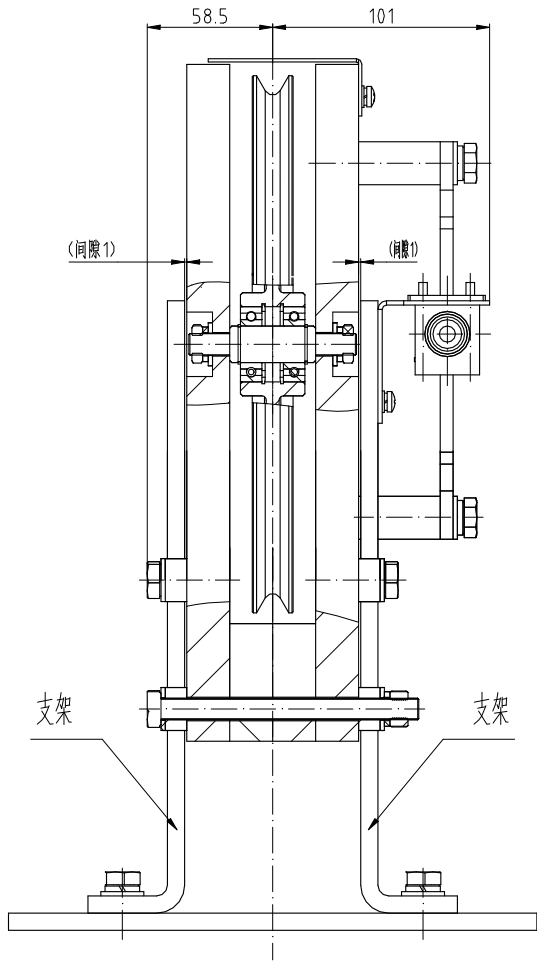


ALL DIMENSIONS METRIC

A3		LENGTH/ DIAMETER	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000	RADIUS/ CHAMFER	0.5-3	>3-6	>6	ANGLE (shorter side length)	0-10	>10-50	>50-120	>120-400	>400	Z = LEG LENGTH ANSI/AWS A2.4-98 WELDING SYMBOLS ARE USED ON THIS DRAWING. REFER TO DRAWING AAA26ADJ FOR CONVERSION TO ISO SYMBOLS. OTHER SIDEARROW SIDE 	
		TOLERANCE	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	TOLERANCE	± 0.2	± 0.5	± 1	TOLERANCE	± 1°	± 0.5°	± 0.3°	± 0.15°	± 0.1°		

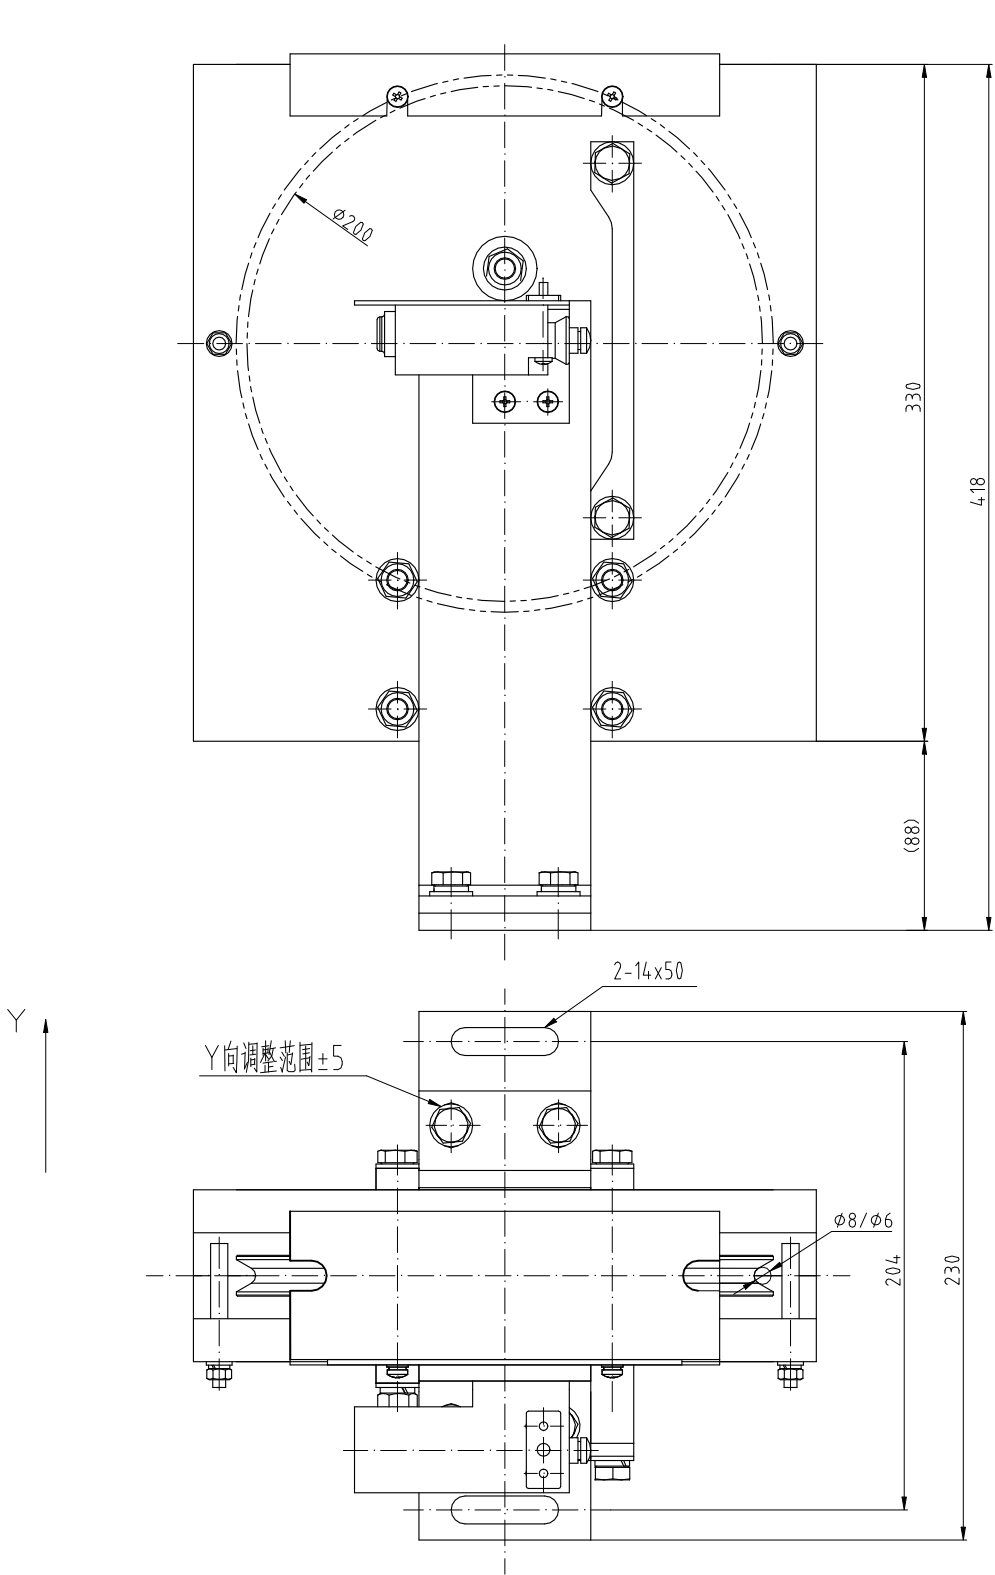

技术说明:

- 绳轮节径为 $\phi 200$ ，匹配绳槽为 $\phi 6$ ；
- 钢板重块组件部分总重为 $39\pm 1\text{kg}$ ；
- 行程开关防护等级为IP67；
- 重块部分安装后需保证可沿左、右支架上下灵活滑动。
- 适用于提升高度 $\leq 100\text{m}$ 。

型号:OX-300HA

件号	钢丝绳直径
VKS6H042001/V24N030823	$\phi 6$

						Volkslift Schindler		张紧装置	VKS6H042		
						绘图 DRAWN	陈小凯	材料: 组装件	首次下发版本	重 量	比 例
	增加接线图	20240918	闵传宏	孙云凯	24901	校对 CHK	闵传宏		FIRST VERSION	WEIGHT	PROPORTION
						批准 APPD	陈国芳		22301		1:3.5
标记 MARK	更改原因及说明	更改日期 CHANGE DATE	更改 CHANGE	审查 CHECK	版本 VERSION	日期 DATE	2022.4.12		MATERIAL:	SHEETS 1	1