


A3		尺寸 (mm)							粗糙度	角度 (短边)			公差					焊接	
		0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000		0.5-3	>3-6	>6	0-10	>10-50	>50-120	>120-400	>400		
		公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2		公差	±0.2	±0.5	±1	公差	±°	±0.5°	±1.3°	±1.5°	±0.1°

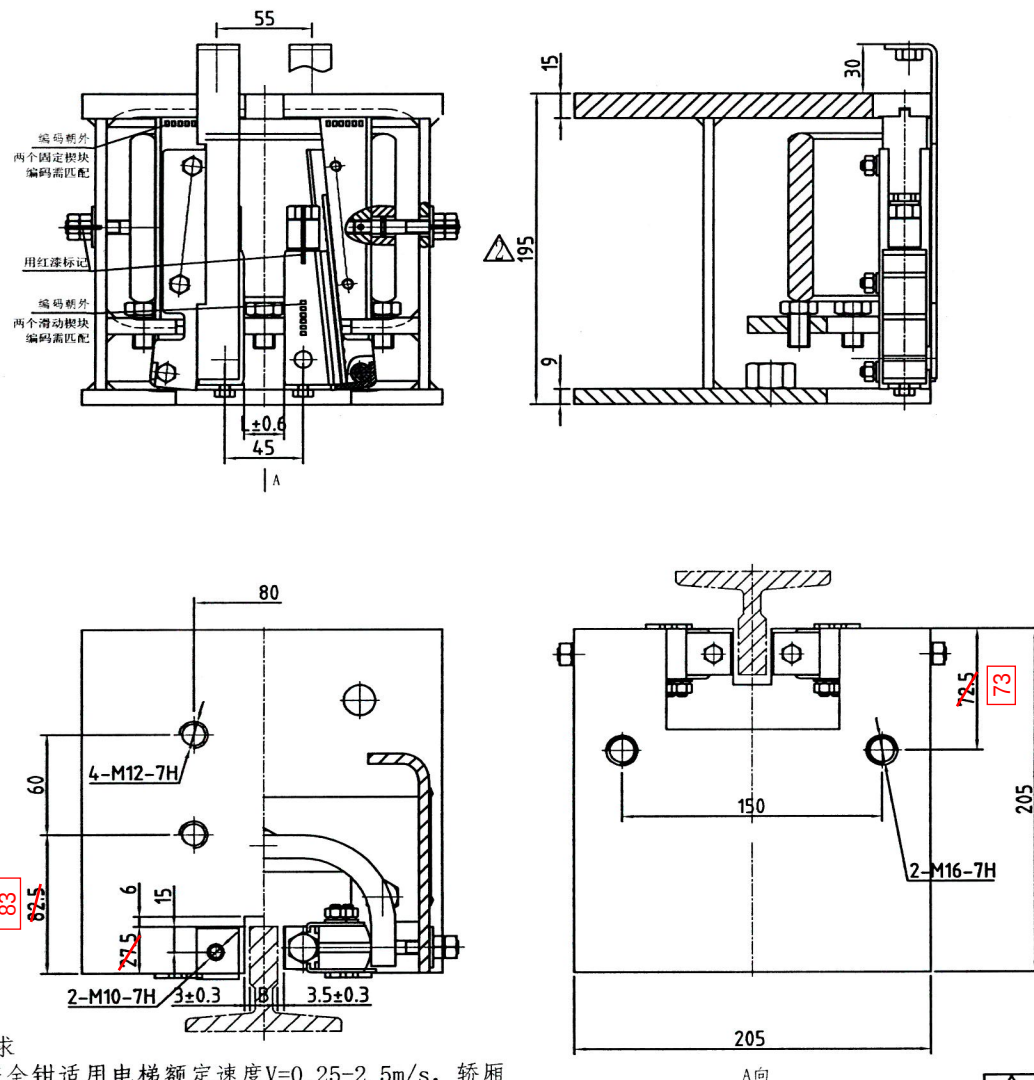

技术要求

1. 本安全钳适用电梯额定速度 $V=0.25-2.5\text{m/s}$,轿厢自重与额定总载荷 $(P+Q)$ 为 $1000-4000\text{kg}$,实际应用总质量范围不应超过允许质量 $\pm 7.5\%$;
2. 本安全钳适用导轨硬度 $< \text{HB}143$,导轨工作面宽度 $B=10、15.88、16\text{mm}$,且导轨表面的防锈油务必用合适的清洁剂加以清除干净;
3. 固定楔块与钳体之间的运动面涂L-HM46抗磨液压油;
4. 装配时两滑动楔块摩擦面间距的中心面与钳体凹槽的中心面偏差 < 0.2 ;
5. 两滑动楔块最大行程 69mm .

件号	额定速度	总容许质量 $(P+Q)$	导轨状况	导轨面工作宽度	型号
P/N	m/s	Kg		B(mm)	
MSA3H506-001	$0.25 < V \leq 2.5$	$1200 < P+Q \leq 3000$	润滑	15.88	
99.PMSA3H506-001/非标号	$0.25 < V \leq 2.5$	$1200 < P+Q \leq 3000$	润滑	10	
MSA3H506-003	$0.25 < V \leq 2.5$	$3600 < P+Q \leq 4000$	润滑	15.88	
MSA3H506-004	$0.25 < V \leq 2.5$	$4200 < P+Q \leq 4400$	润滑	15.88	
MSA3H506-005	$0.25 < V \leq 2.5$	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-006	$0.25 < V \leq 2.5$	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-007	$0.25 < V \leq 2.5$	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-008	$0.25 < V \leq 2.5$	$4200 < P+Q \leq 4400$	润滑	16	
MSA3H506-009	2	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-010	2	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-011	2	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-012	2	$4200 < P+Q \leq 4400$	润滑	16	
MSA3H506-013	2.5	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-014	2.5	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-015	2.5	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-016	2.5	$4200 < P+Q \leq 4400$	润滑	16	
MSA3H506-017	1	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-018	1	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-019	1	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-020	1	$4200 < P+Q \leq 4400$	润滑	16	
MSA3H506-021	1.5	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-022	1.5	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-023	1.5	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-024	1.5	$4200 < P+Q \leq 4400$	润滑	16	
MSA3H506-025	1.75	$1200 < P+Q \leq 3000$	润滑	16	
MSA3H506-026	1.75	$3000 < P+Q \leq 3600$	润滑	16	
MSA3H506-027	1.75	$3600 < P+Q \leq 4000$	润滑	16	
MSA3H506-028	1.75	$4200 < P+Q \leq 4400$	润滑	16	

导轨面宽10mm, 导靴安装孔距非标

用于设备号: 25MLJS51760

设计	韩伟良	20170810	标准化			阶段标记	重量	比例	安全钳
标记	处数	分区	更改文件号	签名	年月日	-	-	-	MSA3H506
设计	韩伟良	20170810	标准化			-	-	-	
校对	杨涛	20170810				-	-	-	
审核						-	-	-	
工艺						-	-	-	
批准	沈福	20170810				-	-	-	

宁波奥德普



安全钳

MSA3H506

共 1 张 第 1 张