

\$XN2619D1-K26-0285

DX200





珠影集

宁波奥德普电子元件有限公司


卷之三

電纜重量	電纜規格	導體材質	使用數量	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	X	Y	Z
12KG			2	285	45	85	≤50m																	
16KG			2	250	50	105	≤50~100m																	
24KG			2	250	50	105	≤50~100m																	
32KG			2	265	85	165	≤50~100m																	
40KG			2	265	85	165	≤50m																	
48KG			2	265	85	165	≤50m																	
56KG			2	265	85	165	≤50m																	
64KG			2	265	85	165	≤50m																	
72KG			2	265	85	165	≤50m																	
80KG			2	265	85	165	≤50m																	
88KG			2	265	85	165	≤50m																	
96KG			2	265	85	165	≤50m																	
104KG			2	265	85	165	≤50m																	
112KG			2	265	85	165	≤50m																	
120KG			2	265	85	165	≤50m																	
128KG			2	265	85	165	≤50m																	
136KG			2	265	85	165	≤50m																	
144KG			2	265	85	165	≤50m																	
152KG			2	265	85	165	≤50m																	
160KG			2	265	85	165	≤50m																	
168KG			2	265	85	165	≤50m																	
176KG			2	265	85	165	≤50m																	
184KG			2	265	85	165	≤50m																	
192KG			2	265	85	165	≤50m																	
200KG			2	265	85	165	≤50m																	
208KG			2	265	85	165	≤50m																	
216KG			2	265	85	165	≤50m																	
224KG			2	265	85	165	≤50m																	
232KG			2	265	85	165	≤50m																	
240KG			2	265	85	165	≤50m																	
248KG			2	265	85	165	≤50m																	
256KG			2	265	85	165	≤50m																	
264KG			2	265	85	165	≤50m																	
272KG			2	265	85	165	≤50m																	
280KG			2	265	85	165	≤50m																	
288KG			2	265	85	165	≤50m																	
296KG			2	265	85	165	≤50m																	
304KG			2	265	85	165	≤50m																	
312KG			2	265	85	165	≤50m																	
320KG			2	265	85	165	≤50m																	
328KG			2	265	85	165	≤50m																	
336KG			2	265	85	165	≤50m																	
344KG			2	265	85	165	≤50m																	
352KG			2	265	85	165	≤50m																	
360KG			2	265	85	165	≤50m																	
368KG			2	265	85	165	≤50m																	
376KG			2	265	85	165	≤50m																	
384KG			2	265	85	165	≤50m																	
392KG			2	265	85	165	≤50m																	
400KG			2	265	85	165	≤50m																	
408KG			2	265	85	165	≤50m																	
416KG			2	265	85	165	≤50m																	
424KG			2	265	85	165	≤50m																	
432KG			2	265	85	165	≤50m																	
440KG			2	265	85	165	≤50m																	
448KG			2	265	85	165	≤50m																	
456KG			2	265	85	165	≤50m																	
464KG			2	265	85	165	≤50m																	
472KG			2	265	85	165	≤50m																	
480KG			2	265	85	165	≤50m																	
488KG			2	265	85	165	≤50m																	
496KG			2	265	85	165	≤50m																	
504KG			2	265	85	165	≤50m																	
512KG			2	265	85	165	≤50m																	
520KG			2	265	85	165	≤50m																	
528KG			2	265	85	165	≤50m																	
536KG			2	265	85	165	≤50m																	
544KG			2	265	85	165	≤50m																	
552KG			2	265	85	165	≤50m																	
560KG			2	265	85	165	≤50m																	
568KG			2	265	85	165	≤50m																	
576KG			2	265	85	165	≤50m																	
584KG			2	265	85	165	≤50m																	
592KG			2	265	85	165	≤50m																	
600KG			2	265	85	165	≤50m																	
608KG			2	265	85	165	≤50m																	
616KG			2	265	85	165	≤50m																	
624KG			2	265	85	165	≤50m																	
632KG			2	265	85	165	≤50m																	
640KG			2	265	85	165	≤50m																	
648KG			2	265	85	165	≤50m																	
656KG			2	265	85	165	≤50m																	
664KG			2	265	85	165	≤50m																	
672KG			2	265	85	165	≤50m																	
680KG			2	265	85	165	≤50m																	
688KG			2	265	85	165	≤50m																	
696KG			2	265	85	165	≤50m																	
704KG			2	265	85	165	≤50m																	
712KG			2	265	85	165	≤50m																	
720KG			2	265	85	165	≤50m																	
728KG			2	265	85	165	≤50m																	
736KG			2	265	85	165	≤50m																	
744KG			2	265	85	165	≤50m																	
752KG			2	265	85																			

本教材的240课时教学计划，具体使用时根据教学需要灵活调整。（注意课时安排、组织观察等）；本教材的每课时教学计划，具体使用时根据教学需要灵活调整。（注意课时安排、组织观察等）；

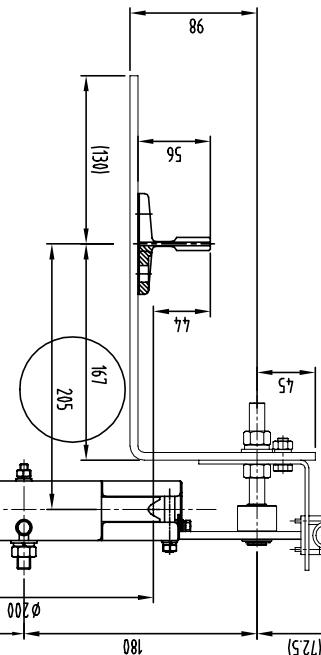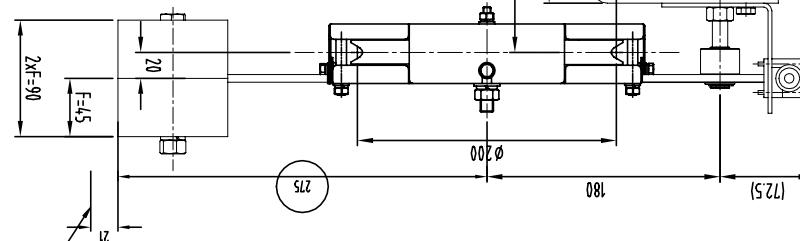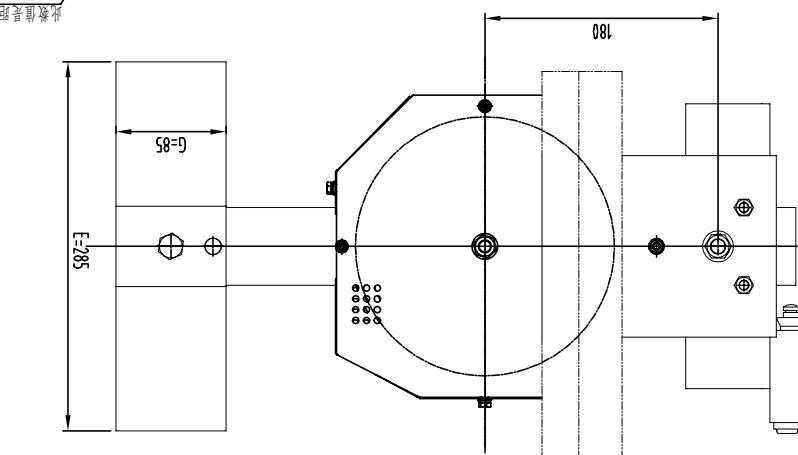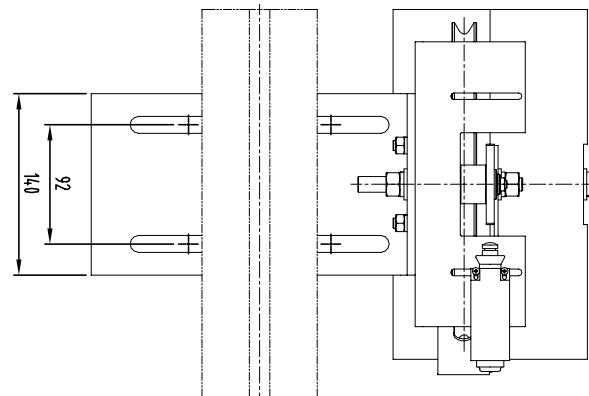

0235A/6.0	安裝底板	設計者	年月日	監督者	文件更換號	標準化	說明	設計者	工藝	第 1 頁	第 2 頁	共 2 頁	0X200.1-1

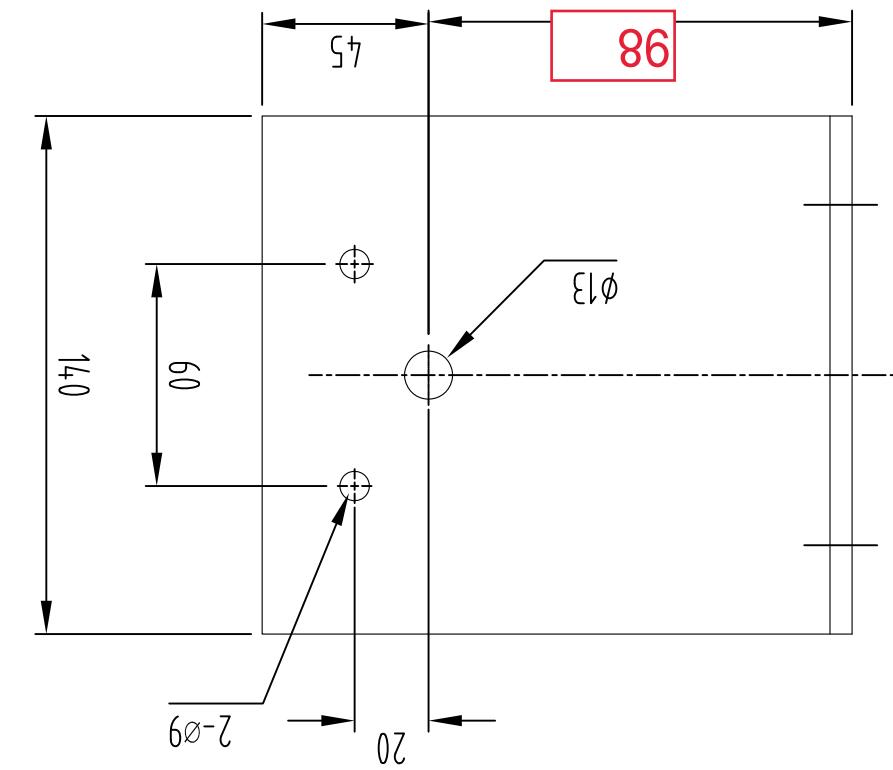

4-13×90

A=167

