
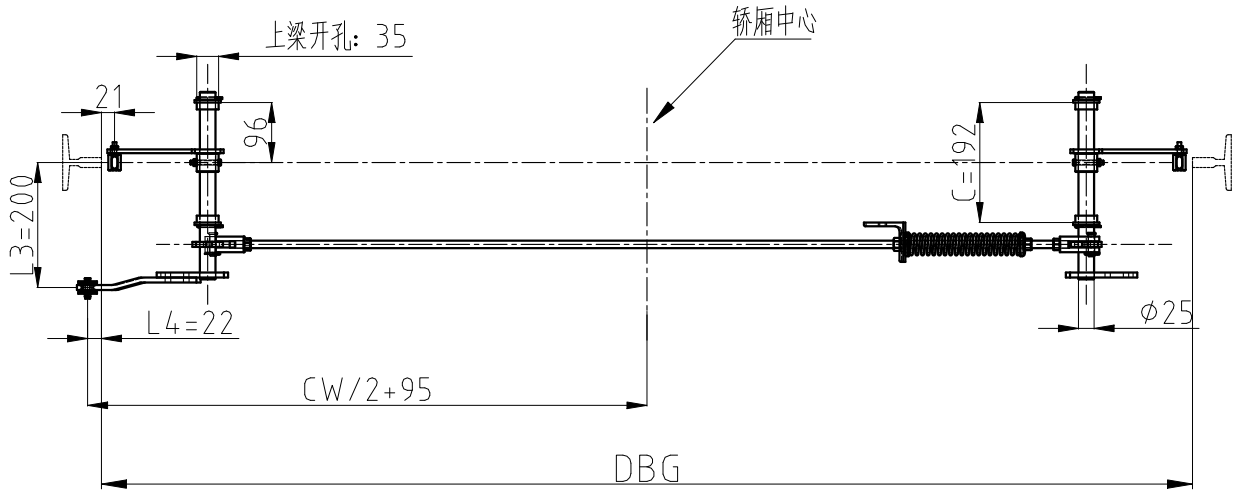




ALL DIMENSIONS METRIC

A3		LENGTH/ DIAMETER							RADIUS/ CHAMFER	ANGLE (shorter side length)			WELDS						
		0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000		0.5-3	>3-6	>6	0-10	>10-50	>50-120	>120-400	>400	OTHER SIDE	ARROW SIDE
		TOLERANCE	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	TOLERANCE	± 0.2	± 0.5	± 1	TOLERANCE	± 1°	± 0.5°	± 0.3°	± 0.15°	± 0.1°

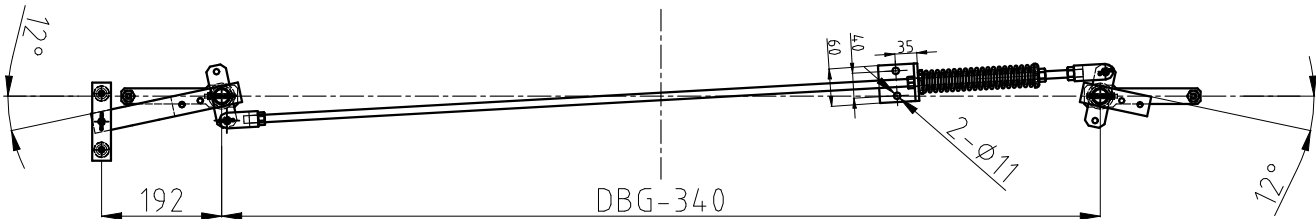

- 技术要求:
1. 提拉机构组件与上梁装配好出厂;
 2. CW为轿厢净宽, DBG为轿厢导轨距, C为上梁内档间距 (包括板厚6mm);
 3. 本图使用单提拉形式且DBG≥1050mm;
 4. 预紧提拉力建议值150N~200N

VKS3A378--	001	002	003	004	005	C01
轿厢净宽CW (mm)	1100	1200	1300	1400	1600	见订单
导轨距DBG (mm)	1246	1346	1446	1546	1746	CW+146

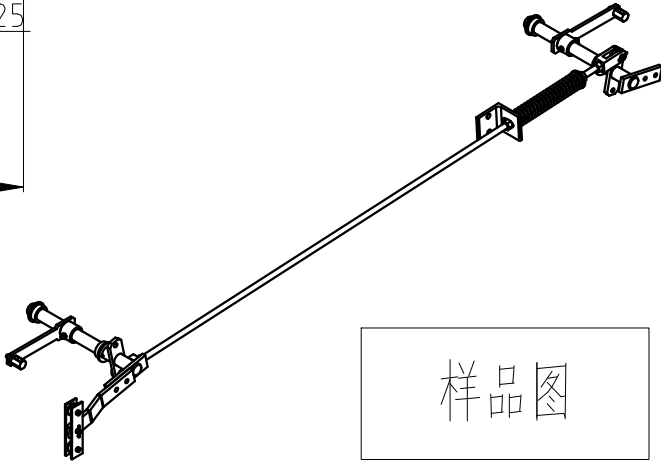

						Volkslift Schindler	提拉机构组件		VKS3A378		
							绘图 DRAWN 徐星涛	材料: 组件 MATERIAL:	首次下发版本 FIRST VERSION	重 量 WEIGHT	比 例 PROPORTION
						校对 CHK 闵传宏	23601			1:8	
						批准 APPD 陈国芳	日期 DATE 2023.6.30		SHEETS 1	1	SHEET
标记 MARK	更改原因及说明 CHANGE REASONS AND INSTRUCTIONS		更改日期 CHANGE DATE	更改 CHANGE	审查 CHECK	版本 VERSION					