
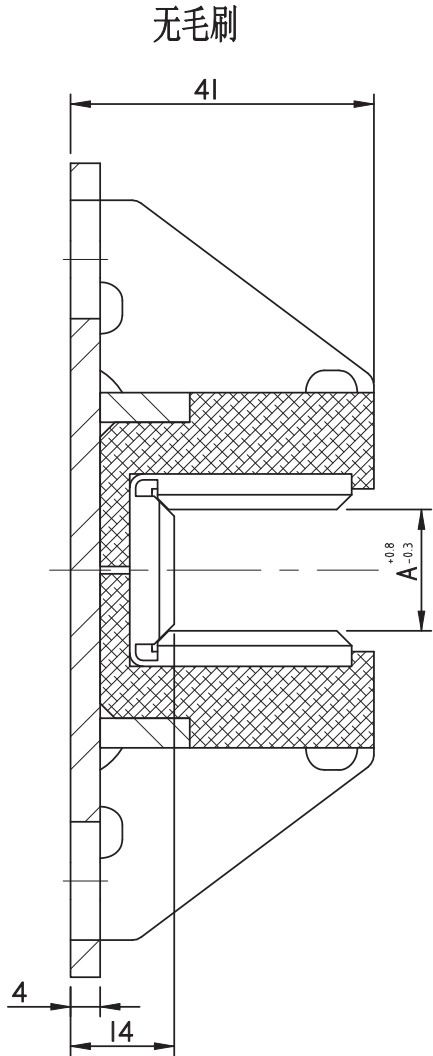


ALL DIMENSIONS METRIC

A3		LENGTH/ DIAMETER							RADIUS/ CHAMFER				ANGLE (shorter side length)						WELDS	
		0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000		0.5-3	>3-6	>6		0-10	>10-50	>50-120	>120-400	>400	OTHER SIDE	ARROW SIDE
		TOLERANCE	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2		TOLERANCE	± 0.2	± 0.5	± 1	TOLERANCE	± 1°	± 0.5°	± 0.3°	± 0.15°	± 0.1°	Z = LEG LENGTH ANSI/AWS A2.4-98 WELDING SYMBOLS ARE USED ON THIS DRAWING. REFER TO DRAWING AAA26ADJ FOR CONVERSION TO ISO SYMBOLS. 

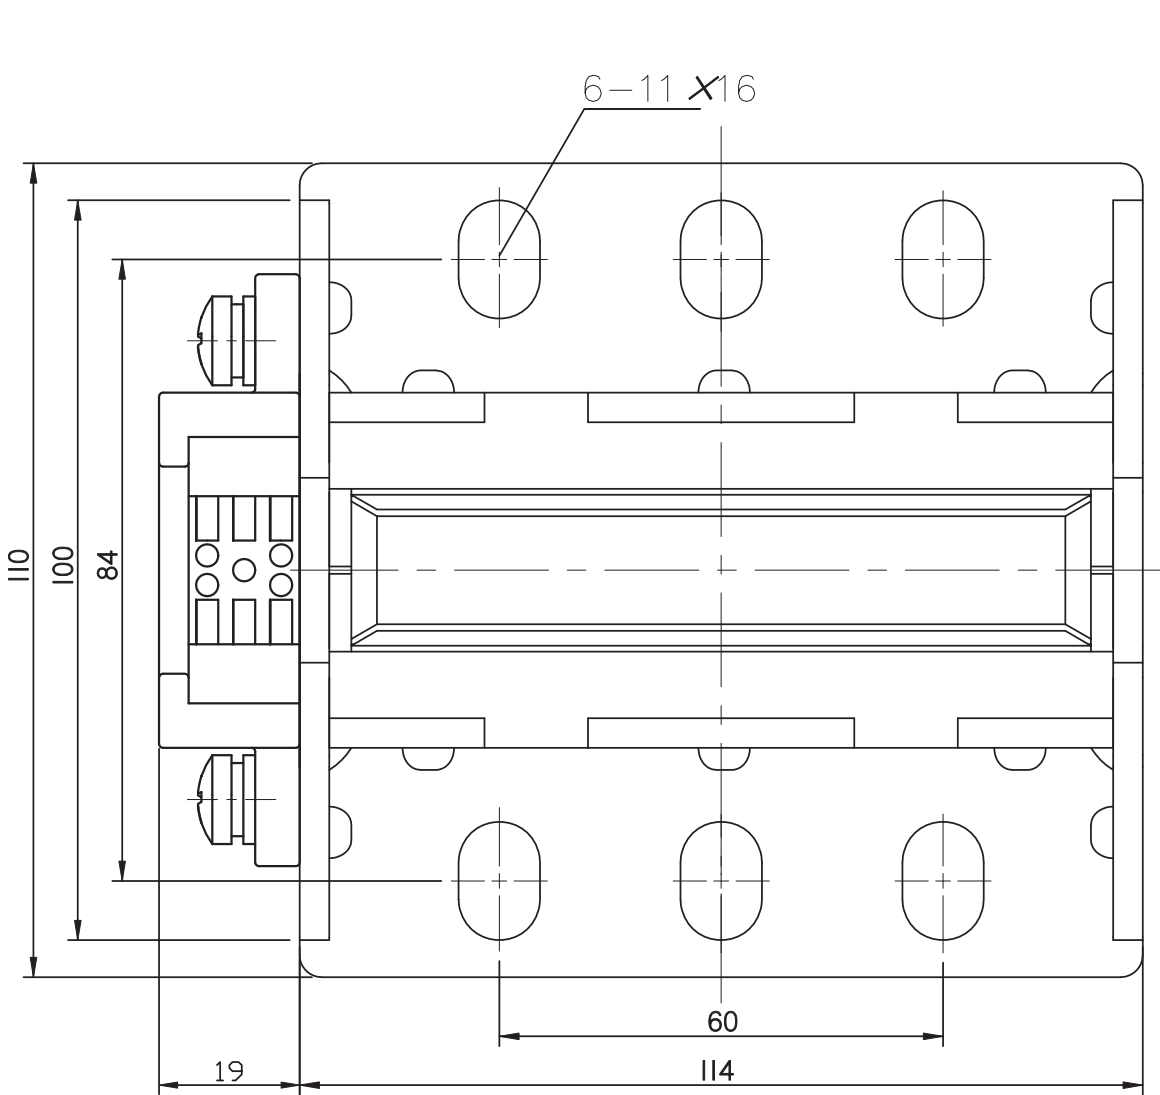

技术要求:
1.本件为免加油滑动导靴, 主要匹配于小载荷电梯, 适用速度≤1.75m/s;
2.导靴型号为OX-310T;
3.靴衬为高分子复合材料, 减震橡胶为天然橡胶。

件号	VKS3Z367---	001
图面参数	A	10

						Volkslift Schindler	滑动导靴 Slide Guide Shoe		VKS3Z367			
							绘图 DRAWN	崔 伟	材料: 组件 MATERIAL: Module	首次下发版本 FIRST VERSION	重 量 WEIGHT	比 例 PROPORTION
							校对 CHK	薛泽晖		25101		1:1
							批准 APPD	邱伟伟		SHEETS 2	1	SHEET
标记 MARK	更改原因及说明 CHANGE REASONS AND INSTRUCTIONS		更改日期 CHANGE DATE	更改 CHANGE	审查 CHECK	版本 VERSION	日期 DATE	2025/1/15				