
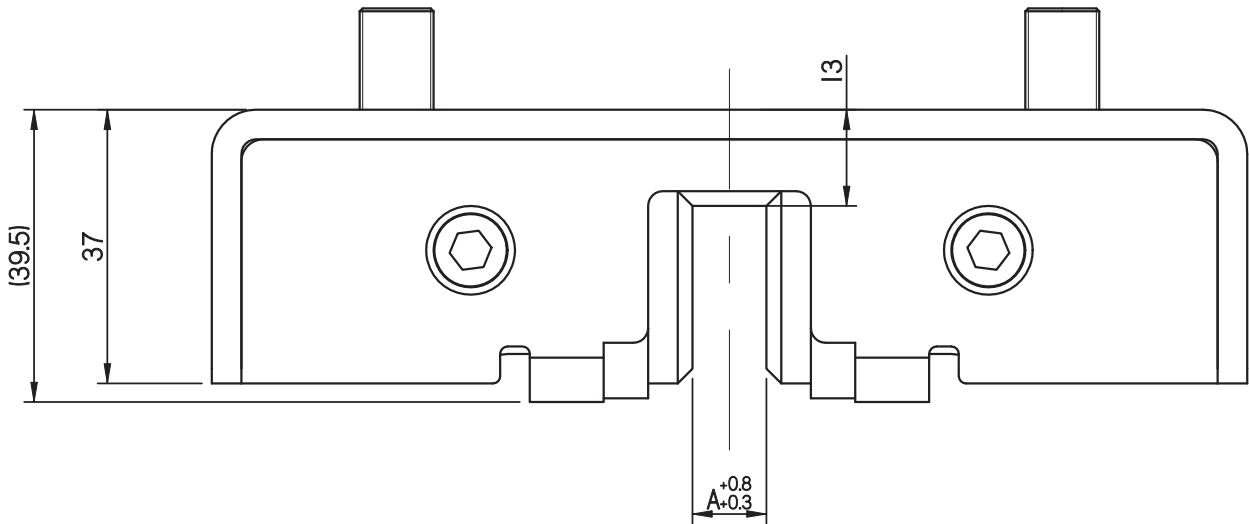
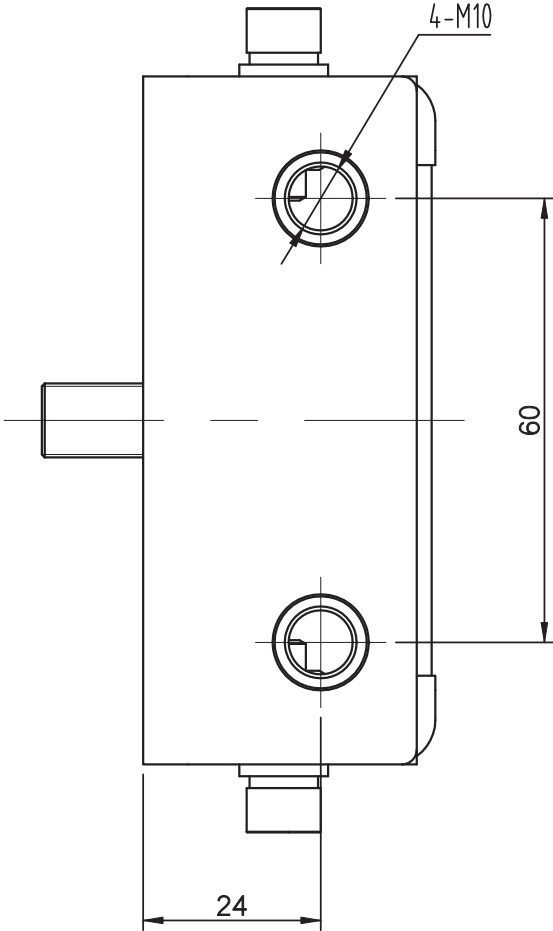


ALL DIMENSIONS METRIC

																		WELDS					
A3		LENGTH/ DIAMETER	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000	RADIUS/ CHAMFER	0.5-3	>3-6	>6	ANGLE (shorter side length)	0-10	>10-50	>50-120	>120-400	>400	Z = LEG LENGTH ANSI/AWS A2.4-98 WELDING SYMBOLS ARE USED ON THIS DRAWING. REFER TO DRAWING AAA26ADJ FOR CONVERSION TO ISO SYMBOLS.	OTHER SIDE	ARROW SIDE	
		TOLERANCE	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	TOLERANCE	± 0.2	± 0.5	± 1	TOLERANCE	± 1°	± 0.5°	± 0.3°	± 0.15°	± 0.1°				

配上2个内六角圆柱头螺钉GB/T70.1
M10×30

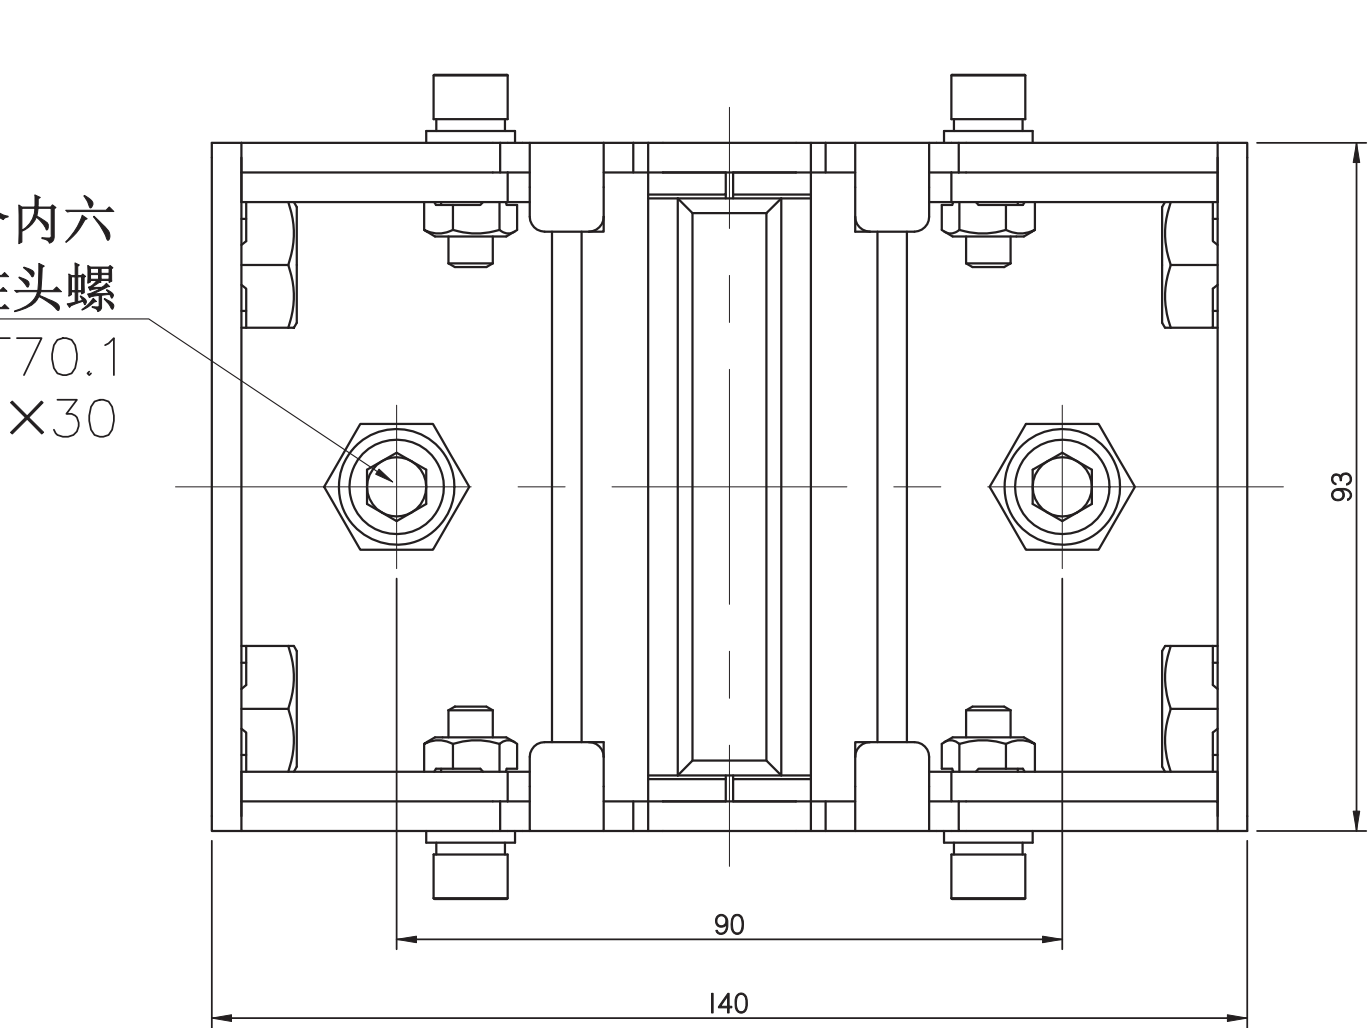

技术要求:
1.本件为免加油滑动导靴, 主要匹配于小载荷电梯, 适用速度≤1.0m/s;
2.导靴型号为OX-310TB;
3.靴衬为高分子复合材料, 减震橡胶为天然橡胶。

件号	VKS3Z367---	101
图面参数	A	10

						Volkslift Schindler		滑动导靴 Slide Guide Shoe		VKS3Z367		
						绘图 DRAWN	崔 伟	材料: MATERIAL:	组件 Module	首次下发版本 FIRST VERSION	重 量 WEIGHT	比 例 PROPORTION
						校对 CHK	薛泽晖			25101		1:1
						批准 APPD	邱伟伟					
标记 MARK	更改原因及说明 CHANGE REASONS AND INSTRUCTIONS		更改日期 CHANGE DATE	更改 CHANGE	审查 CHECK	版本 VERSION	日期 DATE			2025/1/15	SHEETS 2	2