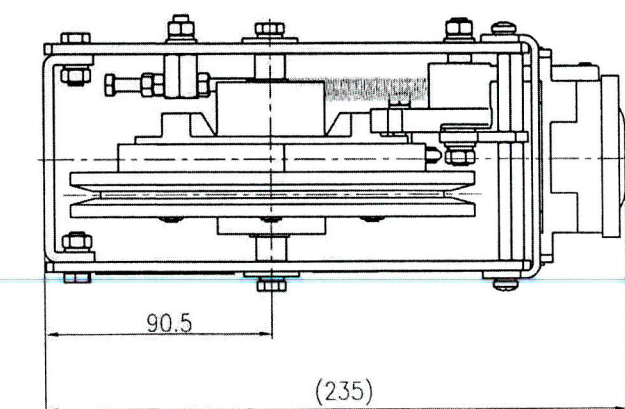





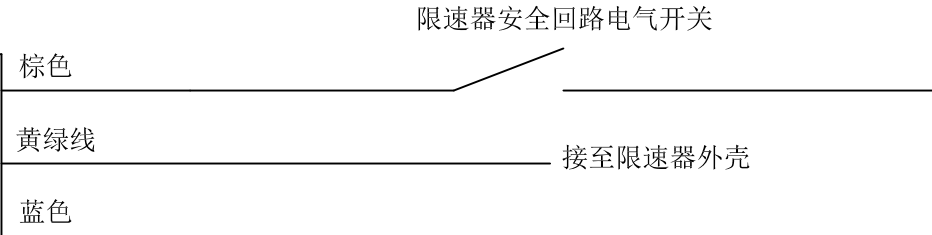
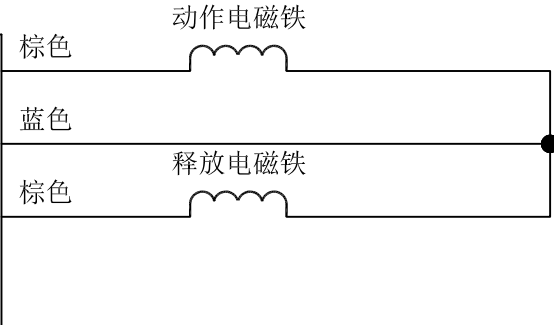
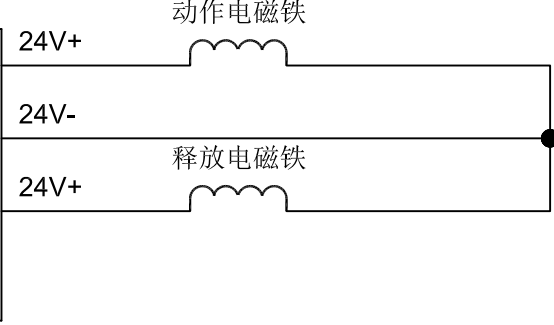


含接插件
接线参照:

- 1 本板板簧與滑塊OX-186A兩頭與器殼間;
- 2 配用銅絲直徑φ6;
- 3 彈簧與器殼預設半在彈簧位置處進行密封;
- 4 燒定式永久動作電阻數值電阻額DC24V;
- 5 彈簧與板簧力數值 ≥ 5000 設定;
- 6 本板與器殼結合GB/T 21719-2008承用牌號與器殼相符合要求;

受控文件
日期: 2025.7.4
部门: QAD PUA
发放人: 2025.7.4

[illegible]

																				焊接										
A3		基础尺寸	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000	辐射切割	>0.5-3	>3-6	>6	角度(短边)		0-10	>10-50	>50-120	>120-400	>400										
		公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	公差	±0.2	±0.5	±1	公差		±1'	±0.5'	±0.3'	±0.15'	±0.1'										
件号：GEL8B064001按此接线																														
AMP 3P母插件，型号：AMP-480701 插件打标“3M” AMP母插针，型号：350536													1	棕色												限速器安全回路电气开关				
													2	黄绿线	接至限速器外壳															
													3	蓝色																
件号：GEL8B064002按此接线																														
电磁铁电压AC220V时：													1	棕色												动作电磁铁				
													2	蓝色																
													3	棕色																
													4																	
电磁铁电压DC24V时：													1	24V+												动作电磁铁				
													2	24V-																
													3	24V+																
													4																	
△																														
旧底图总号																														
底图总号																														
				△										191226	周 雨	顾正龙	191220	绘 图	周 雨	20191114	首次发布版本	图号		GEL8B064						
签 字		日 期		△	1	增加DC24V电磁铁正负极描述								191226	周 雨	顾正龙	191220	校 对	李 勇	20191114	比例	1:1	名称		限速器接线					
				记号	处数	更 改 原 因 及 说 明								更改日期	更改者	审查者	变更版本	审 核	顾正龙	20191114	共 1 页	材料								
																					第 1 页									