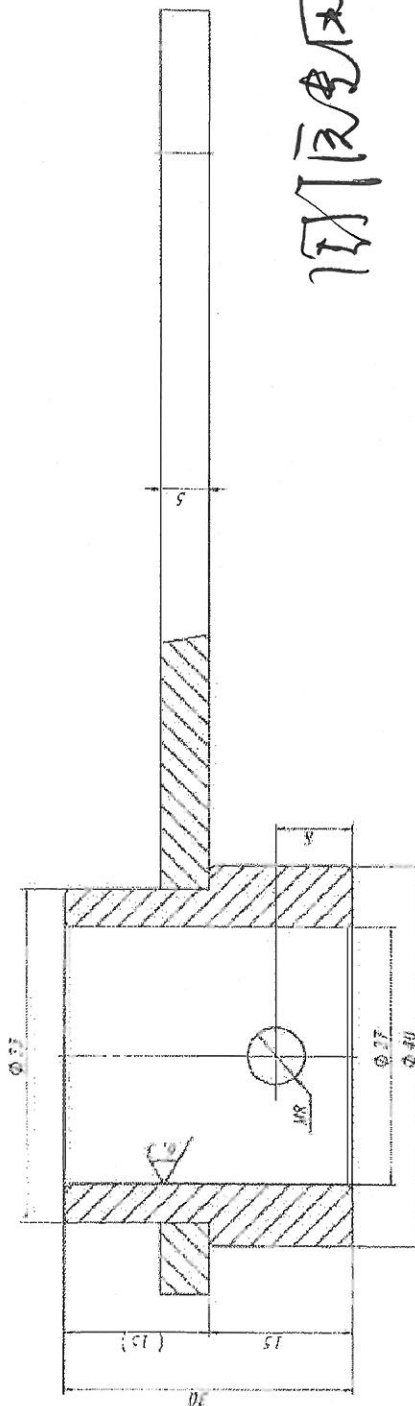
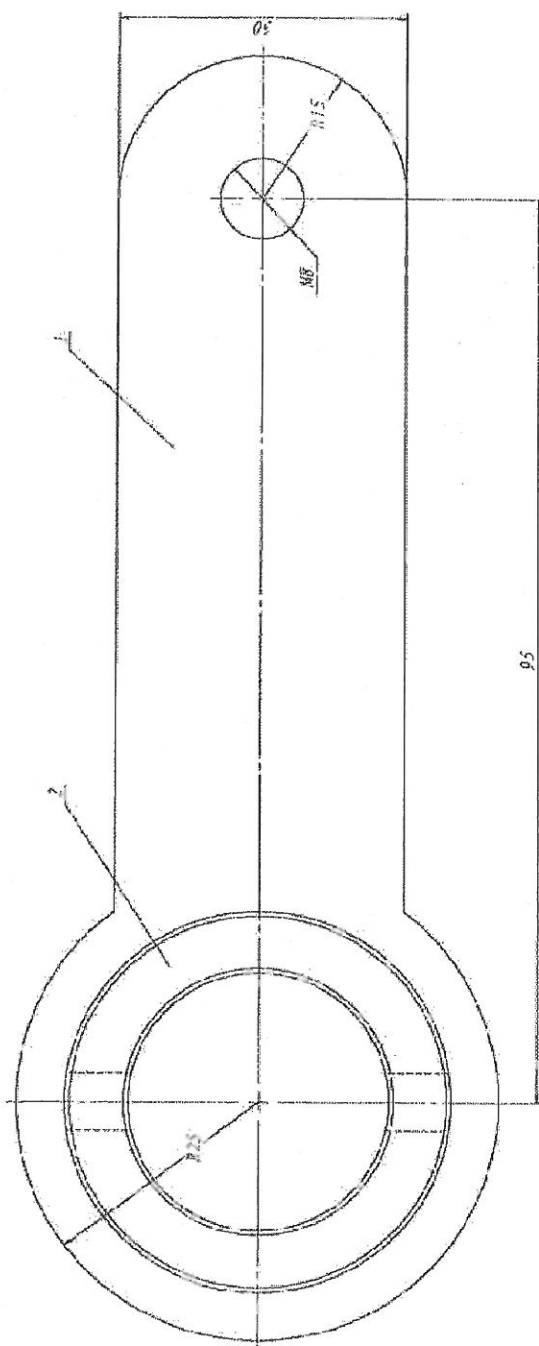





[illegible]

剛健剛成

技术说明：
1、本系统采用超透膜，渗透流量为15-20GPD，另外圆二点透膜，
以透膜流量为判定依据，处理处有液体在，桌面被渗透处理。

[illegible]

	0-8	9-17	18-31	32-63	64-127	128-255	256-511	512-1023	1024-2047	2048-4095	4096-8191	8192-16383	16384-32767	32768-65535	65536-131071	131072-262143	262144-524287	524288-1048575	1048576-2097151	2097152-4194303	4194304-8388607	8388608-16777215	16777216-33554431	33554432-67108863	67108864-134217727	134217728-268435455	268435456-536870911	536870912-1073741823	1073741824-2147483647	2147483648-4294967295	4294967296-8589934591	8589934592-17179869183	17179869184-34359738367	34359738368-68719476735	68719476736-137438953471	137438953472-274877906943	274877906944-549755813887	549755813888-1099511627775	1099511627776-2199023255551	2199023255552-4398046511103	4398046511104-8796093022207	8796093022208-17592186044415	17592186044416-35184372088831	35184372088832-70368744177663	70368744177664-140737488355327	140737488355328-281474976710655	281474976710656-562949953421311	562949953421312-1125899906842623	1125899906842624-2251799813685247	2251799813685248-4503599627370495	4503599627370496-9007199254740991	9007199254740992-18014398509481983	18014398509481984-36028797018963967	36028797018963968-72057594037927935	72057594037927936-144115188075855871	144115188075855872-288230376151711743	288230376151711744-576460752303423487	576460752303423488-1152921504606846975	1152921504606846976-2305843009213693951	2305843009213693952-4611686018427387903	4611686018427387904-9223372036854775807	9223372036854775808-18446744073709551615	18446744073709551616-36893488147419103231	36893488147419103232-73786976294838206463	73786976294838206464-147573952589676412927	147573952589676412928-295147905179352825855	295147905179352825856-590295810358705651711	590295810358705651712-1180591620717411303423	1180591620717411303424-2361183241434822606847	2361183241434822606848-4722366482869645213695	4722366482869645213696-9444732965739290427391	9444732965739290427392-18889465931478580854783	18889465931478580854784-37778931862957161709567	37778931862957161709568-75557863725914323419135	75557863725914323419136-151115727451828646838271	151115727451828646838272-302231454903657293676543	302231454903657293676544-604462909807314587353087	604462909807314587353088-1208925819614629174706175	1208925819614629174706176-2417851639229258349412351	2417851639229258349412352-4835703278458516698824703	4835703278458516698824704-9671406556917033397649407	9671406556917033397649408-19342813113834066795298815	19342813113834066795298816-38685626227668133590597231	38685626227668133590597232-77371252455336267181194463	77371252455336267181194464-154742504910672534362388927	154742504910672534362388928-309485009821345068724777855	309485009821345068724777856-618970019642690137449555711	618970019642690137449555712-1237940039285380274899111423	1237940039285380274899111424-2475880078570760549798222847	2475880078570760549798222848-4951760157141521099596445695	4951760157141521099596445696-9903520314283042199192891391	9903520314283042199192891392-19807040628566084398385782783	19807040628566084398385782784-39614081257132168796771565567	39614081257132168796771565568-79228162514264337593543131135	79228162514264337593543131136-158456325028528675187086262271	158456325028528675187086262272-316912650057057350374172524543	316912650057057350374172524544-633825300114114700748345049087	633825300114114700748345049088-1267650600228229401496690098175	1267650600228229401496690098176-2535301200456458802993380196351	2535301200456458802993380196352-5070602400912917605986760392703	5070602400912917605986760392704-10141204801825835211973520785407	10141204801825835211973520785408-20282409603651670423947041570815	20282409603651670423947041570816-4056481920730334084789408314171	4056481920730334084789408314172-81129638
--	-----	------	-------	-------	--------	---------	---------	----------	-----------	-----------	-----------	------------	-------------	-------------	--------------	---------------	---------------	----------------	-----------------	-----------------	-----------------	------------------	-------------------	-------------------	--------------------	---------------------	---------------------	----------------------	-----------------------	-----------------------	-----------------------	------------------------	-------------------------	-------------------------	--------------------------	---------------------------	---------------------------	----------------------------	-----------------------------	-----------------------------	-----------------------------	------------------------------	-------------------------------	-------------------------------	--------------------------------	---------------------------------	---------------------------------	----------------------------------	-----------------------------------	-----------------------------------	-----------------------------------	------------------------------------	-------------------------------------	-------------------------------------	--------------------------------------	---------------------------------------	---------------------------------------	--	---	---	---	--	---	---	--	---	---	--	---	---	---	--	---	---	--	---	---	--	---	---	---	--	---	---	--	---	---	--	---	---	---	--	---	---	--	---	---	--	---	---	--	---	--	--

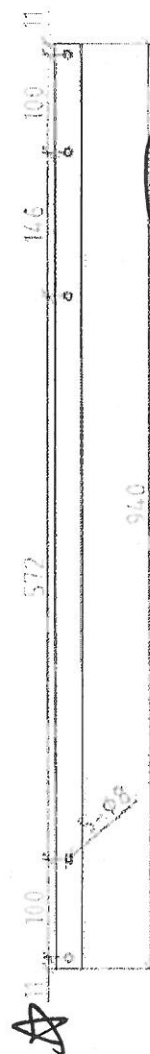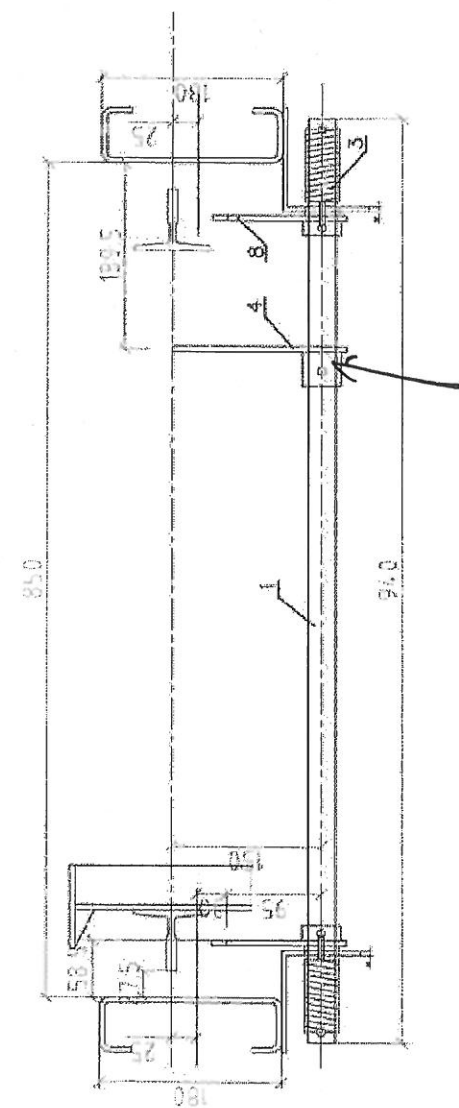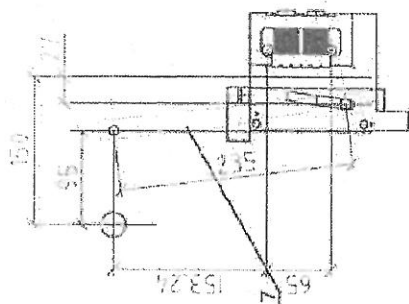[illegible]

32	0X210BT-2	封套	2	尾龙	0.02	0.04	
1	0X210BT-1	进杆	1	镀锌管	1.47	1.47	
序号	代号	名称	数量	材料说明	重量	总重	备注

8	OX210BT-3(CY) 扭簧组件	2	0.28	0.56
7	OX210BT-3 扭簧板	2	Q235A/4.0	0.15 0.3
6	OX210BT.2 扭簧组件	1	0.30	0.3
5	OX210AT-2 开关打钉	1	Q235	0.13 0.13
4	OX210BT.1 拉手组件	1	0.47	0.47
3	OX210AT-3 扭簧	2	0.16	0.32

借用OX-210

[illegible]

寧波廣濟醫院

安全联动机制

0x210BT

1954年4月
主要是逐字逐句研究
其餘部分另行研究

五、(20分) 证明: 若 $f(x)$ 在 $[a, b]$ 上连续, 且 $f(a) = f(b)$, 则存在 $\xi \in (a, b)$, 使得 $f'(\xi) = 0$.

財政部



100

一、

Journal of Interpersonal Violence 26(10)

E-921 1/8

线型尺寸	0.5~6	>6~30	>30~120	>120~400	>400~1000	>1000~2000	>2000~40000	半径/高度尺寸	0.5~3	>3~6	>6~30	>30	短边尺寸	≤10	>10~50	>50~120	>120~400	>400
线型公差	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	切圆/倒角公差	±0.2	±0.5	±1.0	±2.0	角度公差	±1°	±30'	±20'	±10'	±5'

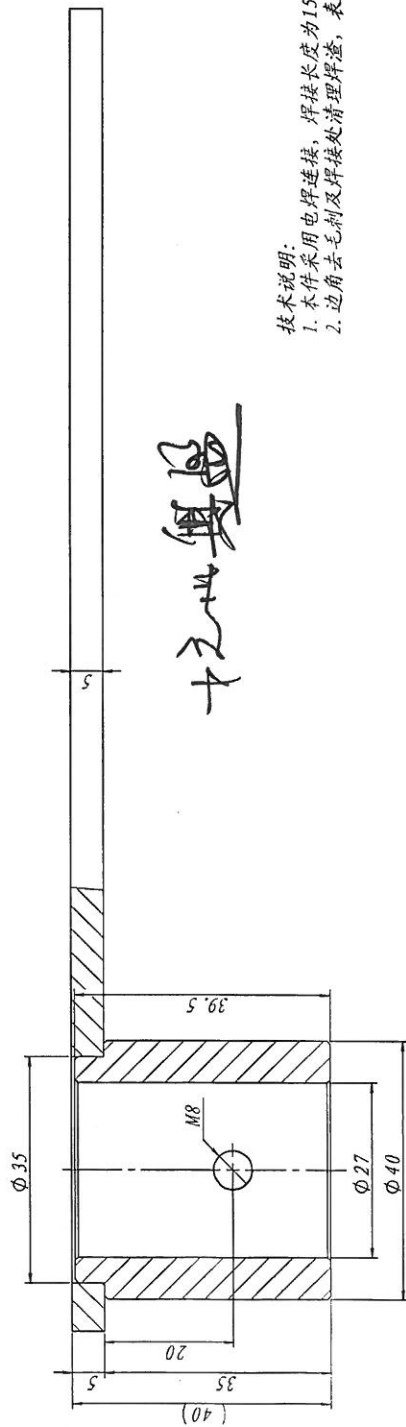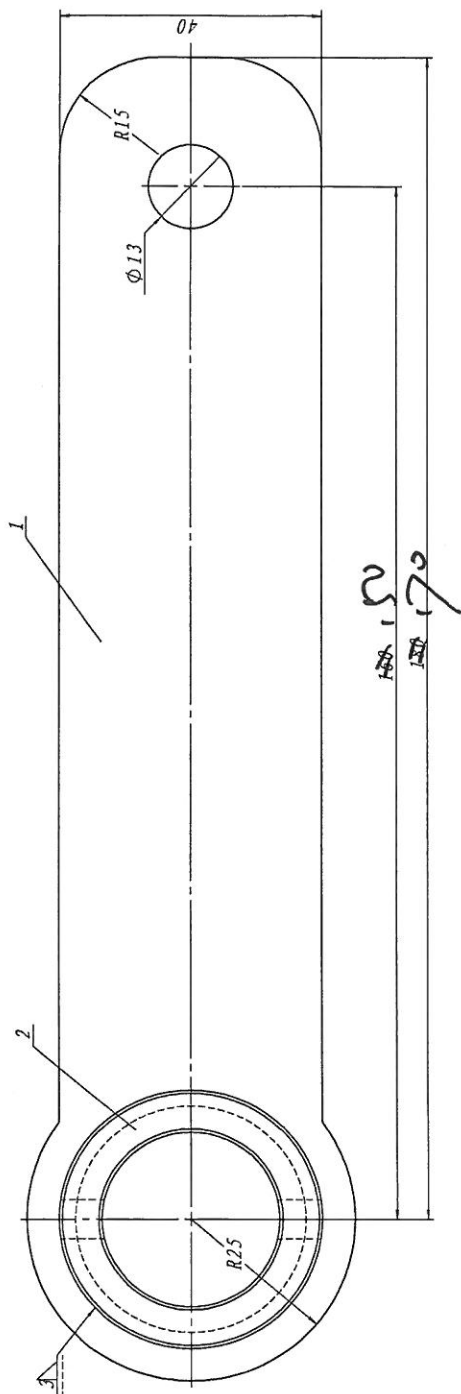

技术说明:

1. 1. 1. 零件采用电焊连接, 焊接长度应为 $15\sim 20\text{mm}$, 沿外圆三点均有;
2. 2. 2. 边角去毛刺及焊接处清理焊渣, 表面镀锌处理。

銀之十

[illegible]