

8

|     |   |   |   |
|-----|---|---|---|
| 120 | m | 3 | y |
|-----|---|---|---|

1

## 類 A

---

—

310

卷一百一十五

OX-20

地源热泵与

117

1

Technical drawing of a building floor plan. The drawing includes dimensions: 180 (vertical), 133 (horizontal), 25 (top left), 270 (top right), 268 (top right), 92 (right), and 175 (bottom right). There are also labels: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100. The drawing shows a complex layout with various rooms and corridors, with dimensions indicating the size of the building and its components.

Technical drawing of a rectangular plate with the following specifications:

- Overall dimensions: 310 (width) x 260 (height).
- Top edge features two holes, each with a diameter of  $2-\phi 10$ .
- Bottom edge features two holes, each with a diameter of  $4-\phi 15$ .
- Left edge features two holes, each with a diameter of  $4-M8$ .
- Right edge features two holes, each with a diameter of  $4-M8$ .
- Dimensions for hole placement: 50 (distance from bottom edge to the first hole), 140 (distance between the two holes), and 240 (distance from the top edge to the first hole).

FB-XOA2531ABT006-B42132

88/0020 1.75m S 8

底板材料

[illegible]

杭州西奥电梯有限公司

X0A2531ABT

0X240 展 示 區


CA#: CA-D170414

|      |           |           |      |      |       |
|------|-----------|-----------|------|------|-------|
| 一般公差 | GB/T 1804 | GB/T 1804 | 未注公差 |      | H7/g6 |
|      |           |           | IT12 | IT13 |       |
| 精密公差 | GB/T 1804 | GB/T 1804 | 未注公差 |      | H7/g6 |
|      |           |           | IT6  | IT7  |       |




(52=H)2-042X0

| 基本尺寸 | 0-6 | 6-30 | 30-120 | 120-400 | 400-1000 | 1000-2000 | 2000-4000 |
|------|-----|------|--------|---------|----------|-----------|-----------|
| 未注公差 | 0.1 | 0.2  | 0.3    | 0.5     | 0.8      | 1.2       | 2.0       |

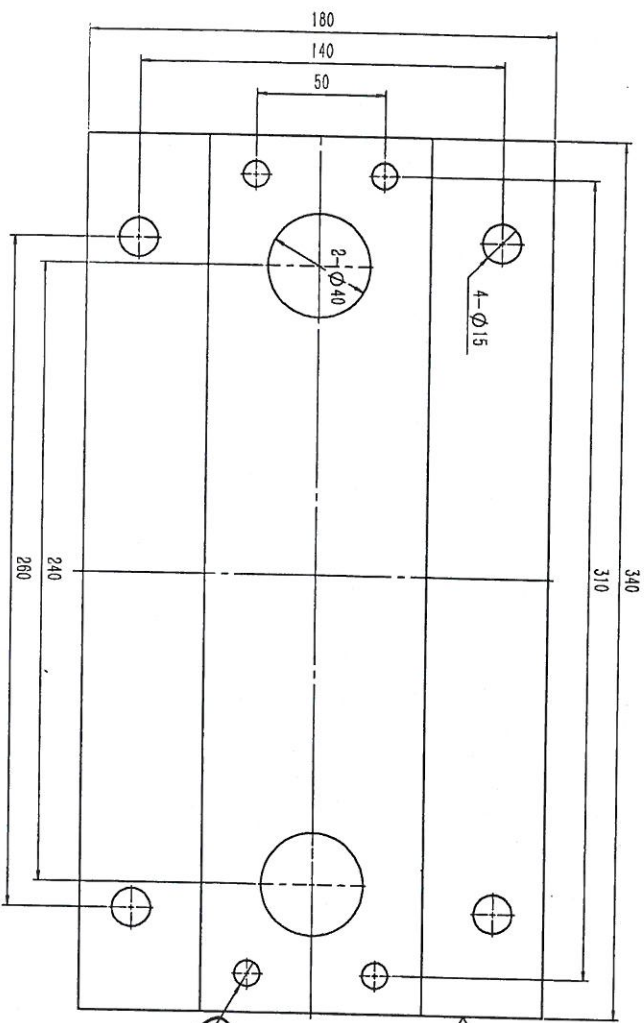


12.5  
面

4-此处背面采用弹接螺母M8

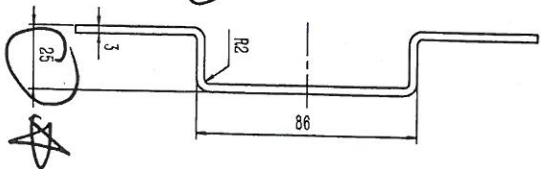

其余

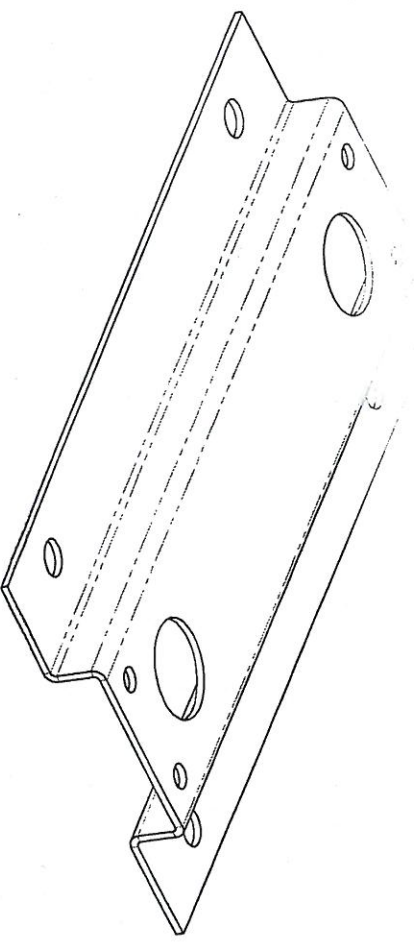

8000045 杭州 2012.12.20 2037 康

2. 未注明公差  
3. 未注明公差

|    |    |    |       |    |       |           |  |  |  |               |  |
|----|----|----|-------|----|-------|-----------|--|--|--|---------------|--|
| 标记 | 数量 | 分区 | 文件更改号 | 签名 | 年、月、日 | Q235A/3.0 |  |  |  | 宁波奥德普电焊附件有限公司 |  |
| 设计 |    |    | 标准化   |    |       | 阶段标记      |  |  |  | 安装底座(西奥非标)    |  |
| 校对 |    |    |       |    |       | 共 张       |  |  |  | OX240-3(H=25) |  |
| 审核 |    |    |       |    |       | 1.65      |  |  |  |               |  |
| 工艺 |    |    |       |    |       | 1.2       |  |  |  |               |  |